

11/13/00

10613 U.S. PTO

11-14-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

09792909-4679

First Named Inventor or Application Identifier

Keiichi Nito

Express Mail Label No: EL654782545US

10613 U.S. PTO

09/11/00

11/13/00

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Specification Total Pages 157
2. ☒ Drawing(s) (35USC 113) Total Pages 39
3. ☒ Declaration and Power of Attorney Total Pages 4
 - a. ☒ Unexecuted(original or copy)
 - b. ☐ Copy from prior application (37CFR 1.63(d))
(for continuation/divisional with Box 14 completed)
 - i. ☐ [Note Box 4 Below]
DELETION OF INVENTOR(S)
Signed statement attached deleting Inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
4. ☐ Incorporation By Reference (usable if Box 3b is checked)
The entire disclosure of the prior application, from which
a copy of the oath or declaration is supplied under Box 3b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

ACCOMPANYING APPLICATION PARTS

5. ☐ Assignment Papers (cover sheet & documentation)
6. ☒ Letter under 37 CFR 1.41(c).
7. ☐ English Translation Document (if applicable)
8. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
9. ☒ Preliminary Amendment
10. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
11. ☐ Small Entity ☐ Statement filed in prior Application, Status still proper and desired
12. ☒ Certified copy of Japanese priority applications Nos. P11-322184 filed November 12, 1999, P11-322185 filed November 12, 1999, P11-322186 filed November 12, 1999, P11-322187 filed November 12, 1999 and P2000-319879 filed October 19, 2000

14. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) ☐ of prior application No:

CLAIMS AS FILED

	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) BASIC FEE \$710.00
TOTAL CLAIMS	20	162	142	18.00	2,556.00
INDEPENDENT CLAIMS	03	14	11	80.00	880.00
		ANY MULTIPLE DEPENDENT CLAIMS? <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			0.00
				TOTAL FEE	\$4,146.00

☒ The Commissioner is hereby authorized to charge any additional fees which may be required in connection with this application, or credit any overpayment to ACCOUNT NO. 19-3140. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$4,146.00 to cover the filing fee is enclosed.

15. CORRESPONDENCE ADDRESS: David R. Metzger
SONNENSCHN NATH & ROSENTHAL
P.O. Box #061080
Wacker Drive Station, Sears Tower
Chicago, IL 60606-1080
Customer ID #26263
Telephone (312) 876-8000 - Fax (312) 876-7934

SIGNATURE

David R. Metzger (Reg. No. 42,919)

Date: November 13, 2000

U-11

EXPRESS MAIL #EL654782545US

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" Mailing Label Number: EL654782545US

Date of Deposit: November 13, 2000

I hereby certify that this correspondence is being deposited with the United States Postal "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to The Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Applicant(s): Keiichi Nito, et al.

Attorney Docket No. 09792909-4679

\$4,146.00 Filing Fee (162 claims-14 independent)

- deposit account #9-3140


Drawings (39 sheets - Figs. 1A-38)

Unexecuted Declaration

Letter Under Rule 37

Preliminary Amendment

Return postcard

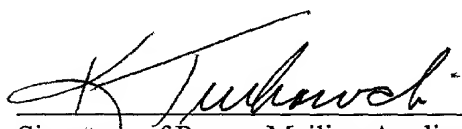

Signature of Person Mailing Application and Fees



Sonnenschein
SONNENSCHN NATH & ROSENTHAL

David R. Metzger
312/876-2578

8000 Sears Tower
233 South Wacker Drive
Chicago, IL 60606
312.876.8000
312.876.7934 fax
www.sonnenschein.com

Chicago
Kansas City
Los Angeles
New York
San Francisco
St. Louis
Washington, D.C.

November 13, 2000

Assistant Commissioner of Patents
Washington, D.C. 20231

RE: New U.S. Application for Letters Patent entitled
"LIGHT MODULATION APPARATUS AND IMAGE PICKUP
APPARATUS, AND DRIVE METHOD THEREOF"
Applicant(s): Keiichi Nito, et al.
Attorney Docket No. 09792909-4679

Dear Sir

Under the provisions of 37 C.F.R. §1.41(c), I am filing the attached application,
including 162 claims (14 independent), 39 sheets of drawings (Figs. 1A-38) and \$4,146.00
filing fee on behalf of

KEIICHI NITO and TORU UDAKA

and request that the application be assigned a serial number and filing date pursuant to the
provisions of 37 C.F.R. §1.53(b) and 37 C.F.R. §1.53(d).

Very truly yours,

SONNENSCHN NATH & ROSENTHAL

By:


David R. Metzger

Enclosures

T

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PRELIMINARY AMENDMENT ACCOMPANYING APPLICATION

APPLICANT: Keiichi Nito, et al. ATTY. DOCKET NO. 09792909-4679

SERIAL NO.

DATE FILED:

INVENTION: "LIGHT MODULATION APPARATUS AND IMAGE PICKUP
APPARATUS, AND DRIVE METHOD THEREOF"

Assistant Commissioner of Patents
Washington, D.C. 20231


S I R:

Between the title and the heading "Background of the Invention" on page 1, insert the following:

--RELATED APPLICATION DATA

The present application claims priority to Japanese Applications Nos. P11-322184 filed November 12, 1999, P11-322185 filed November 12, 1999, P11-322186 filed November 12, 1999, P11-322187 filed November 12, 1999 and P2000-319879 filed October 19, 2000, which applications are incorporated herein by reference to the extent permitted by law.

Respectfully submitted,

 (Reg. No. 32,919)

David R. Metzger
SONNENSCHN NATH & ROSENTHAL
P.O. Box #061080
Wacker Drive Station
Sears Tower
Chicago, IL 60606-1080
Customer #26263

Attorneys for Applicant(s)

LIGHT MODULATION APPARATUS AND IMAGE PICKUP APPARATUS,
AND DRIVE METHODS THEREOF

BACKGROUND OF THE INVENTION

The present invention relates to a light modulation apparatus for modulating the quantity of incident light and outputting the modulated light and an image pickup apparatus using the light modulation apparatus, and methods of driving the light modulation apparatus and the image pickup apparatus.

Light modulation apparatuses have been known of a type including a liquid crystal cell, typically, a twisted nematic (TN) type liquid crystal cell or a guest-host type liquid crystal cell (GH cell), and a polarizing plate.

Figs. 1A and 1B are schematic views showing an operational principal of a related art light modulation apparatus mainly including a polarizing plate 1 and a GH cell 2, and Fig. 1C is a graph showing a rectangular waveform of a drive voltage to be applied to the GH cell 2. In the figures, for an easy understanding of description, components of a liquid crystal device other than the GH cell 2, for example, two glass substrates between which the GH cell 2 is held, operational

electrodes, and liquid crystal alignment films formed on the substrates are omitted. The GH cell 2 contains liquid crystal molecules 3 and dichroic dye molecules 4. The dichroic dye molecules 4 have a positive type (p-type) light absorption anisotropy capable of absorbing light in the alignment direction of major axes of the molecules, and the liquid crystal molecules 3 have a positive type (p-type) dielectric constant anisotropy.

Fig. 1A shows a state of the GH cell 2 when no voltage is applied thereto. Incident light 5, which passes through the polarizing plate 1, is linearly polarized by the polarizing plate 1. In this related art light modulation apparatus, since the polarization direction of the linearly polarized light corresponds to the alignment direction of the major axes of the dichroic dye molecules 4, the light is absorbed in the dichroic dye molecules 4, with a result that the transmittance of the GH cell 2 is reduced.

When a voltage having a rectangular waveform shown in Fig. 1C is applied to the GH cell 2 as shown in Fig. 1B, the alignment direction of the major axes of the dichroic dye molecules 4 becomes perpendicular to the polarization direction of the linearly polarized light, with a result that the light is little absorbed in the GH

cell 2, that is, most of the light passes through the GH cell 2.

In the case of using a GH cell including a negative type (n-type) dichroic dye molecules capable of absorbing light in the alignment direction of minor axes of the molecules, the relationship between light absorption and light transmission of the GH cell is reversed to that of the GH cell 2 including the positive type dichroic dye molecules 4. To be more specific, the light is not absorbed in the GH cell including the negative type dichroic dye molecules when no voltage is applied thereto, and light is absorbed in the GH cell including the negative type dichroic dye molecules when a voltage is applied thereto.

An optical density (absorbance) ratio of the light modulation apparatus shown in Figs. 1A to 1C, that is, a ratio of an optical density of the apparatus upon application of a voltage to an optical density thereof upon application of no voltage is about 10. This optical density ratio of the apparatus shown in the figures is as large as about twice an optical density ratio of a light modulation apparatus including only the GH cell 2 without use of the polarizing plate 1.

The related art light modulation apparatus shown in

the figures has a problem. Since the polarizing plate 1 is fixed in an effective optical path of light, part of light, for example, 50% of light is usually absorbed in the polarizing plate 1, and further light may be reflected from the surface of the polarizing plate 1. As a result, the maximum transmittance of light passing through the polarizing plate 1 cannot exceed a certain value, for example, 50%, and accordingly, the quantity of light passing through the light modulation apparatus is significantly reduced by light absorption of the polarizing plate 1. This problem is one of factors which make it difficult to put a light modulation apparatus using a liquid crystal cell into practical use.

On the other hand, various kinds of light modulation apparatuses using no polarizing plate have been proposed. Examples of these apparatuses include a type using a stack of two GH cells in which the GH cell at the first layer absorbs a polarization component in the direction identical to that of polarized light and the GH cell at the second layer absorbs a polarization component in the direction perpendicular to the polarized light; a type making use of a phase transition between a cholesteric phase and a nematic phase of a liquid crystal cell; and a high polymer scattering type making use of

scattering of liquid crystal.

These light modulation apparatuses using no polarizing plate have a problem. Since the optical density (absorbance) ratio between upon application of no voltage and upon application of a voltage is, as described above, as small as only 5, the contrast ratio of the apparatus is too small to normally carry out modulation of light at any location in a wide range from a bright location to a dark location. The light modulation apparatus of the high polymer scattering type has another problem in significantly degrading, when the apparatus is used for an image pickup apparatus, the image formation performance of an optical system of the image pickup apparatus.

The related art light modulation apparatus presents a further problem. Since the transmittance in a transparent state may become dark depending on the kind of a liquid crystal device used for the apparatus, if an image pickup apparatus provided with the light modulation apparatus is intended to pickup image with a sufficient light quantity in such a transparent state, the light modulation apparatus is required to be removed from an optical system of the image pickup apparatus.

The related art light modulation apparatus has the

following problem associated with the drive thereof. To drive the related art light modulation apparatus, the transmittance has been controlled by modulating a magnitude of a DC voltage or AC voltage applied to the apparatus; however, for the light modulation apparatus at a consumer level, it is difficult to accurately perform voltage control and to obtain a characteristic having a low threshold value; a limitation lies in the number of gradation of the transmittance level; and D/A conversion is required for voltage control based on the intensity of transmission light, to raise a circuit cost.

The drive of the related art light modulation apparatus, particularly, of a type including a negative type liquid crystal having a negative dielectric constant anisotropy has another problem. In the related art light modulation apparatus, the transmittance has been changed with a large step from a current transmittance into a target transmittance; however, upon such a change in transmittance with a large step, particularly, from a transmittance in a transparent state into a transmittance in a light shield state, there occurs a defect in alignment of liquid crystal molecules, resulting in unstable optical characteristics, for example, in-plane non-uniformity in transmittance (which will be described

later).

To be more specific, when a voltage applied to the liquid crystal is changed with a large step for changing the transmittance with a large step, there occurs a transient state in which liquid crystal molecules are aligned in different directions, and if such a transient state continues for a time being long enough to exert an effect on the transmittance, there appears in-plane non-uniformity in transmittance. In general, the transient state disappears after an elapse of a certain time required for re-alignment of liquid crystal molecules and pigment molecules; however, in the worst case, the transient state may partially remain even after an elapse of a long time.

A further problem of the drive of the related art light modulation apparatus is that even in a state in which drive pulses with a specific control waveform are applied to a liquid crystal device of the light modulation apparatus, there occurs a variation in transmittance due to a change in temperature of the environment in which the apparatus is disposed.

SUMMARY OF THE INVENTION

A first object of the present invention is to

provide a light modulation apparatus capable of improving the transmittance, enhancing the contrast ratio, and keeping constant the quantity of light.

To achieve the first object, according to a first invention, there are provided a light modulation apparatus including a liquid crystal device and a polarizing plate disposed in an optical path of light made incident on the liquid crystal device, wherein the liquid crystal device is a guest-host type liquid crystal device using a negative type liquid crystal as a host material, and an image pickup apparatus including the light modulation apparatus disposed in an optical path of an optical system of the image pickup system.

The negative type liquid crystal of the liquid crystal device may have a negative dielectric constant anisotropy, and the guest material may be a positive type or negative type dichroic dye molecular material.

With the above configurations of the first invention, a negative type liquid crystal having a negative type dielectric constant anisotropy ($\Delta\epsilon$) is used as the host material constituting part of the liquid crystal device disposed on the optical path, and accordingly, the transmittance upon light transmission, particularly, in a transparent state can be largely

improved as compared with a light modulation device including a liquid crystal device using a positive type liquid crystal ($\Delta\epsilon > 0$), and thereby the light modulation apparatus can be fixedly positioned in an optical system of the image pickup apparatus.

The light modulation apparatus of the first invention, in which the polarizing plate is disposed in the optical path of light made incident on the above-described unique liquid crystal device, is further advantageous in that an optical density (absorbance) ratio of the apparatus between upon application of no voltage and upon application of a voltage is improved, to increase the contrast ratio of the apparatus, thereby normally carrying out modulation of light at any location in a wide range from a bright location to a dark location.

A second object of the present invention is to provide a light modulation apparatus capable of easily, accurately controlling the transmittance, reducing a threshold value, improving the number of gradation, simplifying a drive circuit, and lowering the cost, an image pickup apparatus using the light modulation apparatus, and methods of driving the light modulation apparatus and the image pickup apparatus.

To achieve the second object, according to a second

invention, there are provided a light modulation apparatus including a liquid crystal device, a drive pulse generation unit for driving the liquid crystal device, and a pulse width control unit for modulating a pulse width of each drive pulse thereby controlling the transmittance of light made incident on the liquid crystal device, and an image pickup apparatus including the light modulation apparatus disposed in an optical path of an optical system of the image pickup apparatus.

The pulse width of each drive pulse may be modulated with its pulse height kept constant. An average per unit time of positive and negative pulse heights of drive pulses applied between drive electrodes of the liquid crystal device upon modulation of the pulse width of each drive pulse may be preferably nearly zero for eliminating a bias action due to a DC component which is one of causes of flicker.

The modulation of the pulse width of each drive pulse may be performed in such a manner that the waveform of each drive pulse is present in a period of a basic frequency. The basic frequency and the modulated pulse width may be adjusted in such a manner as to prevent the occurrence of flicker in stationary drive of the light modulation apparatus. The light modulation apparatus may

further include a drive circuit unit, and each drive pulse whose waveform is present in the period of the basic frequency may be generated in synchronization with a clock generated by the drive circuit unit.

The light modulation apparatus may further include a control circuit unit, and may be configured such that luminance information of the light emerged from the liquid crystal device is fed back to the control circuit unit, and the pulse width of each drive pulse is modulated in synchronization with a clock generated by the drive circuit unit on the basis of a control signal supplied from the control circuit unit. The image pickup apparatus including the light modulation apparatus may further include an image pickup device disposed on the light outgoing side of the light modulation apparatus, and may be configured such that the drive circuit unit is provided in the image pickup device, and an output signal from the image pickup device is fed back as luminance information to the control circuit unit of the light modulation apparatus and the pulse width of each drive pulse is modulated in synchronization with a clock generated by the drive circuit unit on the basis of a control signal supplied from the control circuit unit.

With the above configurations of the second

invention, the transmittance is controlled by modulating the pulse width of each drive pulse applied to the liquid crystal device for light modulation, and accordingly, as compared with control of the transmittance by modulating the magnitude of a voltage, the transmittance can be easily, accurately controlled because the pulse width can be easily, accurately modulated in synchronization with a clock generated by the pulse width control unit; the change in transmittance by modulation of the pulse width is allowed to occur at a low threshold value; the transmittance can be easily, accurately controlled because the change in transmittance by modulation of the pulse width is relatively moderate; the number of gradation can be increased; and the need of D/A conversion can be eliminated to thereby reduce a circuit cost.

In particular, for a light modulation apparatus at a consumer level, the modulation of the pulse width of each drive pulse is advantageous in terms of its accuracy and easiness, and more particularly, in the case of mounting the light modulation apparatus in a recent digital control type equipment, the control of the pulse width on the time axis can be expected to realize a highly accurate control system of the equipment at a low

cost.

To achieve the second object, according to the second invention, there are also provided methods of driving a light modulation apparatus and an image pickup apparatus, each method including the step of driving a liquid crystal device by modulating the pulse width of each drive pulse applied to the liquid crystal device thereby controlling the transmittance of light made incident on the liquid crystal device.

The methods of driving the light modulation apparatus and image pickup apparatus according to the second invention are each advantageous in driving the light modulation apparatus and image pickup apparatus with a good controllability.

In this way, according to the second invention, it is very important that the unique means of modulating the pulse width of each drive pulse, whose waveform is selected for improving and stabilizing the optical characteristics of the liquid crystal device of the light modulation apparatus, is used for the drive of the liquid crystal device of the light modulation apparatus.

A third object of the present invention is to provide a light modulation apparatus capable of stably controlling the transmittance without occurrence of a

defect in alignment of liquid crystal molecules, an image pickup apparatus using the light modulation apparatus, and methods of driving the light modulation apparatus and the image pickup apparatus.

To achieve the third object, according to a third invention, there are provided a light modulation apparatus including a liquid crystal device, and a pulse control unit for changing the transmittance of light made incident on the liquid crystal device from a current transmittance into a target transmittance by applying drive pulses controlled with at least two-steps to the liquid crystal device, and an image pickup apparatus including the light modulation apparatus disposed in an optical path of an optical system of the image pickup apparatus.

The pulse height or pulse width of each drive pulse may be controlled with at least two-steps.

The light modulation apparatus may further include a drive circuit unit, and may be configured such that the drive pulse may be generated in synchronization with a clock generated by the drive circuit unit.

The light modulation apparatus may further include a control circuit unit, and may be configured such that luminance information of the light emerged from the

liquid crystal device is fed back to the control circuit unit, and each drive pulse is generated in synchronization with a clock generated by the drive circuit unit on the basis of a control signal supplied from the control circuit unit. The image pickup apparatus including the light modulation apparatus may further include an image pickup device disposed on the light outgoing side of the light modulation apparatus, and may be configured such that the drive circuit unit is provided in the image pickup device, and an output signal from the image pickup device is fed back as luminance information to the control circuit unit of the light modulation apparatus and each drive pulse is generated in synchronization with a clock generated by the drive circuit unit on the basis of a control signal supplied from the control circuit unit.

With the above configurations of the third invention, the drive pulses to be applied to the liquid crystal device for light modulation are controlled with at least two-steps (from a low voltage to a high voltage), and accordingly, as compared with the related art light modulation apparatus in which the voltage is steeply changed, the transmittance can be controlled to be uniform over the entire plane of the liquid crystal

device by applying a preparation pulse, whose height is low enough to prevent occurrence of a defect in alignment of liquid crystal molecules, thereby tilting the liquid crystal molecules to some extent, and then applying a final pulse required for achieving a desired transmittance.

To achieve the third object, according to the third invention, there are also provide methods of driving a light modulation apparatus and an image pickup apparatus, each method including the step of changing the transmittance of light made incident on a liquid crystal device from a current transmittance into a target transmittance by applying drive pulses controlled with at least two-steps to the liquid crystal device.

The methods of driving the light modulation apparatus and image pickup apparatus according to the third invention are each advantageous in driving the light modulation apparatus and image pickup apparatus with a good controllability.

A fourth object of the present invention is to provide a light modulation apparatus capable of stably controlling the transmittance, an image pickup apparatus using the light modulation apparatus, and methods of driving the light modulation apparatus and the image

pickup apparatus.

To achieve the fourth object, according to a fourth invention, there are provided a light modulation apparatus including a liquid crystal device, a detection unit for detecting the intensity of transmission light having passed through the liquid crystal device or an environmental temperature of the liquid crystal device, a control circuit unit for setting a target intensity of the transmission light depending on the environmental temperature of the liquid crystal device on the basis of a detection value supplied from the detection unit, and a drive signal generation unit for generating a drive signal used for generating the target intensity of the transmission light by the control circuit unit, and an image pickup apparatus including the light modulation apparatus disposed on an optical path of an optical system of the image pickup apparatus.

The light modulation apparatus may further include a control circuit unit, and may be configured such that the transmittance may be controlled by monitoring the transmission light, feeding back the detection information to the control circuit unit, and adjusting the intensity of the transmission light at a constant value, or monitoring an environmental temperature of the

liquid crystal device, feeding back the detection information to the control circuit unit, comparing the detection information with a predetermined characteristic value, and adjusting the intensity of the transmission light at a constant value.

The control circuit unit may generate each drive pulse having an AC waveform, whose pulse height is modulated, or each drive pulse whose pulse width or pulse density is modulated.

The light modulation apparatus may be configured such that the pulse width of each drive pulse having a basic waveform is modulated and the pulse height of the drive pulse is controlled depending on the environmental temperature of the liquid crystal device, or the pulse height of each drive pulse having a basic waveform is modulated and the pulse width of the drive pulse is modulated depending on the environmental temperature of the liquid crystal device.

The light modulation apparatus may further include a drive circuit unit, and may be configured such that each drive pulse may be generated in synchronization of a clock generated by the drive circuit unit.

With the above configurations of the fourth invention, an intensity of transmission light of the

liquid crystal device for light modulation or an environmental temperature of the liquid crystal device is detected, a target intensity of transmission light depending on the environmental temperature of the liquid crystal device is set on the basis of the detected intensity of the transmission light or environmental temperature, and a specific drive signal for realizing the target intensity of transmission light is generated, and accordingly, it is possible to realize the drive of the liquid crystal device while eliminating the effect of the environmental temperature as much as possible, and to drive the light modulation apparatus in such a manner that a target transmittance can be usually obtained by performing the temperature correction independently from the control of the transmittance.

To achieve the fourth object, according to the present invention, there are also provided methods of controlling a light modulation apparatus and an image pickup apparatus, each including the step of driving a liquid crystal device by detecting the intensity of transmission light having passed through the liquid crystal device or an environmental temperature of the liquid crystal device, setting a target intensity of the transmission light depending on the environmental

temperature of the liquid crystal device on the basis of a detection value supplied from the detection unit, and generating a drive signal used for generating the target intensity of the transmission light.

The methods of driving the light modulation apparatus and image pickup apparatus according to the fourth invention are each advantageous in driving the light modulation apparatus and image pickup apparatus with a good controllability.

The above-described first, second, third, and fourth inventions may be further configured as follows:

Each drive electrode of the liquid crystal device may be formed over the entire region of at least an effective light transmission portion. With this configuration, the transmittance over the entire width of an effective optical path can be collectively, accurately controlled by control of the pulse width of each drive pulse to be applied between the drive electrodes thus formed.

In the guest-host type liquid crystal device used for the light modulation apparatus, the host material may be a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy, and the guest material may be a positive or negative type

dichroic dye molecular material having a positive or negative type light absorption anisotropy.

The polarizing plate may be disposed in a movable portion of a mechanical iris, and may be moved in and from the optical path by operating the movable portion of the mechanical iris.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and 1B are schematic views showing an operational principle of a related art light modulation apparatus using a positive type liquid crystal and Fig. 1C is a graph showing a rectangular waveform of a voltage applied to the liquid crystal;

Figs. 2A and 2B are graphs showing a relationship between a transmittance of the apparatus shown in Figs. 1A to 1B and a voltage applied thereto, wherein Fig. 2A shows the relationship in a voltage range of 0 to 10 V and Fig. 2B shows the relationship in a voltage range of 0 to 20 V;

Fig. 3A and 3B are schematic views showing an operational principle of a light modulation apparatus using a negative type guest-host liquid crystal according to the present invention and Fig. 3C is a graph showing a rectangular waveform of a voltage applied to the liquid

crystal;

Figs. 4A and 4B are graphs showing a relationship between a transmittance of the apparatus shown in Figs. 3A to 3B and a voltage applied thereto, wherein Fig. 4A shows the relationship in a voltage range of 0 to 10 V and Fig. 4B shows the relationship in a voltage range of 0 to 20 V;

Figs. 5A to 5C are schematic views showing a parallel rubbing process, an anti-parallel rubbing process, and a one-side rubbing process for rubbing a liquid crystal device, respectively;

Figs. 6A to 6C are graphs each showing a relationship between a transmittance of the light modulation apparatus including the liquid crystal device shown in Figs. 3A to 3C, which device is rubbed by each of the parallel rubbing process, anti-parallel rubbing process, and one-side rubbing process, and a voltage applied to the liquid crystal device, respectively;

Fig. 7 is a graph showing a gap dependence on an initial transmittance of the light modulation apparatus including the liquid crystal device shown in Figs. 3A and 3B, which device is rubbed by the anti-parallel rubbing process;

Figs. 8A to 8D are graphs each showing a gap

dependence on a response speed of the light modulation apparatuses including the liquid crystal device shown in Figs. 3A and 3B, which device is rubbed by each of the anti-parallel rubbing process and one-side rubbing process;

Fig. 9 is a diagram showing four relationships each between a transmittance flicker and a waveform of a drive pulse including each of four kinds of pulse resting periods, which drive pulse is applied to the light modulation apparatus shown in Figs. 3A and 3B;

Fig. 10 is a graph showing a relationship between a transmittance of the light modulation apparatus shown in Figs. 3A and 3B and a pulse width of a drive pulse applied thereto, which drive pulse has each of pulse heights of 5 V and 10 V;

Fig. 11 is a diagram showing three kinds of modulated waveforms of drive pulses applied to the light modulation apparatus shown in Figs. 3A and 3B;

Fig. 12 is a graph illustrating a relaxation stage of a negative type liquid crystal of the light modulation apparatus shown in Figs. 3A and 3C;

Figs. 13A to 13C are graphs each showing a response characteristic of the light modulation apparatus using the negative type liquid crystal shown in Figs. 3A and

3B;

Fig. 14 is a graph showing a relationship between a transmittance of the light modulation apparatus shown in Figs. 3A and 3C and each drive pulse modulated in each of pulse width and pulse height;

Fig. 15 is a graph showing a relationship between a duty ratio and a transmittance of the light modulation apparatus shown in Figs. 3A and 3C to which each drive pulse modulated in each of pulse width and pulse density is applied;

Figs. 16A to 16D are diagrams showing waveforms of four kinds of drive pulses, whose pulse widths are differently modulated, to be applied to the light modulation apparatus shown in Figs. 3A and 3C, and Fig. 16E is a graph showing a relationship between an intensity of the transmittance and a pulse width of each drive pulse;

Fig. 17 is a graph showing an intensity of the transmittance of the light modulation apparatus shown in Figs. 3A to 3C and the number of positive and negative drive pulses applied thereto;

Figs. 18A to 18D are schematic views each showing an alignment stage of directors of light crystal molecules of the light modulation apparatus shown in Figs.

3A to 3C;

Fig. 19 is a diagram illustrating a defect in alignment of liquid crystal molecules depending on a relationship between a transmittance of the light modulation apparatus shown in Figs. 3A to 3C and a voltage applied thereto;

Fig. 20 is a graph showing comparative data on a change in transmittance of the light modulation apparatus shown in Figs. 3A to 3C depending on a voltage applied thereto;

Figs. 21A and 21B are graphs each showing a relationship between a transmittance of the light modulation apparatus shown in Figs. 3A to 3C and each drive pulse whose pulse height is modulated in two-steps, wherein a waveform of the drive pulse is shown on the lower side of the figure;

Fig. 22 is a graph showing a relationship between a transmittance of the light modulation apparatus shown in Figs. 3A to 3C and each drive pulse whose pulse height is modulated in two-steps, wherein a waveform of the drive pulse is shown on the lower side of the figure;

Fig. 23 is a diagram showing a waveform of each of various kinds of drive pulses applied to the light modulation apparatus shown in Figs. 3A to 3C;

Fig. 24 is a graph showing comparative data on a change in a transmittance of the light modulation apparatus shown in Figs. 3A to 3C and each drive pulse whose pulse height is modulated in a single step;

Fig. 25 is a graph showing a relationship between a transmittance of the light modulation apparatus shown in Figs. 3A to 3C and each drive pulse whose pulse width is modulated in two-steps, wherein a waveform of the drive pulse is shown on the lower side of the figure;

Fig. 26 is a graph showing a relationship between a transmittance at each of different temperatures of a light modulation apparatus shown in Figs. 3A to 3C and a pulse height of each drive pulse applied thereto;

Fig. 27 is a graph showing a relationship between pulse heights of drive pulses at different temperatures applied to the light modulation apparatus shown in Figs. 3A to 3C;

Fig. 28 is a graph showing a compensation difference between voltages at 65°C and 23.5°C applied to the light modulation apparatus shown in Figs. 3A to 3C for obtaining the same transmittance;

Fig. 29 is a graph showing a compensation difference between voltages at 65°C and 25°C applied to the light modulation apparatus shown in Figs. 3A to 3C

for obtaining the same transmittance;

Fig. 30 is a graph showing a relationship between a transmittance at each of different temperatures of the light modulation apparatus shown in Figs. 3A to 3C and a pulse height of each drive pulse applied thereto;

Fig. 31 is a graph showing a relationship between a transmittance at each of two temperatures of the light modulation apparatus shown in Figs. 3A to 3C and a pulse height of each drive pulse applied thereto;

Fig. 32 is a graph showing a relationship between pulse heights of drive pulses at different temperatures applied to the light modulation apparatus shown in Figs. 3A to 3C;

Fig. 33 is a schematic side view showing a configuration of a light modulation apparatus of the present invention;

Fig. 34 is a front view of a mechanical iris provided in the light modulation apparatus shown in Fig. 33;

Figs. 35A to 35C are schematic partial enlarged views illustrating an operation of the mechanical iris near an effective optical path of the light modulation apparatus shown in Fig. 33;

Fig. 36 is a schematic sectional view of a camera

system in which the light modulation apparatus shown in Fig. 33 is assembled;

Fig. 37 is a diagram showing an algorithm for controlling a transmittance of the camera system shown in Fig. 36; and

Fig. 38 is a block diagram of the camera system including a drive circuit shown in Fig. 36.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, preferred embodiments of a light modulation apparatus of the present invention will be described with reference to the accompanying drawings.

First Embodiment

Referring to Figs. 3A to 3C, there is shown a light modulation apparatus according to a first embodiment of the present invention, which apparatus includes a guest-host type liquid crystal cell (GH cell) 12 containing a host material 13 and a guest material 4, and a polarizing plate 11 disposed on the incident side of the GH cell 12.

A negative type liquid crystal having a negative dielectric constant anisotropy ($\Delta\epsilon$), produced by Merck under a trade name of MLC-6608, was used as the host material 13. A positive type dichroic dye having a positive light absorption anisotropy (ΔA), produced by

BDH under a trade name of D5, was used as the guest material 4.

With respect to the light modulation apparatus configured as described above, a change in transmittance (expressed in percentage based on the total quantity of light perfectly passing through the liquid crystal cell and the polarizing plate) of the light modulation apparatus was measured in air by applying an operational voltage having a rectangular waveform shown in Fig. 3C to the GH cell 12.

It should be noted that in this measurement, since the negative type liquid crystal is used as the host material 13, light passes through the GH cell 12 when no voltage is applied thereto, and light is absorbed in the GH cell 12 when a voltage is applied thereto.

As is apparent from the measured result shown in Figs. 4A and 4B, an average transmittance (in air) of visual light is steeply changed or reduced from the maximum transmittance (about 75%) to several % with an increase in applied voltage.

The reason why the transmittance of the light modulation apparatus of this embodiment is steeply, largely reduced with an increase in applied voltage may be considered as follows: namely, in the case of using

the negative type host material, since the interaction of liquid crystal molecules at the boundary between a liquid crystal alignment film of the liquid crystal cell and the liquid crystal molecules is very weak upon application of no voltage, light is easy to pass through the liquid crystal cell when no voltage is applied thereto, and directors (alignment vectors) of the liquid crystal molecules become easy to change when a voltage is applied thereto.

For comparison, a change in transmittance of a light modulation apparatus shown in Figs. 1A to 1C was measured in the same manner as that described above. As shown in Figs. 1A to 1C, the light modulation apparatus includes a guest-host type liquid crystal cell (GH cell) 2 containing a host material 3 and a guest material 4, and a polarizing plate 1 disposed on the incident side of the GH cell 2.

A positive type generalized liquid crystal having a positive dielectric constant anisotropy ($\Delta\epsilon$), produced by Merck under a trade name of MLC-6849, was used as the host material 3, and the same positive type dichroic dye D5 (trade name, produced by BDH) as that used in the first embodiment was used as the guest material 4.

With respect to the light modulation apparatus

configured as described above, a change in transmittance of the light modulation apparatus was measured by applying an operational voltage having a rectangular waveform shown in Fig. 1C to the GH cell 2.

It should be noted that in this measurement, since the positive type liquid crystal is used as the host material 3, light is absorbed in the GH cell 2 when no voltage is applied thereto, and light passes through the GH cell 2 when a voltage is applied thereto.

As is apparent from the measured result shown in Figs. 2A and 2B, an average transmittance of visual light is slowly changed or increased with an increase in applied voltage, and reaches the maximum transmittance (about 60%) when a voltage of 20 V is applied to the liquid crystal cell 2.

The reason why the transmittance of the light modulation apparatus of this comparative example is slowly changed with an increase in applied voltage and the maximum transmittance thereof is relatively small may be considered as follows: namely, in the case of using the positive type host material, since the interaction of liquid crystal molecules at the boundary between a liquid crystal alignment film of the liquid crystal cell and the liquid crystal molecules is strong upon application of no

voltage, there may remain those of liquid crystal molecules, whose directors do not change or not easy to change, even when a voltage is applied thereto.

As described above, the light modulation apparatus including GH cell 12 using the negative type host material according to the first embodiment is advantageous in that since the maximum transmittance can be increased up to about 75%, the apparatus can be designed to be operable in a high transmittance region, and since the transmittance can be steeply changed, the apparatus can easily control the transmittance by an operational voltage.






The combination of the host material and guest material constituting the GH cell 12 can be variously changed, the examples of which may include a combination of a negative host material ($\Delta\epsilon < 0$) and a positive type guest material ($\Delta A > 0$); a combination of a negative host material ($\Delta\epsilon < 0$) and a negative type guest material ($\Delta A < 0$); a combination of a positive type host material ($\Delta\epsilon > 0$) and a positive type guest material ($\Delta A > 0$); and a combination of a positive type host material ($\Delta\epsilon > 0$) and a negative type guest material ($\Delta A < 0$).

Although in the GH cell 12, a drive electrode, typically an ITO (Indium Tin Oxide: Indium Oxide doped

with Tin) electrode is provided in solid on a substrate surface, it may be divided to be used in a segment mode or a matrix mode.

Examples of negative host materials ($\Delta \epsilon < 0$) usable for the light modulation apparatus according to the present invention may include compounds having the following molecular structures:









[Example 1]

Molecular structure	$\Delta \epsilon$	C	N	I
	-4.0	•45	•101	•
	-4.2	•56	•113	•
	-22	•85.8	SA (•52.0)	•
	-18	•133.5	•143.5	•
	-8	•24	66	•













[Example 2]

<Other basic skeletons>













R, R¹, R², and L express normal chain or branched alkyl group, alkoxy group, alkenyl group, fluoroalkoxy group, fluoroalkenyl group, -CN group, etc.

















[Example 3]















[Example 4]




[Example 5]



[Example 6]



[Example 7]

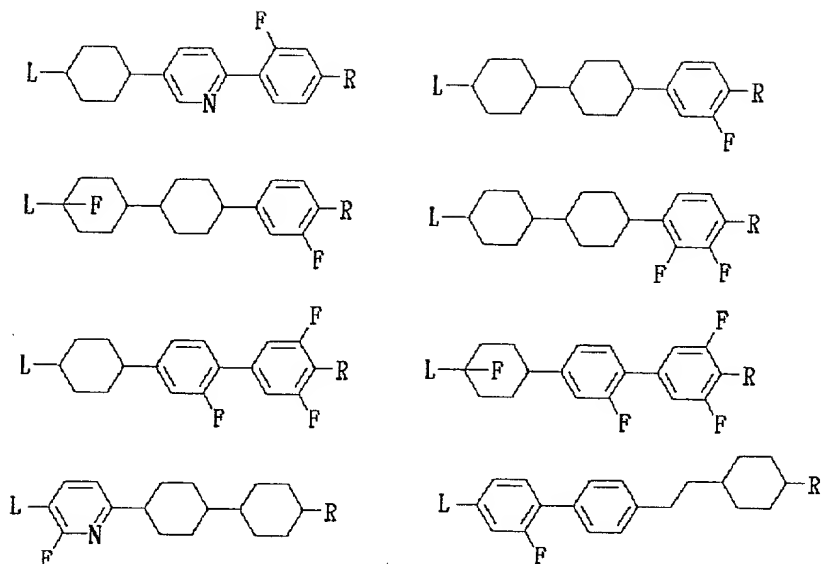

Examples of negative host materials usable for the light modulation apparatus according to the present invention may include the following commercially available compounds:

[Example 1]

MLC-6608 (produced by Merck)

S-N shift		<-30.0 degree	
Cleaning temperature		+90.0°C	
Rotational viscosity ν_1	20°C	186.0	mPa·s
Optical anisotropy	Δn	0.0830	
+20°C, 589.3nm	n_e	1.5586	
	n_o	1.4756	
Dielectric anisotropy	$\Delta \epsilon$	-4.2	
+20°C, 1.0kHz	ϵ_{\perp}	7.8	
	$\epsilon_{//}$	3.6	
Elastic constant	K_{11}	16.7	pN
+20°C	K_{33}	18.1	pN
	K_{33}/K_{11}	1.08	
Stability at low temperature	-30°C	1000	hcr

[Example 2]

MLC-2039 (produced by Merck)

Cleaning temperature		+91.0°C	
Rotational viscosity ν_1	20°C	163.0	mPa·s
Optical anisotropy	Δn	0.0821	
+20°C, 589.3nm	n_e	1.5575	
	n_o	1.4754	
Dielectric anisotropy	$\Delta \epsilon$	-4.1	
+20°C, 1.0kHz	ϵ_{\perp}	7.6	
	$\epsilon_{//}$	3.5	

[Example 3]

MLC-2038 (produced by Merck)

Cleaning temperature	+80.0°C		
Flow viscosity ν	20°C	29	mm ² s ⁻¹
	0°C	128	mm ² s ⁻¹
	-20°C	1152	mm ² s ⁻¹
	-30°C	6369	mm ² s ⁻¹
Rotational viscosity ν_1	20°C	179.0	mPa·s
Optical anisotropy	Δn	0.1032	
	+20°C, 589.3nm	n_e	1.5848
		n_o	1.4816
Dielectric anisotropy	$\Delta \epsilon$	-5.0	
	+20°C, 1.0kHz	ϵ_{\perp}	9.0
		ϵ_{\parallel}	4.0
Elastic constant	K_{11}	13.8	pN
	K_{33}	18.1	pN
	K_{33}/K_{11}	1.31	
Stability at low temperature	-30°C	48	h cr
	-20°C	432	h cr

[Example 4]










MLC-2037 (produced by Merck)

S-N shift	<-20.0°C		
Cleaning temperature	+71.0°C		
Rotational viscosity ν_1	20°C	132.0	mPa·s
Optical anisotropy	Δn	0.0649	
	+20°C, 589.3nm	n_e	1.5371
		n_o	1.4722
Dielectric anisotropy	$\Delta \epsilon$	-3.1	
	+20°C, 1.0kHz	ϵ_{\perp}	6.7
		ϵ_{\parallel}	3.6
Stability at low temperature	-20°C	1000	h cr

The above compounds may be used singularly or in combination to exhibit the pneumatic property in a real service temperature range.

Examples of dichroic dye molecular materials usable for the light modulation apparatus of the present invention may include compounds having the following molecular structures:

[Example 1]

	molecular structure	λ_m (nm)	color	degree of dichroism
D5		590	B	5.3
D35		553	P	6.5
L-dye B		641	B	9.2
G209		687	B	9.5
G168		574	B	10.6
G165		595	B	10.3
G224		574	V	9.7
G205		507	R	11.4
G232		450	Y	12.1

B: blue, P: purple, V: violet, R: red, Y: yellow

D5, D35: produced by BDH

L-dye B: produced by Roche

Others: produced by Japan Photosensitive Pigment Laboratory

[Example 2]

pigment structure	λ_{\max} (nm) S	
	(in liquid crystal)(value at λ_{\max})	
	450	0.79
	440	0.78
	542	0.75
	548	0.78
	573	0.77
	610	0.83
	464	0.80
	520	0.77
		0.76

[Example 3]

pigment structure (in liquid crystal)	λ_{\max} (nm) S	
	(value at λ_{\max})	
	638	0.78
	638	0.77
	627	0.76
	640	0.77
	668	0.74
	565	-0.377
	548	-0.33

Second Embodiment

In this embodiment, a response speed of a light modulation apparatus upon application of a voltage thereto was examined.

The response speed of a light modulation apparatus upon application of a voltage thereto varies depending on not only the kind of drive of the apparatus but also means used for producing a liquid crystal device, for example, a rubbing process. The rubbing process involves forming a film made from a high polymer such as polyimide or polyvinyl alcohol on a substrate, and rubbing the film with cloth, thereby uniformly aligning liquid crystal molecules in the rubbing direction [D. W. Berrenan, Mol. Cryst. & Liq. Cryst., 23.215(1973)].

Examples of the rubbing processes include a parallel rubbing process, an anti-parallel rubbing process, and a one-side rubbing process. The parallel rubbing process shown in Fig. 5A involves rubbing both alignment films formed on upper and lower substrates in such a manner that the rubbing direction on the upper alignment film is parallel to that on the lower alignment film. The anti-parallel rubbing process shown in Fig. 5B involves rubbing both alignment films formed on upper and lower substrates in such a manner that the rubbing

direction on the upper alignment film is anti-parallel to that on the lower alignment film. The one-side rubbing process shown in Fig. 5C involves rubbing only an alignment film formed on one of upper and lower substrates.

Since alignment of liquid crystal molecules largely differs depending on a material of an alignment film and a film formation condition of the alignment film, it is required to select an alignment film material suitable for a liquid crystal material and to examine a film formation condition and a rubbing condition suitable for the liquid crystal material. In this regard, according to the present invention, it is possible to determine conditions, particularly, a rubbing process condition suitable for a liquid crystal composition used for a light modulation apparatus.

At first, a change in transmittance depending on a voltage applied to a light modulation apparatus including a liquid crystal device rubbed by the parallel rubbing process was examined as follows:

A light modulation apparatus having the same basic configuration as that shown in Figs. 3A to 3C, that is, including a GH cell 12 containing a host material 13 and a guest material 4 and a polarizing plate 11 disposed on

the incident side of the GH cell 12, was prepared. In this example, a negative type generalized liquid crystal having a negative dielectric constant anisotropy ($\Delta\epsilon$), produced by Merck Incorporation under a trade name of MLC-2039, was used as the host material 13; the same positive type dichroic dye as that used in the first embodiment, produced by BDH Incorporation under the trade name of D5, was used as the guest material 4; and the GH 12 was rubbed by the parallel rubbing process shown in Fig. 5A. With respect to each of three samples of the light modulation apparatuses thus prepared, a change in transmittance of the sample was measured by applying an operational voltage having a rectangular waveform shown in Fig. 3C to the GH cell 12.

From the result shown in Fig. 6A, it becomes apparent that the transmittance is not dependent on the operational voltage, and is not reduced to a specific value. This means that the parallel rubbing process is unsuitable for alignment of the negative type liquid crystal molecules.

At second, a change in transmittance depending on a voltage applied to a light modulation apparatus including a liquid crystal device rubbed by the anti-parallel rubbing process was examined as follows:

A light modulation apparatus having the same basic configuration as that shown in Figs. 3A to 3C, that is, including a GH cell 12 containing a host material 13 and a guest material 4 and a polarizing plate 11 disposed on the incident side of the GH cell 12, was prepared. In this example, the same negative type liquid crystal as that used in the first embodiment, produced by Merck Incorporation under the trade name of MLC-6608, was used as the host material 13; the same positive type dichroic dye as that used in the first embodiment, produced by BDH Incorporation under the trade name of D5, was used as the guest material 4; and the GH 12 was rubbed by the anti-parallel rubbing process shown in Fig. 5B. With respect to each of three samples of the light modulation apparatuses thus prepared, a change in transmittance of the sample was measured by applying an operational voltage having a rectangular waveform shown in Fig. 3C to the GH cell 12.

From the result shown in Fig. 6B, it becomes apparent that an average transmittance (in air) of visual light is steeply changed or reduced from a maximum transmittance (75%) to several % with an increase in operational voltage.

In this way, the transmittance of the GH cell

rubbed by the anti-parallel rubbing process exhibits a high voltage dependence, that is, it can be controlled on the basis of a voltage applied to the GH cell, and further, the range of the transmittance controllable by a voltage is enlarged. In addition, the reason why the transmittance is steeply reduced with an increase in operational voltage and the maximum transmittance is high in Fig. 6B may be considered as follows: namely, in the case of using the negative type host material, since the interaction of liquid crystal molecules at the boundary between a liquid crystal alignment film of the liquid crystal cell and the liquid crystal molecules is very weak upon application of no voltage, light is easy to pass through the liquid crystal cell when no voltage is applied thereto, and directors of the liquid crystal molecules become easy to change when a voltage is applied thereto.

At third, a change in transmittance depending on a voltage applied to a light modulation apparatus including a liquid crystal device rubbed by the one-side rubbing process was examined as follows:

A light modulation apparatus having the same basic configuration as that shown in Figs. 3A to 3C, that is, including a GH cell 12 containing a host material 13 and

a guest material 4 and a polarizing plate 11 disposed on the incident side of the GH cell 12, was prepared. In this example, the same negative type liquid crystal as that used in the first embodiment, produced by Merck Incorporation under the trade name of MLC-6608, was used as the host material 13; the same positive type dichroic dye as that used in the first embodiment, produced by BDH Incorporation under the trade name of D5, was used as the guest material 4; and the GH 12 was rubbed by the one-side rubbing process shown in Fig. 5C. With respect to each of three samples of the light modulation apparatuses thus prepared, a change in transmittance of the sample was measured by applying an operational voltage having a rectangular waveform shown in Fig. 3C to the GH cell 12.

From the result shown in Fig. 6C, it becomes apparent that an average transmittance (in air) of visual light is steeply changed or reduced from a maximum transmittance (about 75%) to several % with an increase in operational voltage.

In this way, the transmittance of the GH cell rubbed by the anti-parallel rubbing process exhibits a high voltage dependence, that is, it can be controlled on the basis of a voltage applied to the GH cell. In addition, the reason why the transmittance is steeply

reduced with an increase in operational voltage and the maximum transmittance is high in Fig. 6C may be considered as follows: namely, in the case of using the negative type host material, since the interaction of liquid crystal molecules at the boundary between a liquid crystal alignment film of the liquid crystal cell and the liquid crystal molecules is very weak upon application of no voltage, light is easy to pass through the liquid crystal cell when no voltage is applied thereto, and directors of the liquid crystal molecules become easy to change when a voltage is applied thereto.

Next, a factor typically a pre-tilt angle for determining an initial transmittance (upon application of no voltage) of the GH cell rubbed by the one-side rubbing process was examined.

Fig. 7 is a graph showing a pre-tilt angle dependence on an initial transmittance (upon the off state of voltage) of the light modulation apparatus shown in Figs. 3A to 3C. The pre-tilt angle is defined as an angle at which liquid crystal molecules are tilted along the tilt direction of main chains of a film made from a high polymer such as polyimide or polyvinyl alcohol at the rubbing step. The pre-tilt angle, therefore, has a strong relation with the rubbing process.

From the result shown in Fig. 7, it becomes apparent that when a design cell gap is 6 μm or more, the initial transmittance is not dependent on the pre-tilt angle. In other words, if the cell gap of the liquid crystal device of the light modulation apparatus is in a range of 5 μm or less, the transmittance can be adjusted by the alignment process.

In the case of using the GH cell rubbed by the anti-parallel process, a result similar to that shown in Fig. 7 was obtained.

An effect of the anti-parallel rubbing process exerted on a response speed was compared with that of the one-side rubbing process exerted on the response speed, as follows: namely, a relationship between a response speed of the light modulation apparatus including the liquid crystal device rubbed by each of the anti-parallel rubbing process and the one-side rubbing process controllable by a voltage and a cell gap was examined by applying a voltage to the liquid crystal device in each of a large-scale drive mode (drive wave form: 0-5 V at 1 kHz) and an intermediate-scale drive mode (drive waveform: 2-3 V at 1 kHz) at each of 22°C and 65°C. The results are shown in Figs. 8A to 8D. In these figures, for easy comparison, the response speed is expressed in

an absorbance changed per unit response time.

From the results shown in Figs. 8A and 8B, it becomes apparent that the gap dependence on the response speed in the intermediate-scale drive mode (2-3 V) does not appear in the low temperature environment, 22°C (see Fig. 8A) while the gap dependence on the response speed in the large-scale drive mode (0-5 V) appears at 22°C (see Fig. 8B); and the response speed of the apparatus including the cell rubbed by the anti-parallel rubbing process is higher than that of the apparatus including the cell rubbed by the one-side rubbing process at 22°C, irrespective of the presence or absence of the gap dependence.

From the results shown in Figs. 8C and 8D, it becomes apparent that the gap dependence on the response speed appears in each of the intermediate-scale drive mode (2-3 V) and the large-scale drive mode (0-5 V) in the high temperature environment, 65°C; and the response speed of the apparatus including the cell rubbed by the anti-parallel rubbing process is higher than that of the apparatus including the cell rubbed by the one-side rubbing process in the intermediate-scale drive mode at 65°C while the response speed of the apparatus in the large-scale drive mode (0-5 V) at 65°C is not dependent on

the kind of rubbing process.

In this way, the response speed of the light modulation apparatus including the liquid crystal device rubbed at a pre-tilt angle, exerting an effect on the initial transmittance, in the range of 5 μm or less by the anti-parallel rubbing process can be made higher than that of the apparatus including the liquid crystal device rubbed at the same pre-tilt angle by the one-side rubbing process. The reason for this may be considered that in the liquid crystal device rubbed by the anti-parallel rubbing process, directors of aligned liquid crystal molecules are easy to change by an electric field applied thereto.

Third Embodiment

In this embodiment, the control of a transmittance of a light modulation apparatus by modulating a pulse width or a pulse density of drive pulses applied to a GH cell of the apparatus was examined.

In particular, the modulation of a pulse width of each drive pulse for controlling a transmittance of the light modulation apparatus is effective to independently perform the control of the transmittance and the compensation of the transmittance. Specifically, the transmittance is normally controlled by modulating the

pulse width of each drive pulse on the basis of a normal feedback control signal and the transmittance is compensated by modulating the pulse height of the drive pulse on the basis of a temperature correction feedback signal, or the transmittance is normally controlled by modulating the pulse height of each drive pulse on the basis of a normal feedback control signal and the transmittance is compensated by modulating the pulse width of the drive pulse on the basis of a temperature correction feedback signal.

(1) Basic Rectangular Waveform of Drive Pulse and Flicker of Light Modulation Apparatus

The waveform of a voltage to be applied to the GH 12 is a rectangular waveform as shown in Fig. 3C; however, it may be a trapezoidal waveform or sine waveform. When each drive pulse shown in Fig. 3C is applied to a liquid crystal device, directors of liquid crystal molecules are changed depending on a differential potential between both electrodes, to thereby control the transmittance of light. Accordingly, the transmittance is generally controlled on the basis of a pulse height (or pulse voltage) of the drive pulse.

The control of such a pulse height of each drive pulse, however, must be basically subjected to D/A

conversion, and further, it is difficult to highly accurately control the pulse height, with a result that the control of the pulse height causes a problem in increasing the circuit cost.

By the way, an electro-optical response of a nematic liquid crystal material is as slow as several ms at minimum and several hundreds ms at maximum. From this viewpoint, the present inventor has examined a suitable basic pulse generation period of drive pulses for stably controlling the transmittance of a material having such a response characteristic by adopting the mode of modulating the pulse width of each drive pulse applied thereto.

A test for determining the basic pulse generation period was performed by applying drive pulses to a liquid crystal device of a light modulation apparatus in the order of $0\text{ V} \rightarrow 5\text{ V} \rightarrow 0\text{ V} \rightarrow -5\text{ V} \rightarrow 0\text{ V} \cdots$ as shown in Fig. 9, and a variation in transmittance of the apparatus was observed by changing the width of each pulse, particularly, the width of each resting pulse (0 V).

As is apparent from the results shown in Fig. 9, a flicker of transmittance appears, that is, the transmittance is unstable when the resting pulse period is $300\text{ }\mu\text{s}$ or more, and any flicker of transmittance does

not appear when the resting pulse period is 200 μ s or less.

Accordingly, the pulse width of each pulse applied to the liquid crystal device of the light modulation apparatus should be modulated in such a manner that the resting pulse period does not exceed about 200 μ s. Since the response speed of a liquid crystal is dependent on the kind of the liquid crystal and an environmental temperature, the resting pulse period must be set at such a value as not to cause a flicker of transmittance under service conditions. Further, to obtain stable optical characteristics of a liquid crystal device, it is effective to control the pulse width of each drive pulse on the basis of an environmental temperature feedback signal.

(2) Modulation of Pulse Width

As the result of the above-described examination, the basic pulse generation period was set at 100 μ s, and the pulse width (PW) was modulated within this basic pulse generation period. Fig. 10 shows a change in transmittance of the light modulation apparatus depending on a pulse width PW of each drive pulse applied to the liquid crystal device of the apparatus with a pulse height of the drive pulse set at a constant value, for

example, each of 5 V and 10 V. In addition, the transmittance is expressed in percentage based on the total quantity of light passing through the liquid crystal cell and the polarizing plate upon application of no voltage applied to the liquid crystal device.

As is apparent from Fig. 10, the transmittance can be easily controlled by modulating the pulse width of each drive pulse within the pulse generation period of 100 μ s under the condition that the pulse height of the drive pulse is set at each of 5 V and 10V. This is because directors of liquid crystal molecules are changed by an electric field energy corresponding to the pulse width of each drive pulse, and thereby the alignment of the liquid crystal molecules is controlled. From the result shown in Fig. 10, it is also found that the transmittance can be freely controlled by the combination of the pulse height and the pulse width of each drive pulse. This means that the limitation of gradation due to the limitation of minimum clock can be eliminated, that is, the resolution of the gradation control can be increased by controlling a pulse height in digital as a lower bit and simultaneously modulating the pulse width as an upper bit, or by controlling a pulse width in digital as a lower bit and simultaneously modulating the

pulse height as an upper bit. The modulation of the pulse width of each drive pulse has a further merit in terms of cost because the pulse width of the basic waveform of the drive pulse can be modulated in synchronization of a clock generated by a peripheral circuit of an apparatus including the light modulation device.

Figs. 11A and 11B show two waveforms of each drive pulse modulated in pulse width. In the waveform shown in Fig. 11A, the pulse is applied at the start of the basic pulse generation period, and in the waveform shown in Fig. 11B, the pulse is applied after an elapse of a specific delay time since the start of the basic pulse generation period. The effect of the drive pulse having the waveform in Fig. 11A is the same as that of the drive pulse having the waveform in Fig. 11B. With respect to the waveform in Fig. 11B, the pulse may be applied after an elapse of the delay time since each basic pulse generation period. Further, the waveform in Fig. 11B may be combined with the waveform in Fig. 11A. In addition, a necessary number of drive pulses may be applied within the basic pulse generation period. Fig. 11C also shows the modulation of the pulse density, in which the numerical density of pulses within the basic pulse generation period is modulated.

Fig. 12 shows a relaxation stage of a negative type liquid crystal used as a host material, for example, of the GH cell shown in Figs. 3A to 3C.

The relaxation stage of a negative type liquid crystal system is expressed by the following equations:

$$R = R_1 [1 - \exp (-T/\tau_1)] + R_2 [1 - \exp -(T/\tau_2)^2]$$

$$\text{Basic Period} \leq - (\text{Relaxation Time}) \times \ln (0.98)$$

$$T = -\tau \times \ln [1 - 2/100]$$

Relaxation Stage at Relaxation Time τ_1

$$\rightarrow T = 300 \text{ to } 400 \mu s$$

The values R_1 , τ_1 , R_2 , and τ_2 are shown in Fig. 12, for example, $R_1 = 78\%$, $\tau_1 = 15.8 \text{ ms}$, $R_2 = 22\%$, and $\tau_2 = 17.6 \text{ ms}$ at the relaxation state of $3 \text{ V} \rightarrow 0 \text{ V}$.

From the result shown in Fig. 12, it becomes apparent that the relaxation time after a pulse voltage is applied and then turn off is changed depending on the pulse height, and more specifically, the relaxation time becomes longer as the pulse height becomes higher.

Fig. 13A shows the intensity of the transmission light of the light modulation apparatus in a relaxation stage similar to that shown in Fig. 12, and Fig. 13B and 13C each show a variation in intensity of the transmission light of the light modulation apparatus in the relaxation stage. From the data on the variation in

intensity of the transmission light in a region of 0 to 5 ms in which relaxation is linearly generated (Fig. 13B), it becomes apparent that the off time of 300 μ s or less is required to specify the variation in a range of 1% or less, and the off time of 420 μ s or less is required to specify a variation in a range of 2% or less.

The above off time corresponds to the resting pulse period for eliminating a flicker of transmittance shown in Fig. 9, so that the basic pulse generation period can be set at, for example, 100 μ s under the condition that a variation in intensity of the transmission light in the range of 2% or less is allowable.

The variation in intensity of the transmission light in the range of 2% or less is set on the basis of the image pickup specification of the existing CCD (which will be described later).

In the image pickup of the CCD, even if there occurs a variation in intensity of the transmission light in the range of more than 2%, it is estimated that flicker little appears upon usual operation of the CCD because the image pickup of the CCD is based on an average of light quantity accumulated in a field period; however, the dynamic range of the transmittance control is degraded, and if a shutter is used, the open time of

the shutter is not proportional to the light quantity, to cause a problem in terms of control. As a result, in the image pickup of the CCD, it may be desirable to specify the variation in intensity of transmission light in the range of 2% or less.

If the basic pulse generation period exceeds the field period of the CCD, a flicker may appear upon usual operation of the CCD. Accordingly, to carry out the modulation of the pulse width of each drive pulse, it is essential to set the basic pulse generation period within the field period of the CCD.

(3) Comparison Between Modulation of Pulse Width and Modulation of Pulse Height

Fig. 14 shows a graph for comparing the characteristic of a conventional pulse height modulation (PHM) mode and the characteristic of a pulse width modulation (PWM) mode. In this graph, the abscissa indicates an average per unit time of absolute values of differential potentials applied between electrodes, which is taken as an equivalent voltage.

As is apparent from Fig. 14, as compared with the curve indicating the PHM mode, the curve indicating the PWM mode is lower in threshold voltage and is shifted on the lower voltage side as a whole. As a result, according

to the PWM mode, the transmittance can be controlled by a lower voltage, to reduce the power consumption, and since the transmittance is relatively moderately changed depending on a voltage, it is easy to be controlled by the voltage, to improve the gradation.

In this way, the pulse width modulation (PWM) mode has the following advantages:

- (1) to reduce a threshold voltage;
- (2) to increase the number of gradation of the transmittance level, and highly accurately control a transmittance; and
- (3) reduce a circuit cost because of no D/A conversion.

(4) Modulation of Pulse Width and Modulation of Pulse Density

A pulse density modulation (PDM) mode used in place of modulation of a pulse height of each drive pulse was compared with the above-described PWM mode. In the PDM mode, the number of pulses generated per unit time is modulated, and in general, the pulses, each having a very short width, are frequently generated per unit time.

As shown in Fig. 15, the drive characteristic of the PWM mode is very similar to that of the PDM mode; however, the PWM mode is superior in power consumption to

the PDM mode because the PWM mode is smaller than the PDM mode in terms of the amount of a current charged in a liquid crystal cell per unit time. The PWM mode is also superior to the PDM mode in terms of impedance matching.

(5) Effect of Pulse Number

In the case of controlling a transmittance of a light modulation apparatus in the pulse width modulation mode, it is possible to eliminate the deviation of polarization of ions or the like in the light modulation apparatus by driving the apparatus in such a manner that an average per unit time of differential potentials (DC components) applied between electrodes of a liquid crystal device of the apparatus becomes nearly zero, and hence to highly accurately control the transmittance of the apparatus.

For example, when two positive pulses and two negative pulses are, as shown in Fig. 16B, alternately applied to a basic drive waveform of Fig. 16A, if an average per unit time of the number of the positive pulses is equal to that of the number of the negative pulses, it is possible to usually obtain the same drive characteristic of the transmittance.

As shown in Fig. 16C, the relationship between a transmittance and a pulse width is not changed

irrespective of the number ($m = 1, 2, \dots$) of positive pulses and the number ($m = 1, 2, \dots$) of negative pulses insofar as the number ($m = 1, 2, \dots$) of the positive pulses is equal to the number ($m = 1, 2, \dots$) of the negative pulses.

As shown in Fig. 16D, the relationship between a transmittance and a pulse width is not changed irrespective of the generation order of pulses insofar as the number of the positive pulses is equal to that of the negative pulses. Further, it can be easily estimated that the relationship between a transmittance and a pulse width is not changed even if pulse widths are individually modulated, insofar as an average per unit time of the pulse widths is specified.

On the contrary, if the number of positive pulses is different from that of negative pulses, the relationship between a transmittance and a pulse width is changed. Now, it is assumed that the number of negative pulses is as large as k times the number of the positive pulses. If $k = 1$, the drive pulses (positive and negative pulses) are symmetrically applied with respect to 0 V, and in this case, the relationship between a transmittance and a pulse width is not changed. On the other hand, if the value of k becomes larger than 1, the

drive pulses (positive and negative pulses) are asymmetrically applied with respect to 0 V, and in this case, the relationship between a transmittance and a pulse width is changed, and more specifically, as shown in Fig. 17, the transmittance becomes larger than a specific transmittance, thereby degrading the controllability of the transmittance. That is to say, the transmittance is varied not depending on the value "m" but depending on the value "k".

If the polarities of asymmetric pulses are instantly reversed, the transmittance is temporarily reduced and is returned to the original transmittance after several seconds. Such a transient variation in the order of seconds, observed as a flicker with a long period, may be considered to occur due to a deviation of movable ions in a liquid crystal cell, which deviation may be caused by an average per unit time of bias voltages.

As described above, to stably control the transmittance, it may be desirable to symmetrically apply the drive pulses (positive and negative pulses) with respect to 0 V, that is, to make the number of the positive pulses equal to that of the negative pulses.

Fourth Embodiment

In this embodiment, the control of a transmittance of a light modulation apparatus by modulating stepwise the pulse width of each drive pulse applied to a liquid crystal device of the apparatus was examined.

Rubbing Effect and Defect in Alignment

A test for examining the rubbing effect and a defect in alignment of liquid crystal molecules was performed by using a light modulation apparatus including a liquid crystal cell shown in Figs. 3A to 3C. The cell was produced by making glass substrates, each having a transparent electrode on the upper surface of which a liquid crystal alignment layer was provided, face to each other with a specific gap put therebetween and filling the gap with a guest-host liquid crystal in a reduced pressure. Each drive pulse having an AC rectangular waveform shown in Fig. 3C was applied to the cell of the apparatus, and a defect in alignment of liquid crystal molecules was observed.

If the liquid crystal alignment layer (not shown) is not subjected to rubbing treatment, as shown in Fig. 18A, when a voltage is applied to the cell, light crystal molecules are tilted with respect to the substrate plane and simultaneously, liquid crystal molecules and pigment molecules in a plane parallel to the glass substrate

plane were disturbed, with a result that non-uniformity of the transmittance occurs in the substrate plane. To solve such a problem, as a known technique, the tilting direction of the liquid crystal molecules is previously specified by rubbing the liquid crystal alignment layer as shown in Fig. 18B, to uniformly tilt the liquid crystal molecules, thereby improving the in-plane uniformity of the liquid crystal molecules.

However, if a large drive voltage is applied with a single step to the liquid crystal device rubbed as described above, there occurs a transient state in which liquid crystal molecules are aligned in different directions, and if such a transient state continues for a time being long enough to exert an effect on the transmittance, there appears in-plane non-uniformity in transmittance. In general, the transient state disappears after an elapse of a certain time required for re-alignment of liquid crystal molecules and pigment molecules; however, in the worst case, the transient state may partially remain even after an elapse of a long time.

To solve such a problem, as shown in Fig. 18D, a preparation voltage being low enough not to cause a defect in alignment of liquid crystal molecules is

applied to the liquid crystal device to tilt the liquid crystal molecules to some extent, and then a final voltage being high enough to achieve a desired transmittance is applied to the liquid crystal device, to control the transmittance in an in-plane uniform state.

Transmittance and Defect in Alignment in One-step Drive Mode (1)

As shown in Fig. 19, in the case of applying a voltage (based on 0 V) with a single step for achieving the transmittance of 15% or less by each of the pulse width modulation (PWM) or pulse height modulation (PHM) mode, there occur defects in alignment of liquid crystal molecules and pigment molecules as described with reference to Fig. 18C. It should be noted that, in the case of applying a voltage with a single step for achieve the transmittance of 15% or more by each of the PWM or PHM mode, there do not occur defects in alignment of liquid crystal molecules and pigment molecules.

Fig. 20 shows a change in transmittance of a light modulation apparatus and a frequency of defects of alignment depending on a pulse voltage applied to a liquid crystal device of the apparatus in each of the PWM mode and PHM mode. As is apparent from this graph, the change in transmittance and the frequency of defects of

alignment are dependent on the pulse voltage, and in particular, as the pulse voltage is increased up to 5 V or more (that is, the transmittance becomes 15% or less), the defect in alignment of liquid crystal molecules is liable to occur.

Change in Transmittance in Two-step Drive Mode (1)

A method of driving a liquid crystal device by modulating the pulse height of each AC pulse with two-steps according to the present invention will be described.

In an example shown in Fig. 21A, a two-step drive mode in which a preparation voltage of 4 V was first applied for 90 ms and then a final voltage of 10 V was applied is performed in place of a single step drive mode of 0 V \rightarrow 10 V. With this two-step drive mode, the unstable change in transmittance as shown in Fig. 20 does not appear and instead a stable change in transmittance appears. In an example shown in Fig. 21B, a two-step drive mode, in which a preparation voltage of 4 V was first applied for 15 ms and then a final voltage of 10 V was applied, is performed. Even in this example, the change in transmittance is stabilized. As described in the above examples, the pulse time width at each step can be freely selected. In addition, the two-step drive mode

shown in Fig. 21B may be suitable for quick response.

Fig. 22 shows a drive waveform similar to that shown in Fig. 21B in detail. In the two-step drive mode shown in this graph, at the first step, positive and negative pulses (pulse height: 4.5 V, pulse width: 500 μ s) are alternately repeated by 15 times, and at the second step, positive and negative pulses (pulse height: 10 V, pulse width: 500 μ s) are alternately repeated by 75 times. As a result, it becomes apparent that if the positive and negative pulses (pulse height: 4.5 V, pulse width: 500 μ s) are previously applied to the liquid crystal device for 15 ms or more, there does not occur a defect in alignment even if a drive pulse (pulse height: 5 V or more) is then applied to the liquid crystal device.

In this way, as the drive of the light modulation apparatus by applying two-step pulses in accordance with the present invention, it is possible to obtain the change in transmittance having a desired profile, to improve the control accuracy of the transmittance, and to enhance the in-plane uniformity of the transmittance of the apparatus.

In this two-step drive mode, the pulse width and pulse height of a preparation pulse can be freely specified, and each of patterns shown in Figs. 23A to 23E

can be selected as the combination of preparation and final pulses. The drive pulse may be modulated in multi-steps more than two-steps in accordance with the need of the light modulation apparatus, and further a method of modulating only the pulse width with the pulse height kept constant, for example, pulse width modulation mode, can be applied as will be described later.

Transmittance and Defect in Alignment in One-step Drive Mode (2)

In the case of achieving the transmittance of 15% or less by applying a drive pulse modulated in pulse width with a pulse height is kept constant, as described with reference to Fig. 18C, the change in transmittance is changed depending on the pulse height of the drive pulse. As shown in Fig. 24A, if the pulse height is set at 5 V, there does not occur an unstable change in transmittance due to a defect in alignment, and as shown in Fig. 24B, if the pulse height is set at 10 V, an unstable change (abnormal response) in transmittance due to a defect in alignment is liable to occur.

Change in Transmittance in Two-step Drive Mode (2)

To prevent the occurrence of a defect in alignment of liquid crystal molecules, in particular, in the case where the pulse height of each drive pulse applied to the

liquid crystal device is high, according to the present invention, a pulse width of the above drive pulse is modulated with two-steps. For example, in the case of applying a drive pulse whose pulse height of 10 V (based on 0 V), as shown in Fig. 25, positive and negative preparation pulses (pulse height: 10 V, pulse width: 20 μ s) are applied for 15 ms, and then positive and negative pulses (pulse height: 10 V, pulse width: 100 μ s) are applied. In this case, as shown in Fig. 25, the change in transmittance becomes stable. The combination of pulses different in pulse width is not limited to that described above. The pulse width of each drive pulse may be modulated in two or more steps, and the pulse height of the drive pulse may be variously changed.

Fifth Embodiment

In this embodiment, a temperature dependence on a transmittance-applied voltage characteristic of a light modulation apparatus was examined.

Temperature Dependence on Transmittance-applied Voltage Characteristic of negative Type Liquid Crystal Device

A GH liquid crystal device 12 using a negative type nematic liquid crystal, disposed at each of environmental temperatures (23.5°C, 40°C, 55°C, and 65°C), was driven by applying a drive voltage having an AC waveform (1 kHz)

shown in Fig. 3C thereto, and a transmittance-applied voltage characteristic (V-T characteristic) of the GH liquid crystal device 12 was measured. The results are shown in Fig. 26. At 23.5°C, the transmittance of the device is as bright as about 80% in a range of 0 to 1.5 V, being reduced with an increase in applied voltage in a range of 2 V or more, and is gradually saturated in a range of 5 V or more.

Such a V-T characteristic has a temperature dependence shown in Fig. 26, in which the transmittance is decreased with an increase in environmental temperature in a range of 0 to about 4 V, and is raised with an increase in environmental temperature in a range of more than about 4 V. The change in transmittance caused by temperature change occurs due to thermal fluctuation of molecules of the liquid crystal as the host-material and molecules of the pigment as the guest material of the GH liquid crystal device 12. To be more specific, if the molecules of the liquid crystal and pigment are aligned in the direction perpendicular to a substrate plane, the components, projected on the substrate plane, of the absorption axes of the pigment molecules (in parallel to the major axes of the pigment molecules) are increased due to the fluctuation of the

molecules, with a result that the absorption of light by the pigment molecules is increased, that is, the light shielding characteristic is raised. On the contrary, if the molecules of the liquid crystal and pigment are aligned in the direction parallel to the substrate plane, the components, projected on the substrate plane, of the absorption axes of the pigment molecules are decreased due to the fluctuation of the molecules, with a result that the absorption of light by the pigment molecules is decreased, that is, the light shielding characteristic is reduced.

Feedback Control Based on Monitored Light Detection

Signal

To avoid a variation in transmittance depending on an environmental temperature, according to this embodiment, there was adopted a method of monitoring the controlled quantity of transmission light (that is, the controlled transmittance), comparing it with a setting transmittance predetermined on the basis of an environmental temperature, and feeding back correction information to a control unit, thereby correcting the waveform of the voltage applied to the liquid crystal device so as to make constant the transmittance. With this method, the effect of an environmental temperature

exerted on the transmittance can be eliminated without directly monitoring the environmental temperature. For example, if an actual transmittance becomes larger than the setting transmittance by the effect of temperature rise, the pulse height of each drive pulse may be increased so that the actual transmittance corresponds to the setting transmittance (see Fig. 26). The means for monitoring light may be configured as a detector such as a photodiode, or an image pickup device, typically, a CCD (charge Coupled Device)

Control Method Based on Temperature Detection Signal

As shown in Fig. 26, the transmittance of the liquid crystal device driven by the same applied voltage differs depending on temperature change. The repeatability of the V-T characteristic of the liquid crystal device, varied depending on an environmental temperature, however, is desirable. For example, as shown in Fig. 27, there can be obtained a substantially linear conversion relationship between a voltage applied to the liquid crystal for obtaining a transmittance at 23.5°C and a voltage applied to the liquid crystal device at 65°C for obtaining the same transmittance.

Accordingly, a transmittance of the liquid crystal device can be usually kept constant without effect of

temperature change by monitoring an environmental temperature of the device, correcting the present voltage into a new voltage corresponding to the monitored environmental temperature on the basis of the conversion relationship shown in Fig. 27, or adding or subtracting a voltage difference (shown in Fig. 28) corresponding to a voltage at the monitored environmental temperature (shown in Fig. 27), which voltage difference is read out from a look-up table, to or from the present voltage. In this way, according to the present invention, the transmittance characteristic of the liquid crystal device less affected by an environmental temperature can be obtained by controlling the present pulse voltage into a voltage corresponding to the monitored environmental temperature.

Temperature Dependence on Transmittance-Applied Voltage
Characteristic of Positive type Liquid Crystal Device




The same GH cell as that described above except that a positive type liquid crystal (trade name: MLC-6849, produced by Merck) was used as the host material was prepared, and the temperature dependence on the transmittance-applied voltage characteristic of the GH cell was examined.

As the result of the drive of the GH liquid crystal




cell using such a positive type nematic liquid crystal by using an applied voltage having an AC waveform (1 kHz) shown in Fig. 3C, it was found, as in the case of Fig. 2, that on the low voltage side, the light absorption by the liquid crystal was increased because of alignment of liquid crystal molecules in the horizontal direction, and as shown in Figs. 30 and 31, such light absorption was decreased with a temperature rise, and that on the high voltage side, the light absorption by the liquid crystal was decreased, and as shown in Figs. 30 and 31, such light absorption was increased with a temperature rise. Accordingly, even in this case, the transmittance of the GH cell varied depending on the environmental temperature can be kept constant by the same manner as that described above.

Examples of positive type host materials ($\Delta\epsilon > 0$) usable for the light modulation apparatus according to the present invention may include compounds having the following molecular structures:




[Example 1]

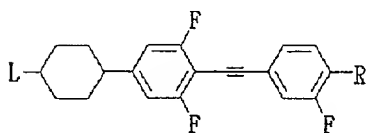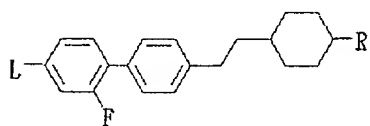






[Example 2]

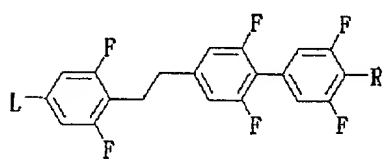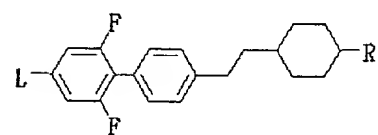








[Example 3]

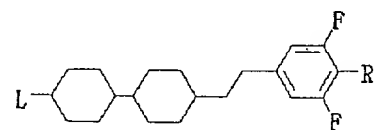







[Example 4]







[Example 5]









[Example 6]










[Example 7]










[Example 8]







[Example 9]










[Example 10]









[Example 11]









[Example 12]









[Example 13]



[Example 14]



[Example 15]



Examples of positive type host materials usable for the light modulation apparatus according to the present invention may include the following commercially available compounds:

[First Examples (trade names) of compounds produced by Merck]

	Phase transition temperature (N → 1) (°C)	Δn Index of birefringence	V10 (V)	V90 (V)	Viscosity at 20 °C (mm ² /s)	Viscosity at -30 °C (mm ² /s)	Rotational viscosity at 20 °C (mPa · s)
ZLI-4792	93.0	0.0969	2.14	3.21	15	420	134
ZLI-5080	103.0	0.0864	1.91	2.89	21	870	220
ZLI-5091	99.5	0.1064	1.77	2.85	23	1200	220
MLC-6043-000	110.0	0.0894	1.76	2.78	24	1300	259
MLC-6043-100	111.5	0.0997	1.82	2.80	25	1300	264
MLC-6219-000	98.0	0.0899	2.04	3.09	17	580	
MLC-6219-100	97.5	0.1115	2.11	3.16	18	650	
MLC-6222	98.5	0.0925	1.60	2.47	24	1220	
MLC-6225-000	82.0	0.0966	2.10	3.17	17	630	119
MLC-6225-100	83.0	0.1058	2.11	3.13	19	810	
MLC-6241-000	100.0	0.0875	1.82	2.95	19	740	
MLC-6241-100	100.0	0.0923	1.87	3.00	19	740	
MLC-6252	98.0	0.0790	1.93	2.99	21	850	193
MLC-6256	98.5	0.1005	1.45	2.28	26	1640	
MLC-6292-000	120.0	0.0903	1.80	2.85	28	1450	
MLC-6292-100	120.0	0.1146	1.83	2.83	25	1450	
MLC-6625	83.5	0.0747	1.77	2.74	15	390	110
MLC-6628	88.0	0.0883	1.65	2.53	19	680	149

	Phase transition temperature (N → 1) (°C)	Δn Index of birefringence	V10 (V)	V90 (V)	Viscosity at 20 °C (mm ² /s)	Viscosity at -30 °C (mm ² /s)	Rotational viscosity at 20 °C (mPa · s)
MLC-6694-000	112.5	0.0838	1.88	2.93	21	920	194
MLC-6694-100	110.0	0.1060	1.88	2.86	21	1070	190
MLC-6846-000	80.0	0.0897	1.30	2.01			172
MLC-6846-100	80.0	0.1083	1.27	1.95			195
MLC-6847-000	90.5	0.0923	1.40	2.14			197
MLC-6847-100	90.5	0.1084	1.38	2.11			204
MLC-6848-000	70.5	0.0903	1.04	1.64			178
MLC-6848-100	70.5	0.1077	1.03	1.62			205
MLC-6849-000	91.0	0.0921	1.28	1.98			186
MLC-6849-100	90.0	0.1138	1.26	1.93			206
MLC-7700-000	98.0	0.0870	1.66	2.63	23	1000	
MLC-7700-100	100.0	0.1146	1.65	2.57	24	1300	205
MLC-7800-000	100.0	0.0854	2.11	3.21	19	700	
MLC-7800-100	100.0	0.1149	2.13	3.24	19	870	
MLC-9000-000	88.0	0.0874	1.42	2.24	27	1500	244
MLC-9000-100	90.5	0.1137	1.41	2.22	30	2400	238
MLC-9100-000	91.0	0.0852	1.67	2.60	23	1030	193
MLC-9100-100	89.0	0.1134	1.68	2.59	22	1100	166
MLC-9200-000	89.0	0.0848	2.13	3.22	18	590	
MLC-9200-100	90.0	0.1146	2.18	3.24	19	880	

	Phase transition temperature (N → 1) (°C)	Δn Index of birefringence	V10 (V)	V90 (V)	Viscosity at 20 °C (mm ² /s)	Viscosity at -30 °C (mm ² /s)	Rotational viscosity at 20 °C (mPa · s)
MLC-9300-000	110.0	0.0904	1.68	2.68	28	1500	284
MLC-9300-100	109.0	0.1154	1.71	2.64	25	1550	237
MLC-9400-000	108.0	0.0892	2.25	3.44	20	780	188
MLC-9400-100	110.0	0.1150	2.27	3.45	20	970	180
MLC-12000	90.0	0.0876	1.42	2.22	22	1100	186
-000							
MLC-12000	92.0	0.0860	1.68	2.65	18	700	148
-100							
MLC-12100	92.0	0.1128	1.47	2.22	24	1350	183
-000							
MLC-12100	92.0	0.1105	1.74	2.59	19	820	149
-100							
MLC-13200	90.0	0.0871	1.48	2.30	23	1140	186
-000							
MLC-13200	94.5	0.0860	1.77	2.76	19	890	145
-100							
MLC-13300	91.5	0.1093	1.47	2.29	24	1600	201
-000							
MLC-13300	91.0	0.1078	1.77	2.68	20	870	155
-100							

	Phase transition temperature (N → 1) (°C)	Δn Index of birefringence	V10 (V)	V90 (V)	Viscosity at 20 °C (mm ² /s)	Viscosity at -30 °C (mm ² /s)	Rotational viscosity at 20 °C (mPa · s)
MLC-13800	110.0	0.0902	1.69	2.61			228
-000							
MLC-13800	111.0	0.0903	2.15	3.32			151
-100							
MLC-13900	110.5	0.1070	1.63	2.50			235
-000							
MLC-13900	110.5	0.1081	2.15	3.27			167
-100							

[Second Examples (trade names) of compounds produced by
Chisso]

[Example 1]

LIXON 5035XX

S-N transition
Cleaning temperature

< -30.0°C
82.2°C

Viscosity	η	at 20°C	24.3 mPa·s
		at 0°C	70.8 mPa·s
		at -20°C	287.9 mPa·s

Resistivity	ρ	at 25°C	$> 1 \times 10^{18} \Omega\text{-cm}$
-------------	--------	---------	---------------------------------------

Optical anisotropy	Δn	at 25°C, 589 nm	0.0749
	n_e		1.5582
	n_o		1.4833

Dielectric anisotropy	$\Delta \epsilon$	at 25°C, 1 kHz	4.4
	ϵ''		8.1
	ϵ_1		3.7

[Example 2]

LIXON 5036XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 91.8°C

Viscosity	η	at 20°C	$26.0\text{ mPa}\cdot\text{s}$
		at 0°C	$79.3\text{ mPa}\cdot\text{s}$
		at -20°C	$324.1\text{ mPa}\cdot\text{s}$
Resistivity	ρ	at 25°C	$>1\times 10^{13}\Omega\text{-cm}$
Optical anisotropy	Δn	at $25^{\circ}\text{C}, 589\text{ nm}$	0.0754
	n_e		1.5586
	n_o		1.4832
Dielectric anisotropy	$\Delta\epsilon$	at $25^{\circ}\text{C}, 1\text{ kHz}$	4.5
	ϵ_{\parallel}		8.1
	ϵ_{\perp}		3.6

[Example 3]

LIXON 5037XX

S-N transition $< -20.0^{\circ}\text{C}$
 Cleaning temperature 101.4°C

Viscosity	η	at 20°C	$28.9\text{ mPa}\cdot\text{s}$
		at 0°C	$93.5\text{ mPa}\cdot\text{s}$
		at -20°C	$370.6\text{ mPa}\cdot\text{s}$
Resistivity	ρ	at 25°C	$>1\times 10^{13}\Omega\text{-cm}$
Optical anisotropy	Δn	at $25^{\circ}\text{C}, 589\text{ nm}$	0.0752
	n_e		1.5584
	n_o		1.4832
Dielectric anisotropy	$\Delta\epsilon$	at $25^{\circ}\text{C}, 1\text{ kHz}$	4.5
	ϵ_{\parallel}		8.1
	ϵ_{\perp}		3.6

[Example 4]

LIXON 5038XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 81.6°C

Viscosity	η	at 20°C	25.0 mPa·s
		at 0°C	71.1 mPa·s
		at -20°C	291.0 mPa·s
Resistivity	ρ	at 25°C	$>1 \times 10^{13} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C , 589 nm	0.0813
	n_e		1.5671
	n_o		1.4858
Dielectric anisotropy	$\Delta \epsilon$	at 25°C , 1 kHz	4.6
	ϵ_{\parallel}		8.3
	ϵ_{\perp}		3.7

[Example 5]

LIXON 5039XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 91.1°C

Viscosity	η	at 20°C	25.2 mPa·s
		at 0°C	77.6 mPa·s
		at -20°C	317.2 mPa·s
Resistivity	ρ	at 25°C	$>1 \times 10^{13} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C , 589 nm	0.0806
	n_e		1.5658
	n_o		1.4852
Dielectric anisotropy	$\Delta \epsilon$	at 25°C , 1 kHz	4.7
	ϵ_{\parallel}		8.4
	ϵ_{\perp}		3.7

[Example 6]

LIXON 5040XX

S-N transition	< -30.0°C
Cleaning temperature	101.8°C

Viscosity	η	at 20°C	28.4 mPa·s
		at 0°C	93.5 mPa·s
		at -20°C	363.0 mPa·s
Resistivity	ρ	at 25°C	$>1 \times 10^{13} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C, 589 nm	0.0794
	n_e		1.5649
	n_o		1.4855
Dielectric anisotropy	$\Delta \epsilon$	at 25°C, 1 kHz	4.7
	ϵ_{\parallel}		8.3
	ϵ_{\perp}		3.6

[Example 7]

LIXON 5041XX

S-N transition	< -30.0°C
Cleaning temperature	81.7°C

Viscosity	η	at 20°C	25.4 mPa·s
		at 0°C	74.8 mPa·s
		at -20°C	302.0 mPa·s
Resistivity	ρ	at 25°C	$>1 \times 10^{13} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C, 589 nm	0.0847
	n_e		1.5715
	n_o		1.4868
Dielectric anisotropy	$\Delta \epsilon$	at 25°C, 1 kHz	4.7
	ϵ_{\parallel}		8.4
	ϵ_{\perp}		3.7

[Example 8]

LIXON 5043XX

S-N transition	< -30.0°C
Cleaning temperature	101.9°C

Viscosity	η	at 20°C	28.7 mPa·s
		at 0°C	92.5 mPa·s
		at -20°C	354.6 mPa·s
Resistivity	ρ	at 25°C	$> 1 \times 10^{13} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C, 589 nm	0.0850
	n_e		1.5713
	n_o		1.4863
Dielectric anisotropy	$\Delta \epsilon$	at 25°C, 1 kHz	4.9
	ϵ_{\parallel}		8.5
	ϵ_{\perp}		3.6

[Example 9]

LIXON 5044XX

S-N transition	< -30.0°C
Cleaning temperature	81.0°C

Viscosity	η	at 20°C	24.4 mPa·s
		at 0°C	71.3 mPa·s
		at -20°C	293.1 mPa·s
Resistivity	ρ	at 25°C	$> 1 \times 10^{13} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C, 589 nm	0.0895
	n_e		1.5784
	n_o		1.4889
Dielectric anisotropy	$\Delta \epsilon$	at 25°C, 1 kHz	4.9
	ϵ_{\parallel}		8.7
	ϵ_{\perp}		3.8

[Example 10]

LIXON 5046XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 100.3°C

Viscosity	η	at 20°C	30.2 mPa·s
		at 0°C	92.8 mPa·s
		at -20°C	372.9 mPa·s
Resistivity	ρ	at 25°C	$> 1 \times 10^{18} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C , 589 nm	0.0895
	n_e		1.5776
	n_o		1.4881
Dielectric anisotropy	$\Delta \epsilon$	at 25°C , 1 kHz	4.9
	ϵ_{\parallel}		8.6
	ϵ_{\perp}		3.7

[Example 11]

LIXON 5047XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 80.3°C

Viscosity	η	at 20°C	25.0 mPa·s
		at 0°C	74.0 mPa·s
		at -20°C	306.8 mPa·s
Resistivity	ρ	at 25°C	$> 1 \times 10^{18} \Omega\text{-cm}$
Optical anisotropy	Δn	at 25°C , 589 nm	0.0997
	n_e		1.5922
	n_o		1.4925
Dielectric anisotropy	$\Delta \epsilon$	at 25°C , 1 kHz	5.1
	ϵ_{\parallel}		8.9
	ϵ_{\perp}		3.8

[Example 12]

LIXON 5049XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 101.0°C

Viscosity	η	at 20°C	$30.4\text{ mPa}\cdot\text{s}$
		at 0°C	$92.8\text{ mPa}\cdot\text{s}$
		at -20°C	$429.3\text{ mPa}\cdot\text{s}$
Resistivity	ρ	at 25°C	$>1\times 10^{13}\Omega\cdot\text{cm}$
Optical anisotropy	Δn	at 25°C , 589 nm	0.1015
	n_e		1.5935
	n_o		1.4920
Dielectric anisotropy	$\Delta\epsilon$	at 25°C , 1 kHz	5.1
	ϵ_{\parallel}		8.8
	ϵ_{\perp}		3.7

[Example 13]

LIXON 5050XX

S-N transition $< -30.0^{\circ}\text{C}$
 Cleaning temperature 100.2°C

Viscosity	η	at 20°C	$23.5\text{ mPa}\cdot\text{s}$
		at 0°C	$69.1\text{ mPa}\cdot\text{s}$
		at -20°C	$291.3\text{ mPa}\cdot\text{s}$
Resistivity	ρ	at 25°C	$>1\times 10^{13}\Omega\cdot\text{cm}$
Optical anisotropy	Δn	at 25°C , 589 nm	0.0855
	n_e		1.5732
	n_o		1.4877
Dielectric anisotropy	$\Delta\epsilon$	at 25°C , 1 kHz	3.1
	ϵ_{\parallel}		6.5
	ϵ_{\perp}		3.4

[Example 14]

LIXON 5051XX

S-N transition	< -20.0°C
Cleaning temperature	101.5°C

Viscosity	η	at 20°C	23.9 mPa·s
		at 0°C	69.1 mPa·s
		at -20°C	295.1 mPa·s

Resistivity	ρ	at 25°C	$> 1 \times 10^{18} \Omega\text{-cm}$
-------------	--------	---------	---------------------------------------

Optical anisotropy	Δn	at 25°C, 589 nm	0.0803
	n_e		1.5794
	n_o		1.4891

Dielectric anisotropy	$\Delta \epsilon$	at 25°C, 1 kHz	3.1
	ϵ_{\parallel}		6.5
	ϵ_{\perp}		3.4

Control Method Based on Temperature Detection Signal

As shown in Figs. 30 and 31, the transmittance of the positive type liquid crystal device driven by the same applied voltage differs depending on temperature change. The repeatability of the V-T characteristic of the liquid crystal device, varied depending on an environmental temperature, however, is desirable. For example, as shown in Fig. 32, there can be obtained a substantially linear conversion relationship between a voltage applied to the liquid crystal for obtaining a

transmittance at 25°C and a voltage applied to the liquid crystal device at 65°C for obtaining the same transmittance.

Accordingly, a transmittance of the liquid crystal device can be usually kept constant without effect of temperature change by monitoring an environmental temperature of the device, correcting the present voltage into a new voltage corresponding to the monitored environmental temperature on the basis of the conversion relationship shown in Fig. 32, or adding or subtracting a voltage difference (shown in Fig. 29) corresponding to a voltage at the monitored environmental temperature (shown in Fig. 32), which voltage difference is read out from a look-up table, to or from the present voltage. In this way, according to the present invention, the transmittance characteristic of the liquid crystal device less affected by an environmental temperature can be obtained by controlling the present pulse voltage into a voltage corresponding to the monitored environmental temperature.

Sixth Embodiment

One configuration example of a light modulation apparatus using the GH cell shown in Figs. 3A to 3C will be described with reference to Figs. 33, 34, and 35A to

35C.

Referring to Fig. 33, there is shown a light modulation apparatus 23 including a GH cell 12 and a polarizing plate 11. The GH cell 12, which is enclosed between two glass substrates (not shown), contains negative type liquid crystal molecules as a host material, and positive or negative type dichroic dye molecules as a guest material. The negative type liquid crystal molecules have a negative type dielectric constant anisotropy, and the dichroic dye molecules have a positive type light absorption anisotropy capable of absorbing light in the alignment direction of major axes of the molecules. The light absorption axis of the polarizing plate 11 is set in such a manner as to be made perpendicular to the light absorption axis of the GH cell when a voltage is applied to the GH cell.

The light modulation apparatus 23 is disposed between a front lens group 15 and a rear lens group 16 each of which is composed of a plurality of lenses such as zoom lenses. Light which has passed through the front lens group 15 is linearly polarized via the polarizing plate 11 and is made incident on the GH cell 12. The light emerged from the GH cell 12 is collected by the rear lens group 16 and is projected as an image on an

image pickup screen 17.

The polarizing plate 11 constituting part of the light modulation apparatus 23 is movable in or from an effective optical path of light made incident on the GH cell 12. To be more specific, the polarizing plate 11 can be moved to a position shown by a virtual line, to be thus moved out of the effective path of light. A mechanical iris shown in Fig. 34 may be used as the means for moving the polarizing plate 11 in or from the effective optical path of light.

The mechanical iris, which is a mechanical diaphragm device generally used for a digital still camera or a video camera, mainly includes two iris blades 18 and 19, and a polarizing plate 11 stuck on the iris blade 18. The iris blades 18 and 19 are movable in the vertical direction. As shown in Fig. 34, the iris blades 18 and 19 are relatively moved in the directions shown by arrows 21 by a drive motor (not shown).

With the relative movement of the iris blades 18 and 19, the iris blades 18 and 19 are partially overlapped to each other as shown in Fig. 34, and as the overlapped area becomes larger, an opening 22 on an effective optical path 20 positioned near a center portion between the iris blades 18 and 19 comes to be

covered with the polarizing plate 11.

Fig. 35A to 35C are partial enlarged views of a portion, near the effective optical path 20, of the mechanical iris. When the iris blade 18 is moved down and simultaneously the iris blade 19 is moved up, the polarizing plate 11 stuck on the iris blade 18 is also moved out of the effective optical path 20 as shown in Fig. 35A. On the contrary, when the iris blade 18 is moved up and simultaneously the iris blade 19 is moved down, the iris blades 18 and 19 are overlapped to each other, and as shown in Fig. 35B, the polarizing plate 11 is moved on the effective optical path 20, to gradually cover the opening 22. As shown in Fig. 35C, the overlapped area of the iris blades 18 and 19 becomes larger, the polarizing plate 11 comes to perfectly cover the opening 20.

The operation of the light modulation apparatus 23 using the mechanical iris will be described below.

As an object (not shown) becomes bright, the iris blades 18 and 19, which are opened in the upward and downward directions as shown in Fig. 35A, are driven by the motor (not shown) to be gradually overlapped to each other. Along with such movement of the iris blades 18 and 19, the polarizing plate 11 stuck on the iris blade 18

starts to enter the effective optical path 20, thereby partially covering the opening 22 as shown in Fig. 35B.

At this time, the GH cell 12 is in a state not allowed to absorb light except for slight light absorption due to thermal fluctuation or surface reflection. Accordingly, the intensity distribution of the light having passed through the polarizing plate 11 is nearly equal to that of the light having passed through the opening 22.

The polarizing plate 11 is then put in a state in which it perfectly covers the opening 22 as shown in Fig. 35C. In such a state, if the brightness of the object becomes stronger, the voltage applied to the GH cell 12 is increased to modulate the light by absorbing the light in the GH cell 12.

On the contrary, in the above state, if the object becomes dark, the voltage applied to the GH cell 12 is reduced or cut off to eliminate the light absorption effect by the GH cell 12. If the object becomes darker, the iris blade 18 is moved down and the iris blade 19 is moved up by the motor (not shown), to move the polarizing plate 11 out of the effective optical path 20 as shown in Fig. 35A.

According to this embodiment, since the polarizing

plate 11 whose transmittance is typically in a range of 40 to 50% can be moved out of the effective optical path of light, the light is not absorbed in the polarizing plate 11, with a result that the maximum transmittance of the light modulation apparatus of the present invention can be increased up to a value being as high as twice or more the maximum transmittance of the related art light modulation apparatus including the GH cell and the fixed polarizing plate. It should be noted that the minimum transmittance of the light modulation apparatus of the present invention is equal to that of the related art light modulation apparatus.

Since the polarizing plate 11 is moved in or from the effective optical path of light by using the mechanical iris practically used for a digital still camera, the light modulation apparatus having the above configuration can be easily realized.

Since the light modulation apparatus in this embodiment uses the GH cell 12, the light modulation can be effectively performed by the combination of the light modulation by the polarizing plate 11 and light absorption of the GH cell 12.

In this way, according to the light modulation apparatus in this embodiment, it is possible to enhance

the bright-dark contrast ratio and to keep the light quantity distribution at a nearly constant value.

With respect to the GH cell 12 used in this embodiment, if the light crystal molecules having a negative dielectric constant anisotropy is used as the host material, a negative type (n-type) dichroic dye molecules may be used as the guest material.

The related art light modulation apparatus shown in Figs. 1A to 1C has a problem. Since the polarizing plate 1 is fixed in an effective optical path of light, part of light, for example, 50% of light is usually absorbed in the polarizing plate 1, and further light may be reflected from the surface of the polarizing plate 1. As a result, the maximum transmittance of light passing through the polarizing plate 1 cannot exceed a certain value, for example, 50%, and accordingly, the quantity of light passing through the light modulation apparatus is significantly reduced by light absorption of the polarizing plate 1. This problem is one of the factors which make it difficult to put a light modulation apparatus using a liquid crystal cell into practical use.

On the other hand, various kinds of light modulation apparatuses using no polarizing plate have been proposed. Examples of these apparatuses include a

type using a stack of two GH cells in which the GH cell at the first layer absorbs a polarization component in the direction identical to that of polarized light and the GH cell at the second layer absorbs a polarization component in the direction perpendicular to the polarized light; a type making use of a phase transition between a cholesteric phase and a nematic phase of a liquid crystal cell; and a high polymer scattering type making use of scattering of liquid crystal.

These light modulation apparatuses using no polarizing plate have a problem. Since the optical density (absorbance) ratio between upon application of no voltage and upon application of a voltage is, as described above, as small as only 5, the contrast ratio of the apparatus is too small to normally carry out modulation of light at any location in a wide range from a bright location to a dark location. The light modulation apparatus of the high polymer scattering type has another problem in significantly degrading, when the apparatus is used for an image pickup apparatus, the image formation performance of an optical system of the image pickup apparatus.

The related art light modulation apparatus presents a further problem. Since the transmittance in a

transparent state may become dark depending on the kind of a liquid crystal device used for the apparatus, if an image pickup apparatus provided with the light modulation apparatus is intended to pickup image with a sufficient light quantity in such a transparent state, the light modulation apparatus is required to be removed from an optical system of the image pickup apparatus.

On the contrary, according to this embodiment, since the polarizing plate 11 is movable in or from the effective optical path of light, it is possible to increase the quantity of light, enhance the contrast ratio, and keep constant the quantity of light.

Seventh Embodiment

One example in which the light modulation apparatus 23 described in the sixth embodiment is assembled in a CCD (Charge Coupled Device) camera will be described with reference to Figs. 36 to 38.

Referring to Fig. 36, there is shown a CCD camera 50 including a first lens group 51 and a second lens group (for zooming) 52, which are equivalent to the above-described front lens group 15; a third lens group 53 and a fourth lens group (for focusing) 54, which are equivalent to the above-described rear lens group 16; and a CCD package 55. These components of the CCD camera 50

are spaced in this order at suitable intervals along an optical axis shown by a dashed line. An infrared ray cutoff filter 55a, an optical low pass filter system 55b, and a CCD image pickup device 55c are contained in the CCD package 55. The light modulation apparatus 23 including the GH cell 12 and the polarizing plate 11 according to the present invention for adjusting or restricting the quantity of light is mounted on the same optical path at a position which is located between the second lens group 52 and the third lens group 53 while being offset toward the third lens group 53. The fourth lens group 54 for focussing is movable along the optical path in a range between the third lens group 53 and the CCD package 55 by a linear motor 57, and the second lens group 52 for zooming is movable along the optical path in a range between the first lens group 51 and the light modulation apparatus 23.

Fig. 37 shows an algorithm of a control sequence of a transmittance of the cameral system by the light modulation apparatus 23.

According to this embodiment, since the light modulation apparatus 23 of the present invention set between the second lens group 52 and the third lens group 53 can adjust the quantity of light by an electric field

applied thereto, it is possible to miniaturize the system and substantially reduce an effective range of an optical path, and hence to miniaturize the CCD camera. Since the quantity of light can be suitably controlled by the value of a voltage applied to patterned electrodes, it is possible to prevent a conventional diffraction phenomenon and to eliminate the dimming of an image by making a sufficient quantity of light incident on the image pickup device.

Drive Circuit of Camera System

Fig. 38 is a block diagram showing a drive circuit of the CCD camera. Referring to Fig. 38, the CCD camera includes a drive circuit unit 60 of the CCD image pickup device 55c disposed in the light outgoing side of the light modulation apparatus 23. An output signal from the CCD image pickup device 55c is processed by an Y/C signal processing unit 61 and is fed back as luminance information (Y signal) to a GH cell drive control circuit unit 62. An environmental temperature of the GH cell 12 is detected by a thermistor 65 and the detection temperature information is fed back to the control circuit unit 62. Each drive pulse, whose pulse height or pulse width is modulated in synchronization with a basic clock generated from the drive circuit unit 60 on the

basis of a control signal from the control circuit unit 62, is generated from a pulse generation circuit unit 63. The control circuit unit 62 and the pulse generation circuit unit 63 constitute a GH liquid crystal drive circuit unit 64 for modulating the pulse height or pulse width of each drive pulse.

The above-described camera system may be replaced with another system in which light emerged from the light modulation apparatus 23 is detected by a photodetector (or photomultiplier tube); luminance information of the light detected by the photodetector is fed back, together with temperature information detected by the thermistor 65, to the control circuit unit 62; and each drive pulse, whose pulse height or pulse width is modulated in synchronization with a clock generated by a GH cell drive circuit unit (not shown) on the basis of the above luminance information and temperature information, is generated by the pulse generation circuit unit.

Additionally, a basic clock such as a field decision signal, a vertical synchronization signal, or a blacking signal, or a reset gate signal can be used as a synchronization signal for changing the GH control waveform in a period other than a CCD image pickup accumulation time. Further, the luminance information and

temperature information can be independently or simultaneously fed back.

Although the preferred embodiments of the present invention have been described, such description is for illustrative purposes only, and it is to be understood that many changes and variations may be made without departing from the technical thought of the present invention.

For example, the structure and material of each of the liquid crystal device and polarizing plate, its drive mechanism, and the configuration of each of the drive circuit and control circuit may be variously changed. The drive waveform of each drive pulse applied between electrodes may be a rectangular, trapezoidal or sine waveform insofar as it allows changes in directors of liquid crystal molecules, to control the transmittance of the light modulation apparatus. The means for detecting the temperature of the light modulation apparatus is not limited to the thermistor but may be another sensor.

The GH cell is not limited to that described in the embodiments but may be a GH cell having a double-layer structure. Although the position of the polarizing plate 11 relative to the GH cell 12 is located between the front lens group 15 and the rear lens group 16 in the

embodiment, it is not limited thereto but may be suitably determined in consideration of the setting conditions of the image pickup lenses. To be more specific, the polarizing plate 11 may be freely located on the object side or image pickup device side, for example, at a position between the image pickup screen 17 and the rear lens group 16. Further, the polarizing plate 11 may be disposed in front of or at the back of a single lens changed from the front lens group 15 or rear lens group 16.

The number of the iris blades 18 and 19 is not limited to two, but may be one or two or more. The iris blades 18 and 19 may be moved in the direction other than the vertical direction to be overlapped to each other, or may be spirally moved in the direction from the periphery to the center.

While the polarizing plate 11 is stuck on the iris blade 18 in the embodiment, it may be stuck on the iris blade 19.

In the embodiment, as the object becomes bright, the light modulation by movement of the polarizing plate 11 is first performed and then the light absorption by the GH cell 12 is performed; however, as the object becomes bright, the light absorption by the GH cell 12

may be first performed until the transmittance of the GH cell 12 is reduced to a specific value and then the light modulation by movement of the polarizing plate 11 be performed.

The means of moving the polarizing plate 11 in or from the effective optical path 20 is not limited to the mechanical iris. For example, the movement of the polarizing plate 11 in or from the effective optical path 20 may be performed by directly providing a film, on which the polarizing plate 11 is stuck, on a drive motor and operating the drive motor.

In the embodiment, the polarizing plate 11 is moved in or from the effective optical path 20; however, it may be of course fixed on the effective optical path.

The light modulation apparatus may be used in combination with any one of known filter materials such as an organic electrochromic material, liquid crystal, or electroluminescence material or the like.

The light modulation apparatus of the present invention may be used not only for an optical diaphragm of an image pickup apparatus such as a CCD camera but also for other optical systems such as a light quantity adjustment device for an electrophotographic reproduction machine or optical communication equipment. The light

modulation apparatus may be used not only for an optical filter but also for other image display devices for displaying characters or images.

What is Claimed is:

1. A light modulation apparatus comprising:
a liquid crystal device; and
a polarizing plate disposed in an optical path of light made incident on said liquid crystal device;
wherein said liquid crystal device is of a guest-host type using a negative type liquid crystal as a host material.
2. A light modulation apparatus according to claim 1, wherein said negative type liquid crystal of said liquid crystal device has a negative type dielectric constant anisotropy and a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material, and said polarizing plate is movable in or from the optical path.
3. A light modulation apparatus according to claim 2, wherein said polarizing plate is disposed in a movable portion of a mechanical iris, and is movable in or from the optical path by operation of said movable portion of said mechanical iris.
4. A light modulation apparatus according to claim 1, wherein a cell of said liquid crystal device has a gap thickness of 5 μm or less.
5. A light modulation apparatus according to claim

1, wherein an alignment film of said liquid crystal device is rubbed by an anti-parallel rubbing process.

6. A light modulation apparatus comprising:

a liquid crystal device;

a drive pulse generation unit for driving said liquid crystal device; and

a pulse width control unit for modulating a pulse width of each drive pulse to be applied to said liquid crystal device, thereby controlling a transmittance of light made incident on said liquid crystal device.

7. A light modulation apparatus according to claim 6, wherein the pulse width of each drive pulse is modulated with its pulse height kept constant.

8. A light modulation apparatus according to claim 6, wherein an average per unit time of positive and negative pulse heights of drive pulses applied between drive electrodes of said liquid crystal device upon modulation of the pulse width of each drive pulse is preferably nearly zero.

9. A light modulation apparatus according to claim 6, wherein the modulation of the pulse width of each drive pulse is performed in such a manner that the waveform of each drive pulse is present in a period of a basic frequency.

10. A light modulation apparatus according to claim 9, wherein the basic frequency and the modulated pulse width are adjusted in such a manner as to prevent the occurrence of flicker in stationary drive of said light modulation apparatus.

11. A light modulation apparatus according to claim 9, further comprising a drive circuit unit, wherein each drive pulse whose waveform is present in the period of the basic frequency is generated in synchronization with a clock generated by said drive circuit unit.

12. A light modulation apparatus according to claim 11, further comprising a control circuit unit, wherein luminance information of the light emerged from said liquid crystal device is fed back to said control circuit unit, and the pulse width of each drive pulse is modulated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

13. A light modulation apparatus according to claim 6, wherein said liquid crystal device is a guest-host type liquid crystal device.

14. A light modulation apparatus according to claim 13, wherein a host material is a negative or positive type liquid crystal having a negative or

positive type dielectric constant anisotropy.

15. A light modulation apparatus according to claim 13, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

16. A light modulation apparatus according to claim 6, further comprising a polarizing plate disposed in an optical path of light made incident on said liquid crystal device.

17. A light modulation apparatus according to claim 16, wherein said polarizing plate is movable in or from the optical path.

18. A light modulation apparatus according to claim 17, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

19. A light modulation apparatus according to claim 6, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

20. A light modulation apparatus comprising:

a liquid crystal device; and

a pulse control unit for changing the transmittance of light made incident on said liquid crystal device from a current transmittance into a target transmittance by applying drive pulses controlled with at least two-steps to said liquid crystal device.

21. A light modulation apparatus according to claim 20, wherein a pulse height of each drive pulse is controlled with at least two-steps.

22. A light modulation apparatus according to claim 20, wherein a pulse width of each drive pulse is controlled with at least two-steps.

23. A light modulation apparatus according to claim 20, further comprising a drive circuit unit, wherein the drive pulse is generated in synchronization with a clock generated by said drive circuit unit.

24. A light modulation apparatus according to claim 23, further comprising a control circuit unit, wherein luminance information of the light emerged from said liquid crystal device is fed back to said control circuit unit, and the drive pulse is generated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

25. A light modulation apparatus according to

claim 20, wherein said liquid crystal device is a guest-host type liquid crystal device.

26. A light modulation apparatus according to claim 25, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

27. A light modulation apparatus according to claim 25, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

28. A light modulation apparatus according to claim 20, further comprising a polarizing plate disposed in an optical path of light made incident on said liquid crystal device.

29. A light modulation apparatus according to claim 28, wherein said polarizing plate is movable in or from the optical path.

30. A light modulation apparatus according to claim 29, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

31. A light modulation apparatus according to claim 20, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

32. A light modulation apparatus comprising:

a liquid crystal device;

a detection unit for detecting the intensity of transmission light having passed through said liquid crystal device or an environmental temperature of said liquid crystal device;

a control circuit unit for setting a target intensity of the transmission light depending on the environmental temperature of said liquid crystal device on the basis of a detection value supplied from said detection unit; and

a drive signal generation unit for generating a drive signal used for generating the target intensity of the transmission light.

33. A light modulation apparatus according to claim 32, wherein the transmittance is controlled by monitoring the transmission light, feeding back the detection information to the control circuit unit, and adjusting the intensity of the transmission light at a constant value on the basis of the detection information

by said control circuit unit, or by monitoring an environmental temperature of said liquid crystal device, feeding back the detection information to said control circuit unit, comparing the detection information with a predetermined characteristic value, and adjusting the intensity of the transmission light at a constant value on the basis of the compared detection information by said control circuit unit.

34. A light modulation apparatus according to claim 32, wherein said control circuit unit generates each drive pulse having an AC waveform whose pulse height is modulated, or each drive pulse whose pulse width or pulse density is modulated.

35. A light modulation apparatus according to claim 33, wherein the pulse width of each drive pulse having a basic waveform is modulated and the pulse height of the drive pulse is controlled depending on the environmental temperature of said liquid crystal device, or the pulse height of each drive pulse having a basic waveform is modulated and the pulse width of the drive pulse is modulated depending on the environmental temperature of said liquid crystal device.

36. A light modulation apparatus according to claim 32, wherein each drive pulse is generated in

synchronization of a clock generated by said drive circuit unit.

37. A light modulation apparatus according to claim 32, wherein said liquid crystal device is a guest-host type liquid crystal device.

38. A light modulation apparatus according to claim 37, wherein a host material is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

39. A light modulation apparatus according to claim 37, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

40. A light modulation apparatus according to claim 35, further comprising a polarizing plate disposed in an optical path of light made incident on said liquid crystal device.

41. A light modulation apparatus according to claim 40, wherein said polarizing plate is movable in or from the optical path.

42. A light modulation apparatus according to claim 31, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as

to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

43. A light modulation apparatus according to claim 32, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

44. An image pickup apparatus comprising:

a light modulation apparatus including a liquid crystal device of a guest-host type using a negative type liquid crystal as a host material, and a polarizing plate disposed in an optical path of light made incident on said liquid crystal device;

wherein said light modulation apparatus is disposed in an optical path of an optical system of said image pickup apparatus.

45. An image pickup apparatus according to claim 44, wherein said negative type liquid crystal of said liquid crystal device has a negative type dielectric constant anisotropy and a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material, and said polarizing plate is movable in or from the optical path.

46. An image pickup apparatus according to claim 45, wherein said polarizing plate is disposed in a

movable portion of a mechanical iris, and is movable in or from the optical path by operation of said movable portion of said mechanical iris.

47. An image pickup apparatus according to claim 44, wherein a cell of said liquid crystal device has a gap thickness of 5 μm or less.

48. An image pickup apparatus according to claim 44, wherein an alignment film of said liquid crystal device is rubbed by an anti-parallel rubbing process.

49. An image pickup apparatus comprising:

a light modulation apparatus including a liquid crystal device, and a pulse control unit for changing the transmittance of light made incident on said liquid crystal device from a current transmittance into a target transmittance by applying drive pulses controlled with at least two-steps to said liquid crystal device;

wherein said light modulation apparatus is disposed in an optical path of an optical system of said image pickup apparatus.

50. An image pickup apparatus according to claim 49, wherein a pulse height of each drive pulse is controlled with at least two-steps.

51. An image pickup apparatus according to claim 49, wherein a pulse width of each drive pulse is

controlled with at least two-steps.

52. An image pickup apparatus according to claim 49, further comprising a drive circuit unit, wherein the drive pulse is generated in synchronization with a clock generated by said drive circuit unit.

53. An image pickup apparatus according to claim 52, wherein said drive circuit unit is a drive circuit unit of an image pickup device disposed on a light outgoing side of said light modulation apparatus, and luminance information of the light emerged from said liquid crystal device is fed back to said control circuit unit, and the drive pulse is generated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

54. An image pickup apparatus according to claim 49, wherein said liquid crystal device is a guest-host type liquid crystal device.

55. An image pickup apparatus according to claim 54, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

56. An image pickup apparatus according to claim 54, wherein a guest material of said liquid crystal

device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

57. An image pickup apparatus according to claim 49, further comprising a polarizing plate disposed in an optical path of light made incident on said liquid crystal device.

58. An image pickup apparatus according to claim 57, wherein said polarizing plate is movable in or from the optical path.

59. An image pickup apparatus according to claim 58, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

60. An image pickup apparatus according to claim 49, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

61. An image pickup apparatus comprising:

a light modulation apparatus including a liquid crystal device, a detection unit for detecting the intensity of transmission light having passed through said liquid crystal device or an environmental

temperature of said liquid crystal device, a control circuit unit for setting a target intensity of the transmission light depending on the environmental temperature of said liquid crystal device on the basis of a detection value supplied from said detection unit, and a drive signal generation unit for generating a drive signal used for generating the target intensity of the transmission light;

wherein said light modulation apparatus is disposed in an optical path of an optical system of said image pickup apparatus.

62. An image pickup apparatus according to claim 61, wherein the transmittance is controlled by monitoring the transmission light, feeding back the detection information to the control circuit unit, and adjusting the intensity of the transmission light at a constant value on the basis of the detection information by said control circuit unit, or by monitoring an environmental temperature of said liquid crystal device, feeding back the detection information to said control circuit unit, comparing the detection information with a predetermined characteristic value, and adjusting the intensity of the transmission light at a constant value on the basis of the compared detection information by said control

circuit unit.

63. An image pickup apparatus according to claim 61, wherein said control circuit unit generates each drive pulse having an AC waveform whose pulse height is modulated, or each drive pulse whose pulse width or pulse density is modulated.

64. An image pickup apparatus according to claim 62, wherein the pulse width of each drive pulse having a basic waveform is modulated and the pulse height of the drive pulse is controlled depending on the environmental temperature of said liquid crystal device, or the pulse height of each drive pulse having a basic waveform is modulated and the pulse width of the drive pulse is modulated depending on the environmental temperature of said liquid crystal device.

65. An image pickup apparatus according to claim 61, wherein each drive pulse is generated in synchronization of a clock generated by said drive circuit unit.

66. An image pickup apparatus according to claim 61, wherein said liquid crystal device is a guest-host type liquid crystal device.

67. An image pickup apparatus according to claim 66, wherein a host material of said liquid crystal device

is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

68. An image pickup apparatus according to claim 66, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

69. An image pickup apparatus according to claim 61, further comprising a polarizing plate disposed in an optical path of light made incident on said liquid crystal device.

70. An image pickup apparatus according to claim 69, wherein said polarizing plate is movable in or from the optical path.

71. An image pickup apparatus according to claim 70, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

72. An image pickup apparatus according to claim 61, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

73. An image pickup apparatus comprising:

a light modulation apparatus including a liquid crystal device, a drive pulse generation unit for driving said liquid crystal device, and a pulse width control unit for modulating a pulse width of each drive pulse to be applied to said liquid crystal device, thereby controlling a transmittance of light made incident on said liquid crystal device;

wherein said light modulation apparatus is disposed in an optical path of an optical system of said image pickup apparatus.

74. An image pickup apparatus according to claim 73, wherein the pulse width of each drive pulse is modulated with its pulse height kept constant.

75. An image pickup apparatus according to claim 73, wherein an average per unit time of positive and negative pulse heights of drive pulses applied between drive electrodes of said liquid crystal device upon modulation of the pulse width of each drive pulse is preferably nearly zero.

76. An image pickup apparatus according to claim 73, wherein the modulation of the pulse width of each drive pulse is performed in such a manner that the waveform of each drive pulse is present in a period of a basic frequency.

77. An image pickup apparatus according to claim 76, wherein the basic frequency and the modulated pulse width are adjusted in such a manner as to prevent the occurrence of flicker in stationary drive of said light modulation apparatus.

78. An image pickup apparatus according to claim 76, further comprising a drive circuit unit, wherein each drive pulse whose waveform is present in the period of the basic frequency is generated in synchronization with a clock generated by said drive circuit unit.

79. An image pickup apparatus according to claim 77, further comprising a control circuit unit, wherein luminance information of the light emerged from said liquid crystal device is fed back to said control circuit unit, and the pulse width of each drive pulse is modulated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

80. An image pickup apparatus according to claim 73, wherein said liquid crystal device is a guest-host type liquid crystal device.

81. An image pickup apparatus according to claim 80, wherein a host material is a negative or positive type liquid crystal having a negative or positive type

dielectric constant anisotropy.

82. An image pickup apparatus according to claim 80, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

83. An image pickup apparatus according to claim 73, further comprising a polarizing plate disposed in an optical path of light made incident on said liquid crystal device.

84. An image pickup apparatus according to claim 83, wherein said polarizing plate is movable in or from the optical path.

85. An image pickup apparatus according to claim 84, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

86. An image pickup apparatus according to claim 73, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

87. A method of driving a light modulation apparatus including a liquid crystal device, comprising

the step of:

changing the transmittance of light made incident on said liquid crystal device from a current transmittance into a target transmittance by applying drive pulses controlled with at least two-steps to said liquid crystal device.

88. A method of driving a light modulation apparatus according to claim 87, wherein a pulse height of each drive pulse is controlled with at least two-steps.

89. A method of driving a light modulation apparatus according to claim 87, wherein a pulse width of each drive pulse is controlled with at least two-steps.

90. A method of driving a light modulation apparatus according to claim 87, wherein the drive pulse is generated in synchronization with a clock generated by a drive circuit unit provided in said light modulation apparatus.

91. A method of driving a light modulation apparatus according to claim 90, wherein luminance information of the light emerged from said liquid crystal device is fed back to a control circuit unit provided in said light modulation apparatus, and the drive pulse is generated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal

supplied from said control circuit unit.

92. A method of driving a light modulation apparatus according to claim 87, wherein said liquid crystal device is a guest-host type liquid crystal device.

93. A method of driving a light modulation apparatus according to claim 92, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

94. A method of driving a light modulation apparatus according to claim 92, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

95. A method of driving a light modulation apparatus according to claim 87, wherein a polarizing plate is disposed in an optical path of light made incident on said liquid crystal device.

96. A method of driving a light modulation apparatus according to claim 95, wherein said polarizing plate is movable in or from the optical path.

97. A method of driving a light modulation apparatus according to claim 96, wherein said polarizing plate is disposed in a movable portion of a mechanical

iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

98. A method of driving a light modulation apparatus according to claim 87, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

99. A method of driving a light modulation apparatus including a liquid crystal device, comprising the steps of:

detecting the intensity of transmission light having passed through said liquid crystal device or an environmental temperature of said liquid crystal device;

setting a target intensity of the transmission light depending on the environmental temperature of said liquid crystal device on the basis of a detection value supplied from said detection unit; and

generating a drive signal used for generating the target intensity of the transmission light.

100. A method of driving a light modulation apparatus according to claim 99, wherein the transmittance is controlled by monitoring the transmission light, feeding back the detection

information to the control circuit unit, and adjusting the intensity of the transmission light at a constant value on the basis of the detection information by said control circuit unit, or by monitoring an environmental temperature of said liquid crystal device, feeding back the detection information to said control circuit unit, comparing the detection information with a predetermined characteristic value, and adjusting the intensity of the transmission light at a constant value on the basis of the compared detection information by said control circuit unit.

101. A method of driving a light modulation apparatus according to claim 99, wherein said control circuit unit generates each drive pulse having an AC waveform whose pulse height is modulated, or each drive pulse whose pulse width or pulse density is modulated.

102. A method of driving a light modulation apparatus according to claim 100, wherein the pulse width of each drive pulse having a basic waveform is modulated and the pulse height of the drive pulse is controlled depending on the environmental temperature of said liquid crystal device, or the pulse height of each drive pulse having a basic waveform is modulated and the pulse width of the drive pulse is modulated depending on the

environmental temperature of said liquid crystal device.

103. A method of driving a light modulation apparatus according to claim 99, wherein each drive pulse is generated in synchronization of a clock generated by a drive circuit unit provided in said light modulation apparatus.

104. A method of driving a light modulation apparatus according to claim 99, wherein said liquid crystal device is a guest-host type liquid crystal device.

105. A method of driving a light modulation apparatus according to claim 104, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

106. A method of driving a light modulation apparatus according to claim 104, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

107. A method of driving a light modulation apparatus according to claim 99, wherein a polarizing plate is disposed in an optical path of light made incident on said liquid crystal device.

108. A method of driving a light modulation

apparatus according to claim 107, wherein said polarizing plate is movable in or from the optical path.

109. A method of driving a light modulation apparatus according to claim 108, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

110. A method of driving a light modulation apparatus according to claim 99, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

111. A method of driving a light modulation apparatus including a liquid crystal device, comprising the step of:

modulating a pulse width of each drive pulse to be applied to said liquid crystal device, thereby controlling a transmittance of light made incident on said liquid crystal device.

112. A method of driving a light modulation apparatus according to claim 111, wherein the pulse width of each drive pulse is modulated with its pulse height kept constant.

113. A method of driving a light modulation apparatus according to claim 111, wherein an average per unit time of positive and negative pulse heights of drive pulses applied between drive electrodes of said liquid crystal device upon modulation of the pulse width of each drive pulse is preferably nearly zero.

114. A method of driving a light modulation apparatus according to claim 111, wherein the modulation of the pulse width of each drive pulse is performed in such a manner that the waveform of each drive pulse is present in a period of a basic frequency.

115. A method of driving a light modulation apparatus according to claim 114, wherein the basic frequency and the modulated pulse width are adjusted in such a manner as to prevent the occurrence of flicker in stationary drive of said light modulation apparatus.

116. A method of driving a light modulation apparatus according to claim 114, wherein each drive pulse whose waveform is present in the period of the basic frequency is generated in synchronization with a clock generated by a drive circuit unit provided in said light modulation apparatus.

117. A method of driving a light modulation apparatus according to claim 116, wherein luminance

information of the light emerged from said liquid crystal device is fed back to a control circuit unit provided in said light modulation apparatus, and the pulse width of each drive pulse is modulated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

118. A method of driving a light modulation apparatus according to claim 111, wherein said liquid crystal device is a guest-host type liquid crystal device.

119. A method of driving a light modulation apparatus according to claim 118, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

120. A method of driving a light modulation apparatus according to claim 118, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

121. A method of driving a light modulation apparatus according to claim 111, wherein a polarizing plate is disposed in an optical path of light made incident on said liquid crystal device.

122. A method of driving a light modulation apparatus according to claim 121, wherein said polarizing plate is movable in or from the optical path.

123. A method of driving a light modulation apparatus according to claim 122, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

124. A method of driving a light modulation apparatus according to claim 111, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

125. A method of driving an image pickup apparatus in which a liquid crystal device is disposed in an optical path of an optical system of said image pickup apparatus, comprising the step of:

changing the transmittance of light made incident on said liquid crystal device from a current transmittance into a target transmittance by applying drive pulses controlled with at least two-steps to said liquid crystal device.

126. A method of driving an image pickup apparatus

according to claim 125, wherein a pulse height of each drive pulse is controlled with at least two-steps.

127. A method of driving an image pickup apparatus according to claim 125, wherein a pulse width of each drive pulse is controlled with at least two-steps.

128. A method of driving an image pickup apparatus according to claim 125, wherein the drive pulse is generated in synchronization with a clock generated by a drive circuit unit provided in said light modulation apparatus.

129. A method of driving an image pickup apparatus according to claim 125, wherein a drive circuit unit of an image pickup device is disposed on a light outgoing side of said light modulation apparatus; and luminance information of the light emerged from said liquid crystal device is fed back to a control circuit unit provided in said light modulation apparatus, and the drive pulse is generated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

130. A method of driving an image pickup apparatus according to claim 125, wherein said liquid crystal device is a guest-host type liquid crystal device.

131. A method of driving an image pickup apparatus

according to claim 130, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

132. A method of driving an image pickup apparatus according to claim 130, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

133. A method of driving an image pickup apparatus according to claim 125, wherein a polarizing plate is disposed in an optical path of light made incident on said liquid crystal device.

134. A method of driving an image pickup apparatus according to claim 133, wherein said polarizing plate is movable in or from the optical path.

135. A method of driving an image pickup apparatus according to claim 134, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical path by operation of said movable portion of said mechanical iris.

136. A method of driving an image pickup apparatus according to claim 125, wherein a drive electrode of said

liquid crystal device is formed at least over the entire region of an effective light transmission portion.

137. A method of driving an image pickup apparatus in which a liquid crystal device is disposed in an optical path of an optical system of said image pickup apparatus, comprising the steps of:

detecting the intensity of transmission light having passed through said liquid crystal device or an environmental temperature of said liquid crystal device;

setting a target intensity of the transmission light depending on the environmental temperature of said liquid crystal device on the basis of a detection value supplied from said detection unit; and

generating a drive signal used for generating the target intensity of the transmission light.

138. A method of driving an image pickup apparatus according to claim 137, wherein the transmittance is controlled by monitoring the transmission light, feeding back the detection information to the control circuit unit, and adjusting the intensity of the transmission light at a constant value on the basis of the detection information by said control circuit unit, or by monitoring an environmental temperature of said liquid crystal device, feeding back the detection information to

said control circuit unit, comparing the detection information with a predetermined characteristic value, and adjusting the intensity of the transmission light at a constant value on the basis of the compared detection information by said control circuit unit.

139. A method of driving an image pickup apparatus according to claim 137, wherein said control circuit unit generates each drive pulse having an AC waveform whose pulse height is modulated, or each drive pulse whose pulse width or pulse density is modulated.

140. A method of driving an image pickup apparatus according to claim 138, wherein the pulse width of each drive pulse having a basic waveform is modulated and the pulse height of the drive pulse is controlled depending on the environmental temperature of said liquid crystal device, or the pulse height of each drive pulse having a basic waveform is modulated and the pulse width of the drive pulse is modulated depending on the environmental temperature of said liquid crystal device.

141. A method of driving an image pickup apparatus according to claim 137, wherein each drive pulse is generated in synchronization of a clock generated by a drive circuit unit provided in said light modulation apparatus.

142. A method of driving an image pickup apparatus according to claim 137, wherein said liquid crystal device is a guest-host type liquid crystal device.

143. A method of driving an image pickup apparatus according to claim 142, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

144. A method of driving an image pickup apparatus according to claim 142, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

145. A method of driving an image pickup apparatus according to claim 137, wherein a polarizing plate is disposed in an optical path of light made incident on said liquid crystal device.

146. A method of driving an image pickup apparatus according to claim 137, wherein said polarizing plate is movable in or from the optical path.

147. A method of driving an image pickup apparatus according to claim 146, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical

path by operation of said movable portion of said mechanical iris.

148. A method of driving an image pickup apparatus according to claim 137, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

149. A method of driving an image pickup apparatus in which a liquid crystal device is disposed in an optical path of an optical system of said image pickup apparatus, comprising the step of:

modulating a pulse width of each drive pulse to be applied to said liquid crystal device, thereby controlling a transmittance of light made incident on said liquid crystal device.

150. A method of driving an image pickup apparatus according to claim 149, wherein the pulse width of each drive pulse is modulated with its pulse height kept constant.

151. A method of driving an image pickup apparatus according to claim 149, wherein an average per unit time of positive and negative pulse heights of drive pulses applied between drive electrodes of said liquid crystal device upon modulation of the pulse width of each drive pulse is preferably nearly zero.

152. A method of driving an image pickup apparatus according to claim 149, wherein the modulation of the pulse width of each drive pulse is performed in such a manner that the waveform of each drive pulse is present in a period of a basic frequency.

153. A method of driving an image pickup apparatus according to claim 152, wherein the basic frequency and the modulated pulse width are adjusted in such a manner as to prevent the occurrence of flicker in stationary drive of said light modulation apparatus.

154. A method of driving an image pickup apparatus according to claim 152, wherein each drive pulse whose waveform is present in the period of the basic frequency is generated in synchronization with a clock generated by a drive circuit unit provided in said light modulation apparatus.

155. A method of driving an image pickup apparatus according to claim 149, wherein luminance information of the light emerged from said liquid crystal device is fed back to a control circuit unit provided in said light modulation apparatus, and the pulse width of each drive pulse is modulated in synchronization with a clock generated by said drive circuit unit on the basis of a control signal supplied from said control circuit unit.

156. A method of driving an image pickup apparatus according to claim 149, wherein said liquid crystal device is a guest-host type liquid crystal device.

157. A method of driving an image pickup apparatus according to claim 156, wherein a host material of said liquid crystal device is a negative or positive type liquid crystal having a negative or positive type dielectric constant anisotropy.

158. A method of driving an image pickup apparatus according to claim 156, wherein a guest material of said liquid crystal device is a positive or negative type dichroic dye molecular material having a positive or negative type light absorption anisotropy.

159. A method of driving an image pickup apparatus according to claim 149, wherein a polarizing plate is disposed in an optical path of light made incident on said liquid crystal device.

160. A method of driving an image pickup apparatus according to claim 159, wherein said polarizing plate is movable in or from the optical path.

161. A method of driving an image pickup apparatus according to claim 160, wherein said polarizing plate is disposed in a movable portion of a mechanical iris in such a manner as to be movable in or from the optical

path by operation of said movable portion of said mechanical iris.

162. A method of driving an image pickup apparatus according to claim 149, wherein a drive electrode of said liquid crystal device is formed at least over the entire region of an effective light transmission portion.

ABSTRACT OF THE DISCLOSURE

Disclosed are a light modulation apparatus including a liquid crystal device; and a polarizing plate disposed in an optical path of light made incident on said liquid crystal device; wherein said liquid crystal device is of a guest-host type using a negative type liquid crystal as a host material, an image pickup apparatus using the light modulation apparatus, and methods of driving the light modulation apparatus and image pickup apparatus.

FIG. 1A APPLICATION OF NO VOLTAGE

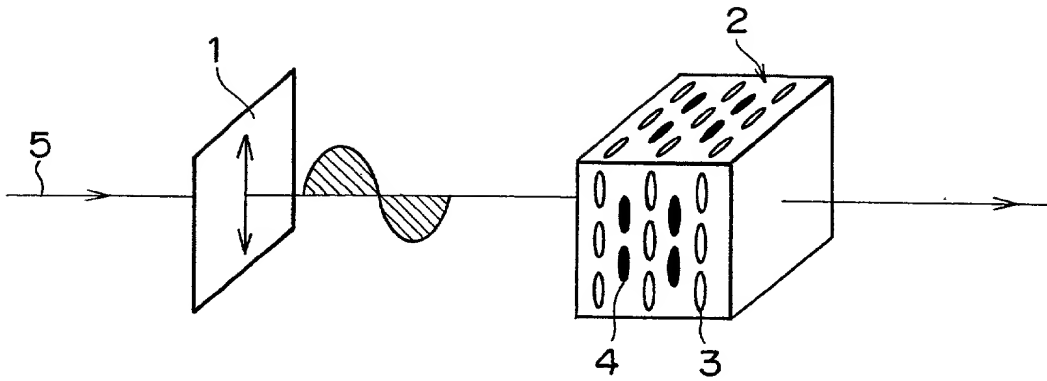


FIG. 1B APPLICATION OF VOLTAGE

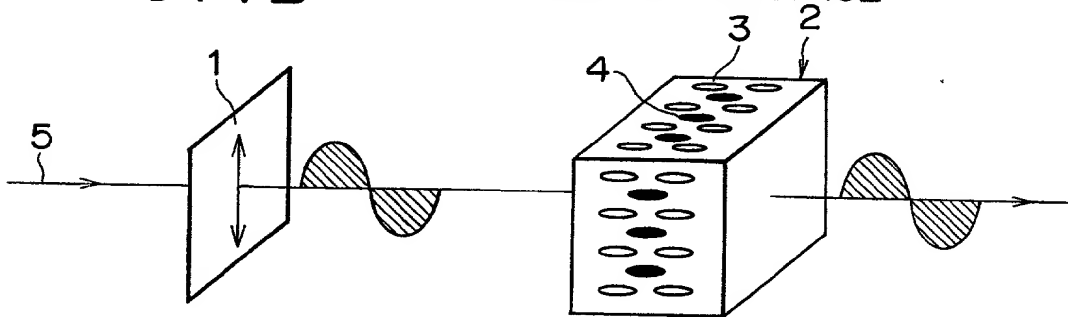


FIG. 1C DRIVE WAVEFORM OF RECTANGULAR WAVE

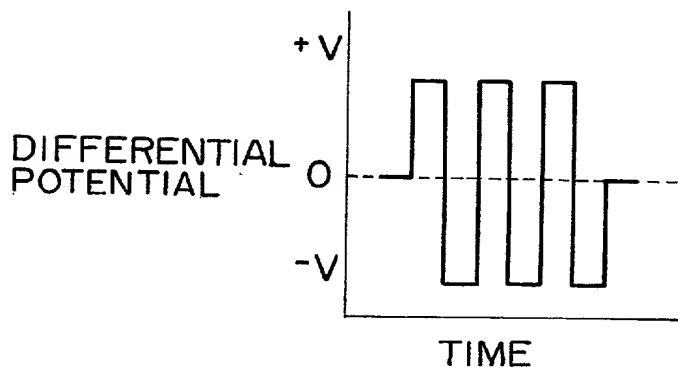


FIG. 2A

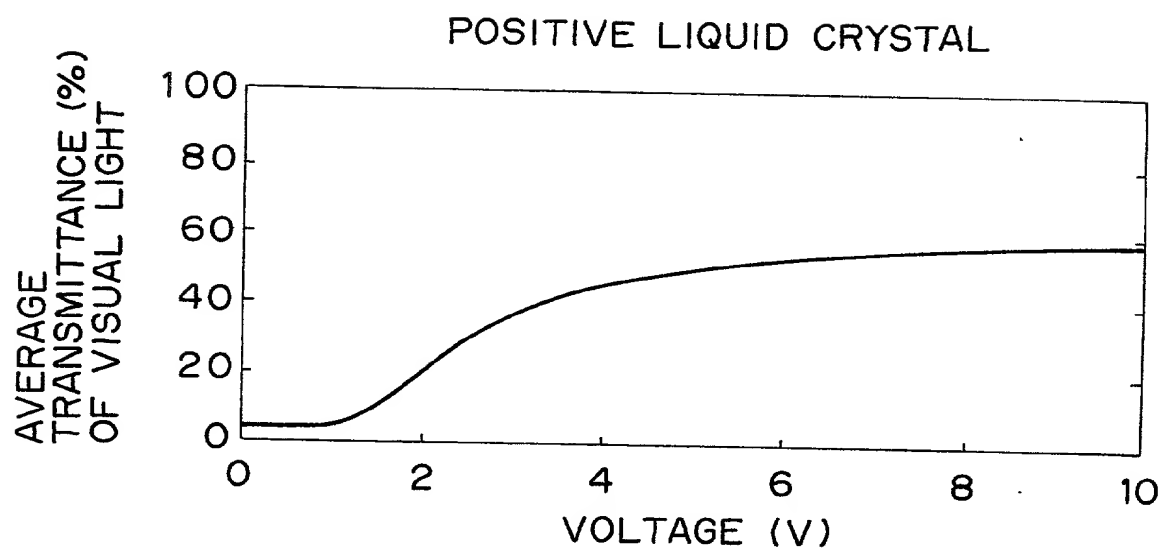


FIG. 2B

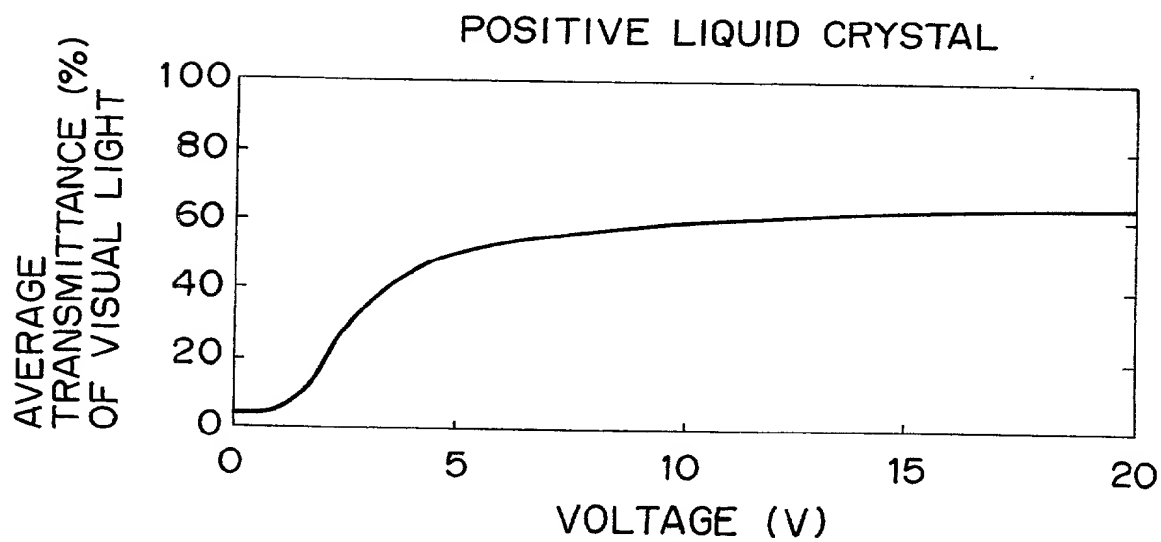


FIG. 3A

APPLICATION OF NO VOLTAGE

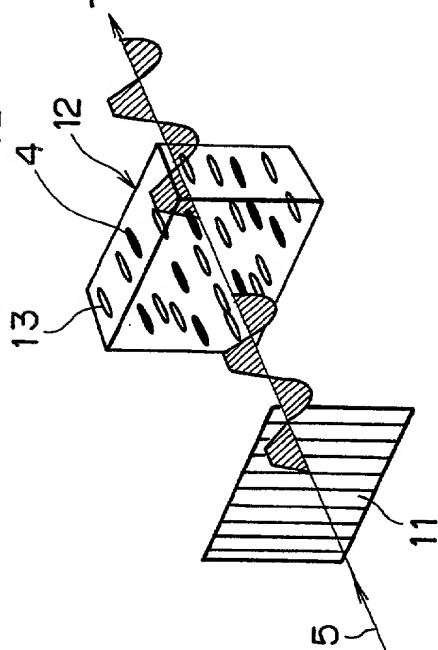


FIG. 3B

APPLICATION OF VOLTAGE

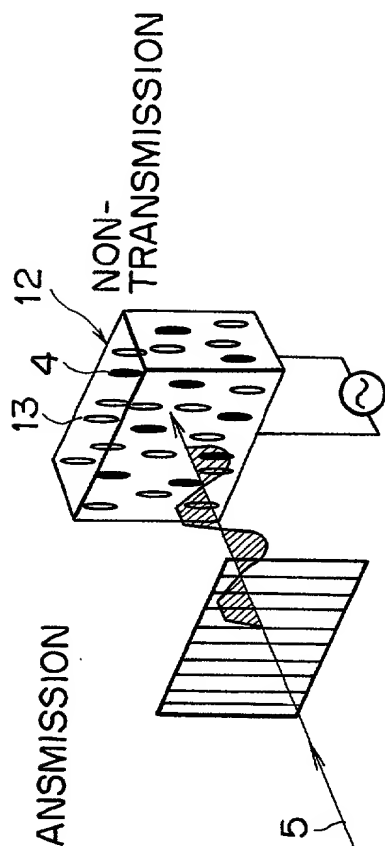
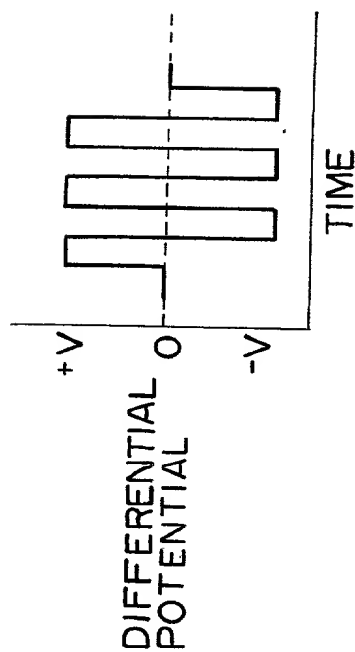
FIG. 3C
DRIVE WAVEFORM OF
RECTANGULAR WAVE

FIG. 4A

NEGATIVE LIQUID CRYSTAL

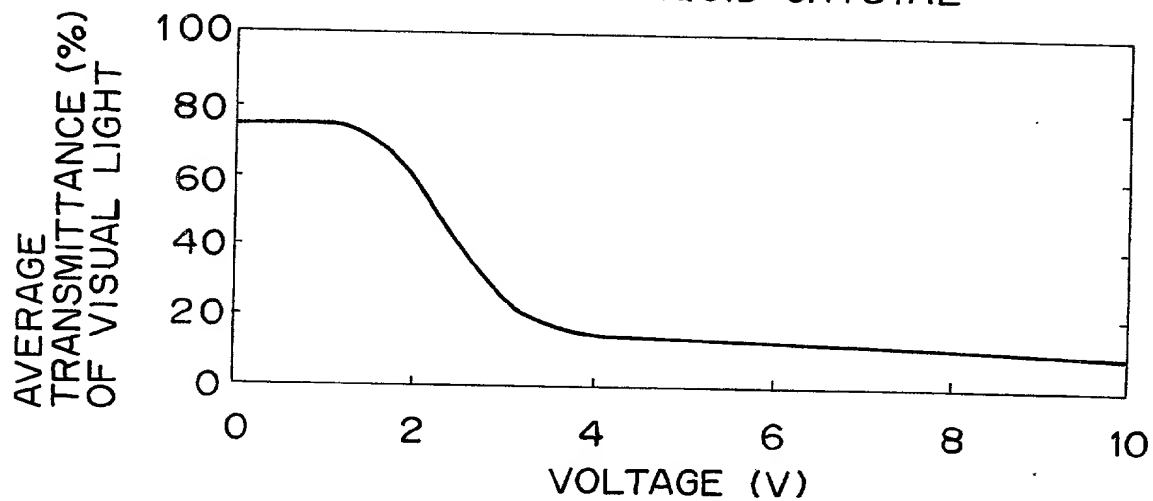


FIG. 4B

NEGATIVE LIQUID CRYSTAL

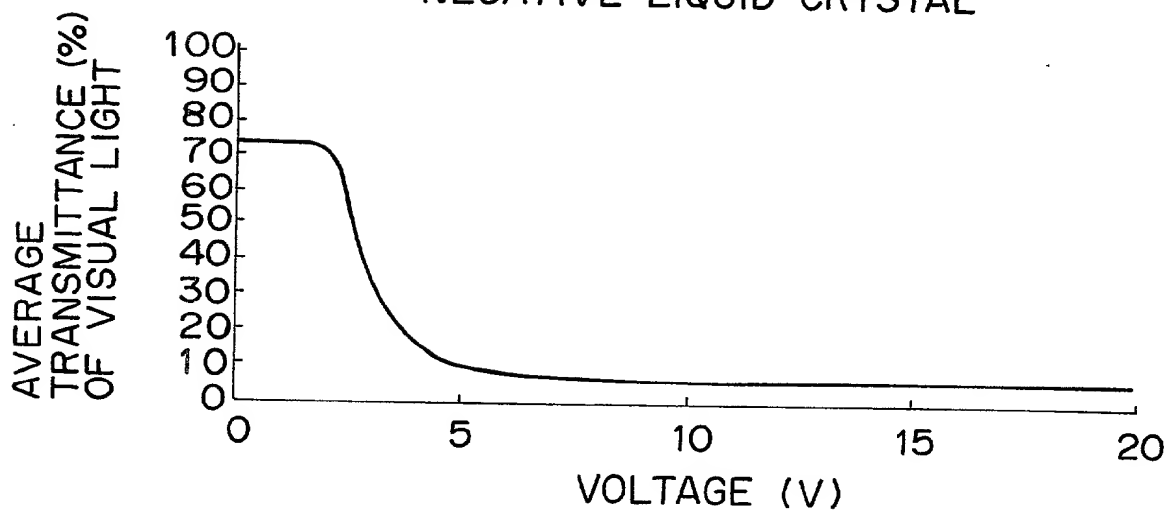


FIG. 5A

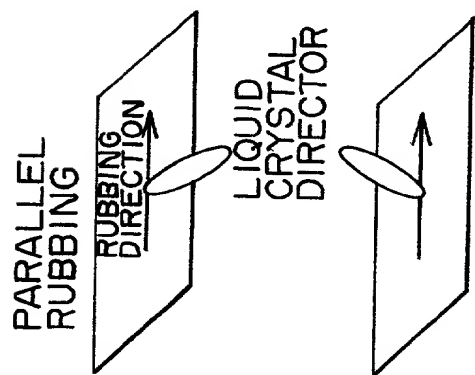


FIG. 5B


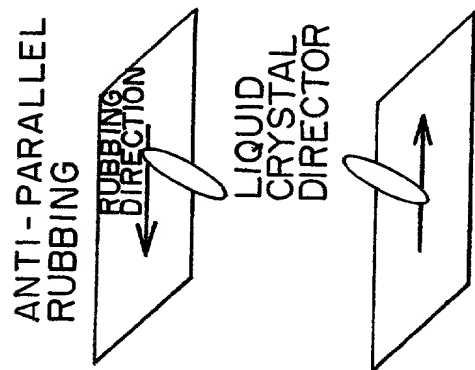


FIG. 5C

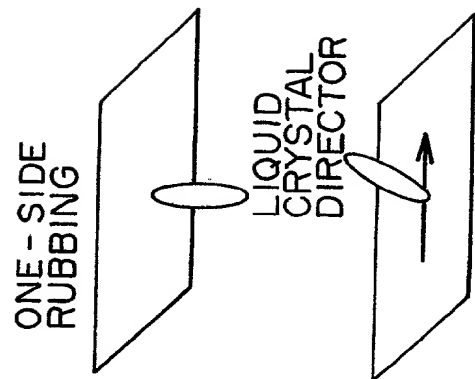

	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431</
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	--------


[illegible]

FIG. 6C

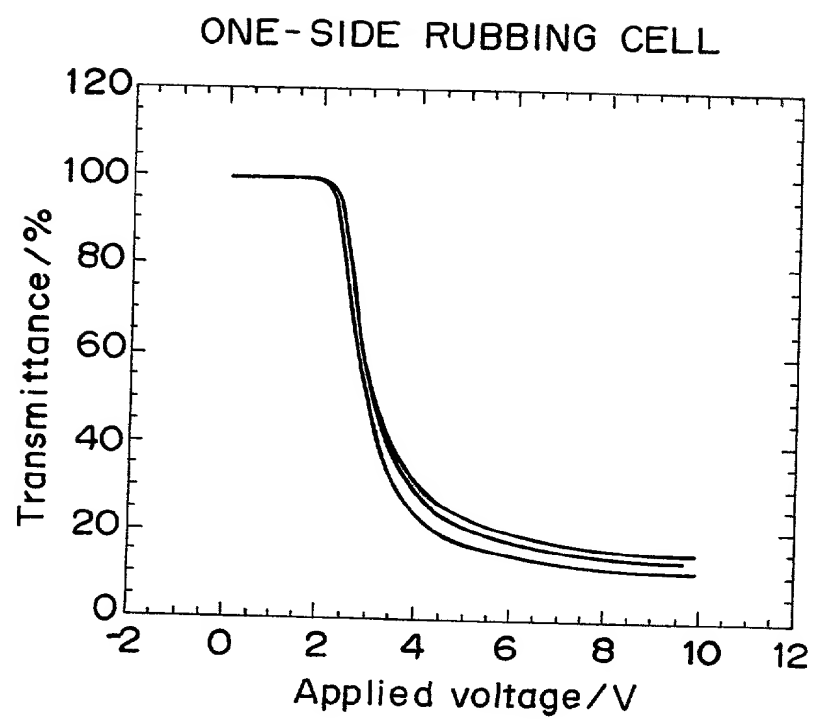


FIG. 7

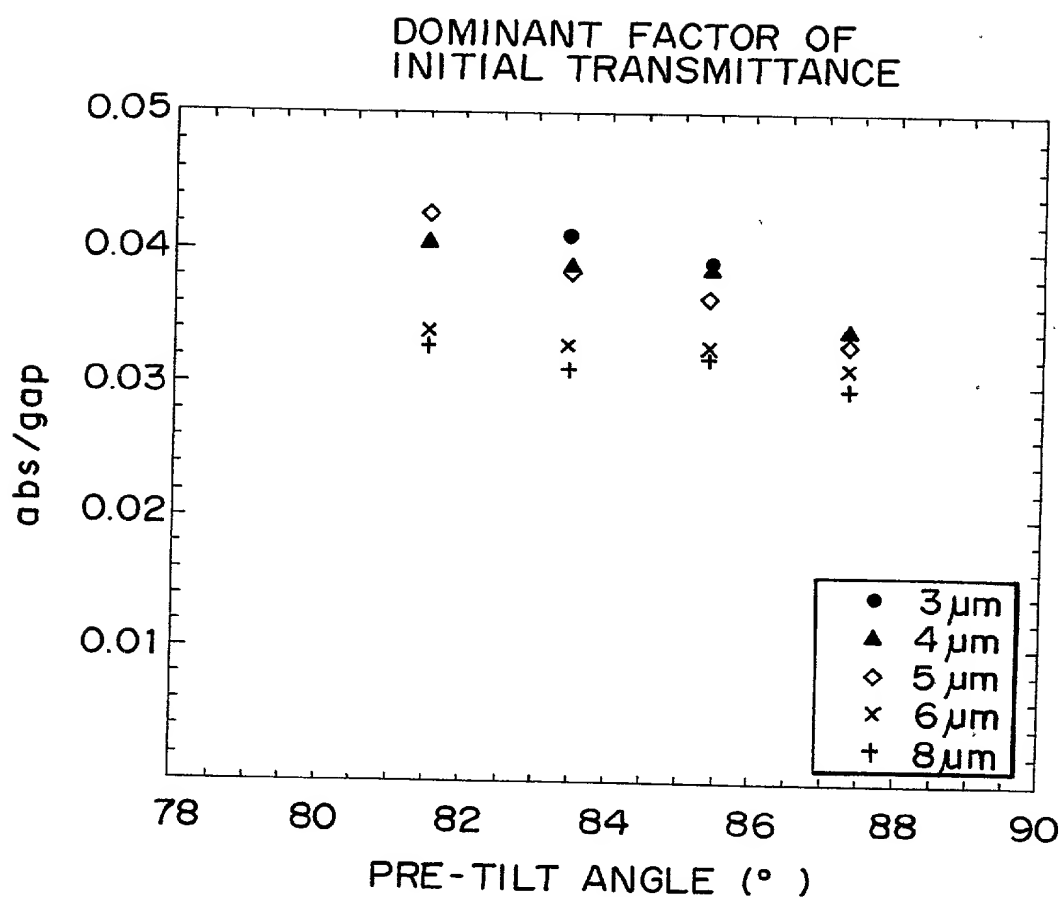


FIG. 8A

[COMPARISON IN RESPONSE SPEED AT 2-3V (22°C)]

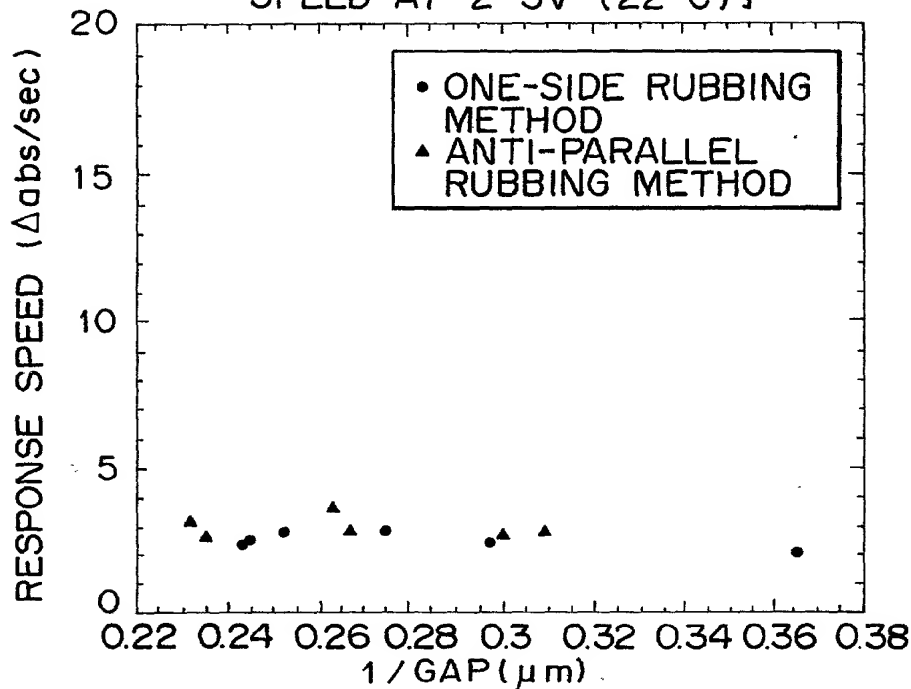


FIG. 8B

[COMPARISON IN RESPONSE SPEED AT 0-5V (22°C)]

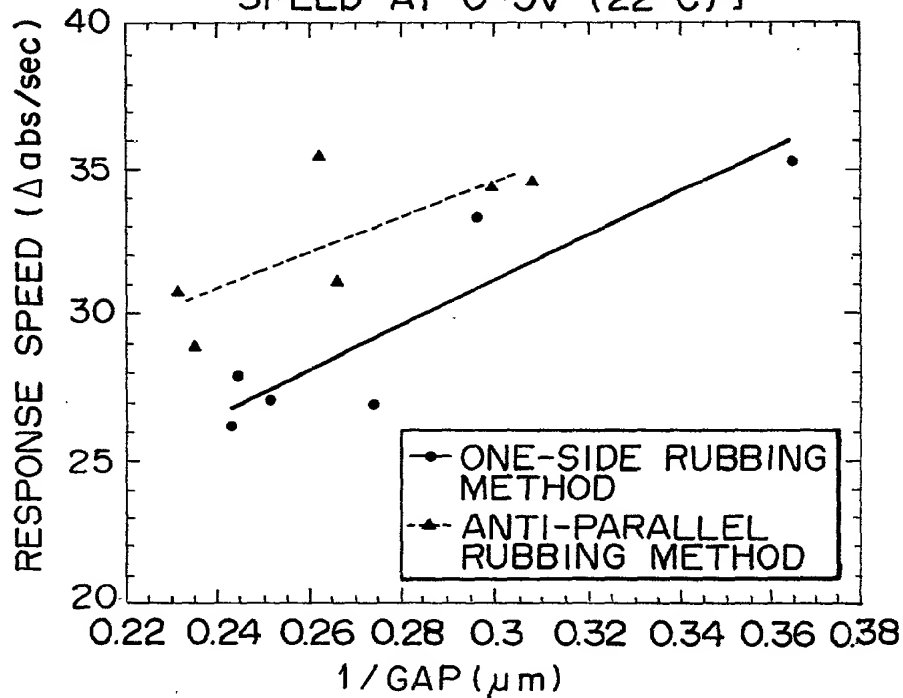


FIG. 8C

[COMPARISON IN RESPONSE
SPEED AT 2-3V (65°C)]

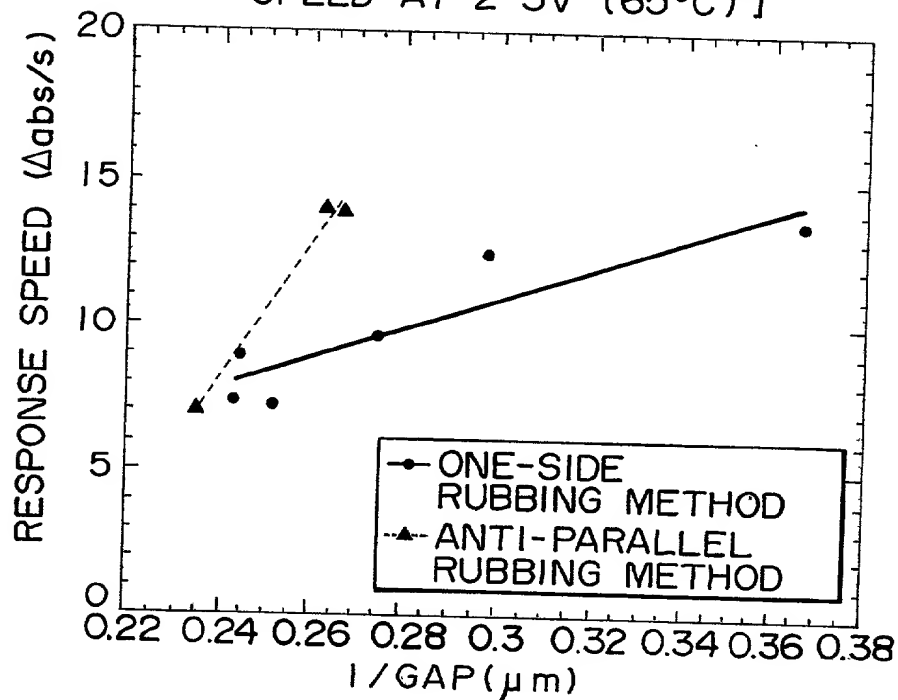


FIG. 8D

[COMPARISON IN RESPONSE
SPEED AT 0-5V (65°C)]

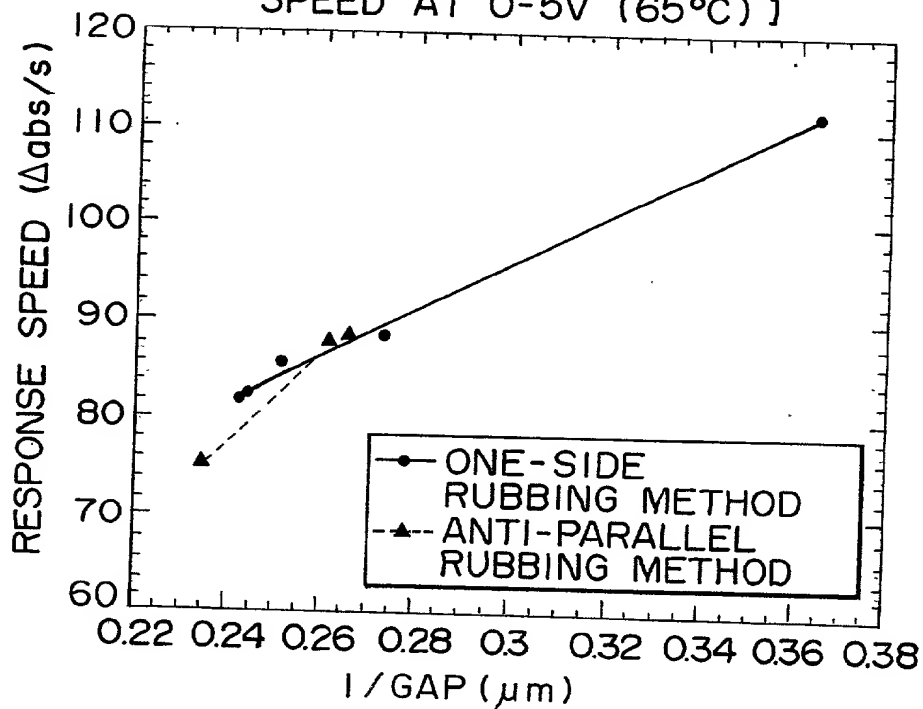


FIG. 9

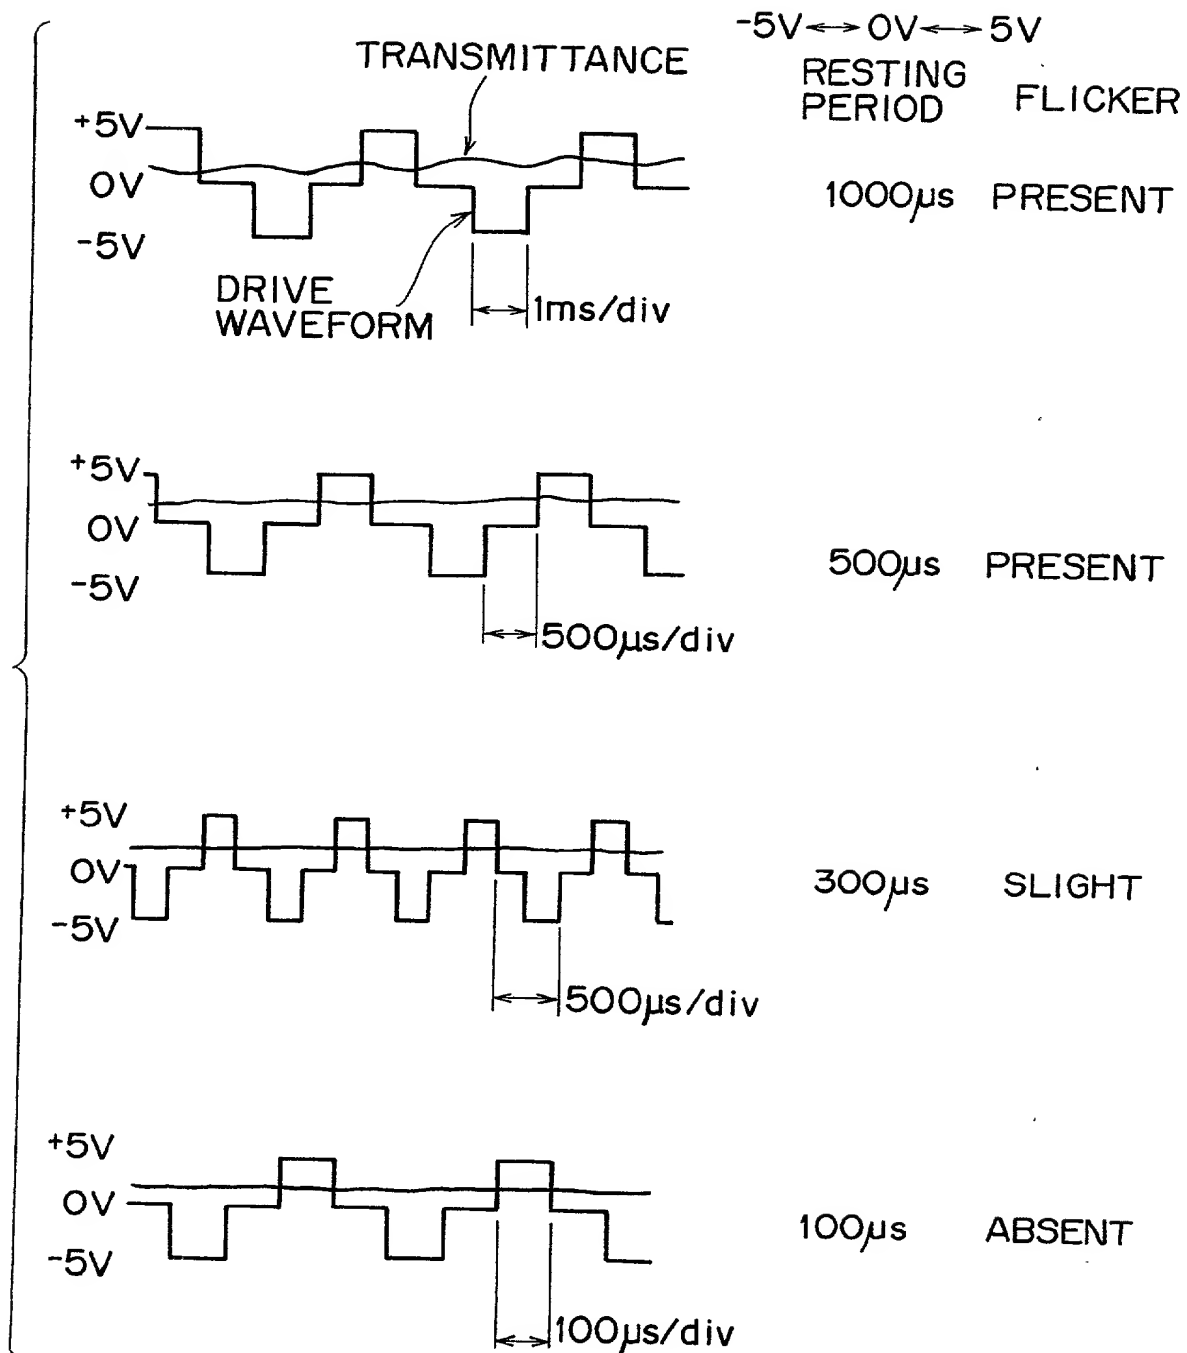


FIG. 10

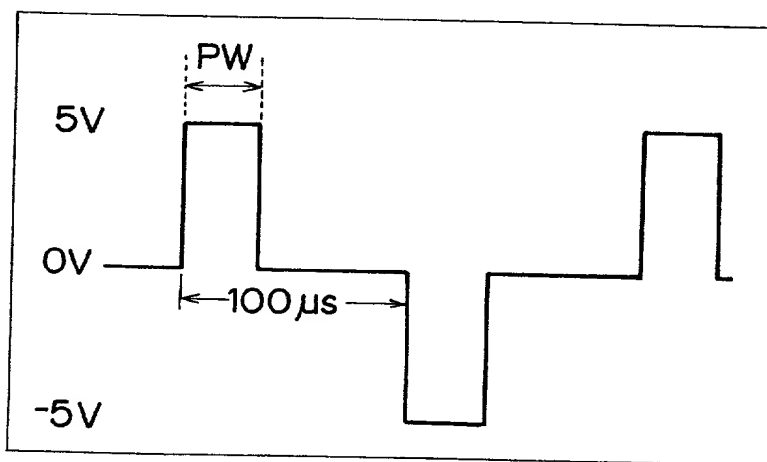
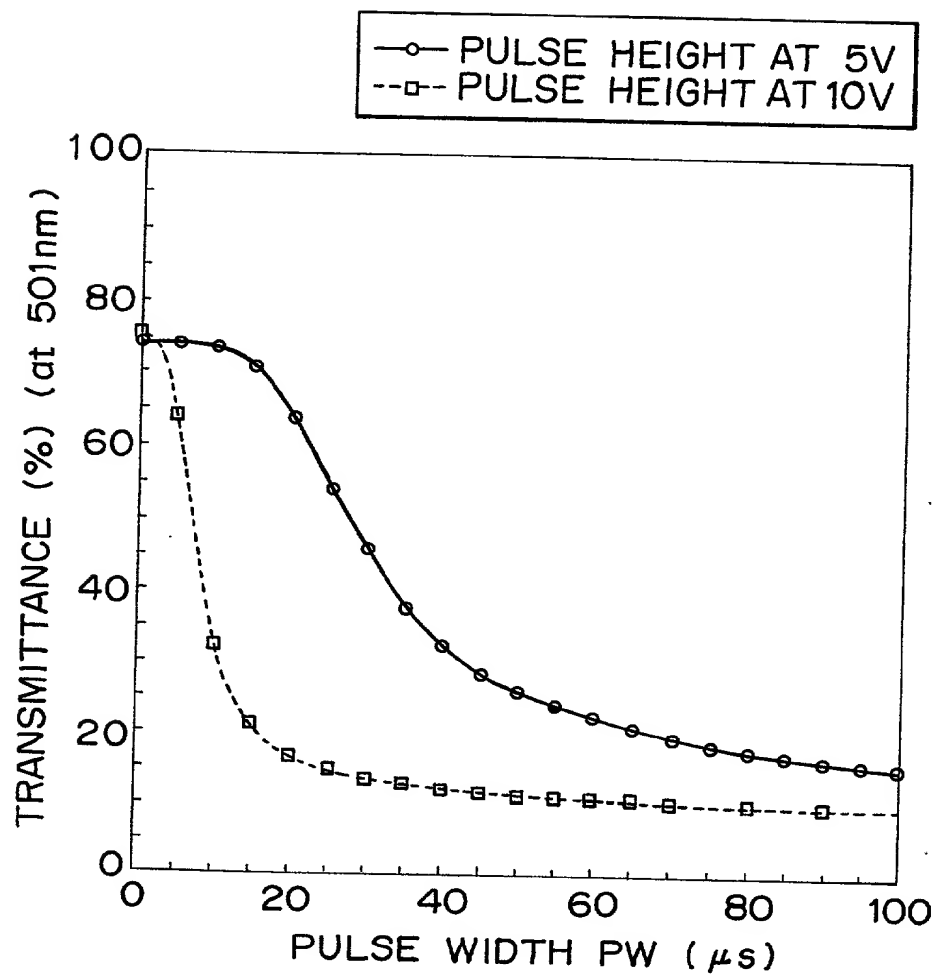


FIG. 11A

MODULATION OF PULSE WIDTH


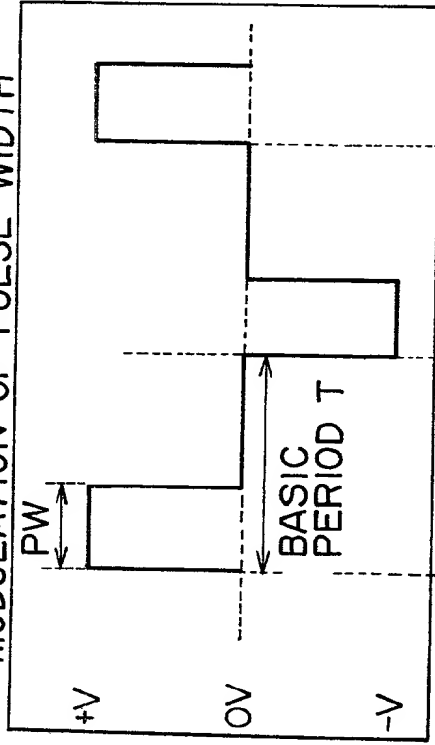


FIG. 11B

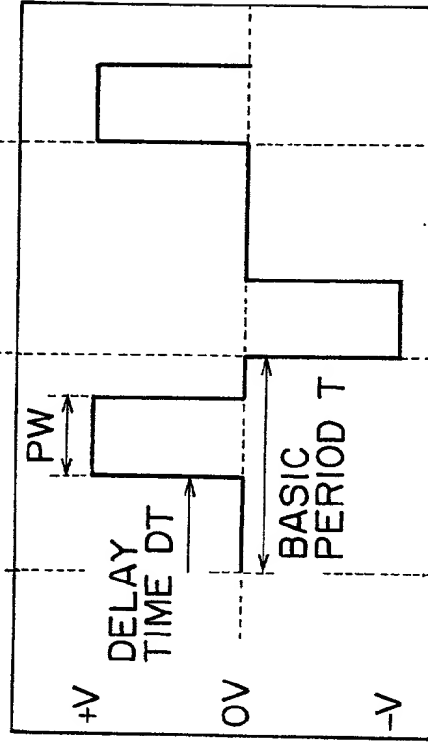

EQUIVALENT WAVEFORM

FIG. 11C

MODULATION OF PULSE DENSITY


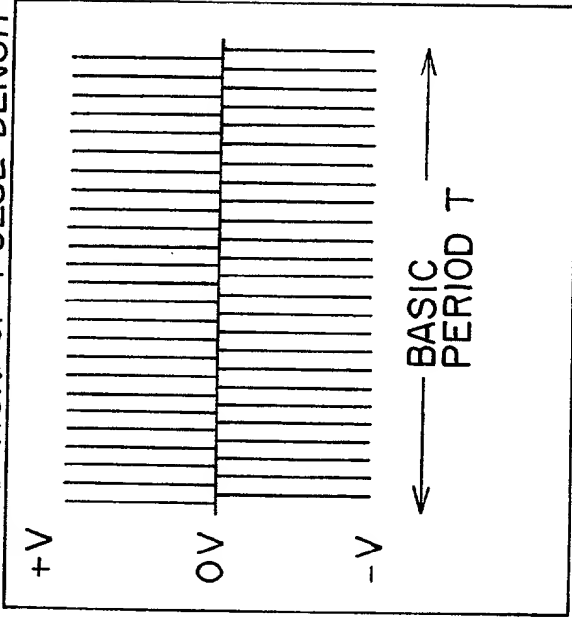


FIG. 12

RELAXATION OF RESPONSE
CHARACTERISTIC OF
NEGATIVE LIQUID CRYSTAL

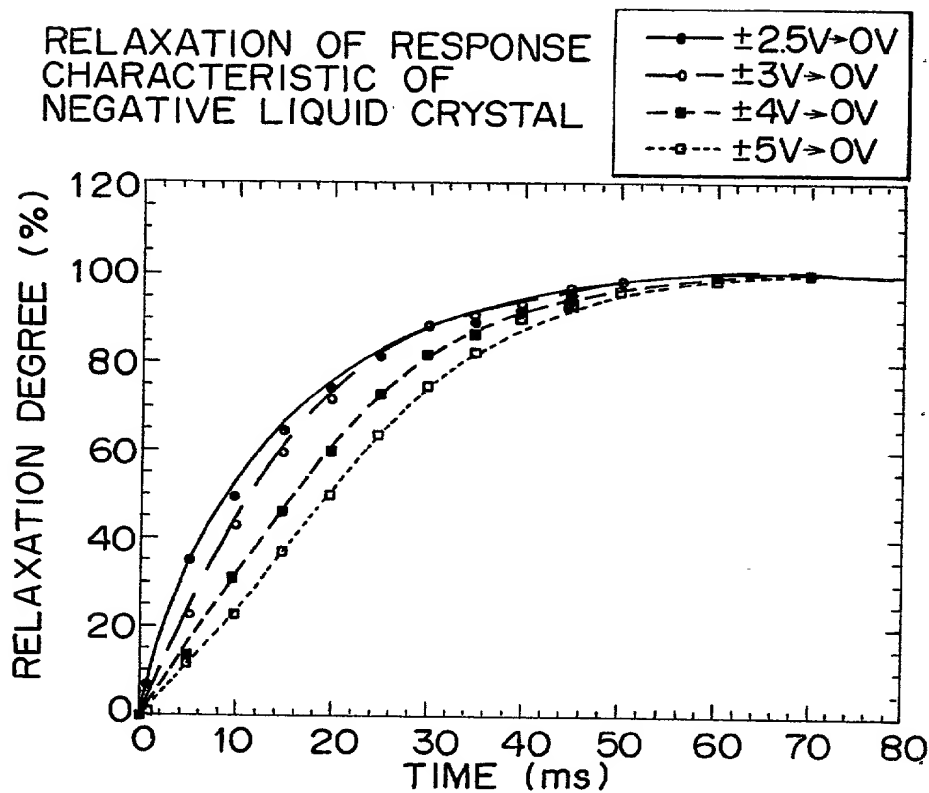

RELATION STAGE	LINEAR TERM		NON-LINEAR TERM	
	R_1	τ_1	R_2	τ_2
2.5V→0V	100 %	14.2ms	0 %	
3V→0V	78 %	15.8ms	22 %	17.6ms
4V→0V	56 %	20.4ms	44 %	21.9ms
5V→0V	39 %	19.7ms	61 %	26.9ms

FIG.13A

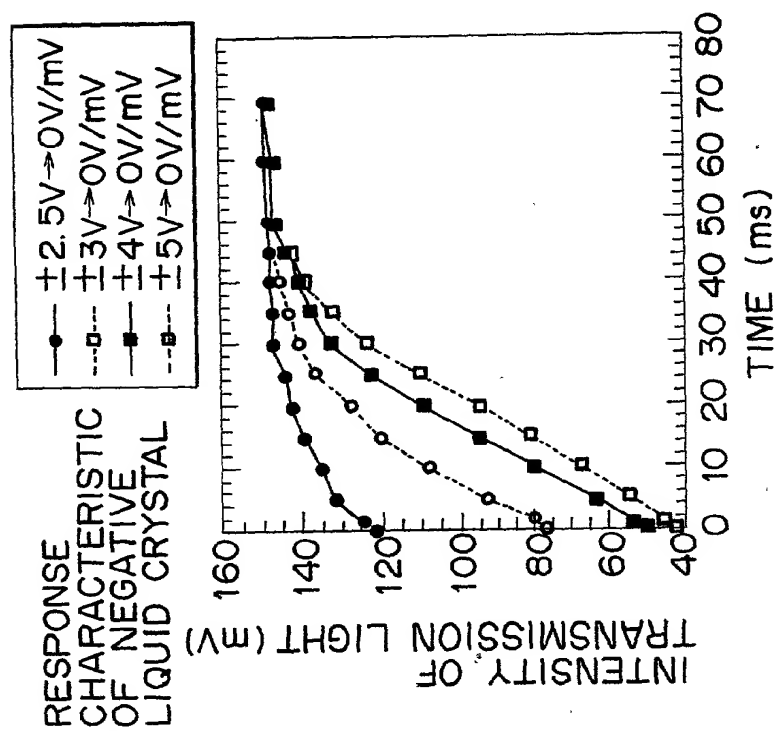


FIG.13B

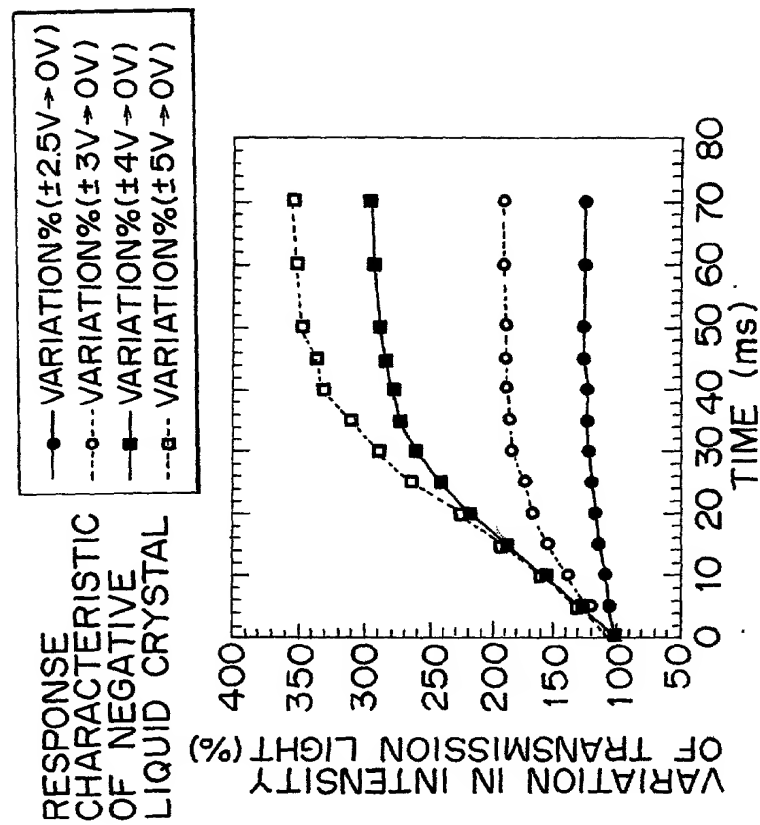


FIG. 13C

RESPONSE
CHARACTERISTIC
OF NEGATIVE
LIQUID CRYSTAL

- - - - VARIATION % ($\pm 2.5V \rightarrow 0V$)
 - - - - VARIATION % ($\pm 3V \rightarrow 0V$)
 - - - - VARIATION % ($\pm 4V \rightarrow 0V$)
 ——— VARIATION % ($+ 5V \rightarrow 0V$)

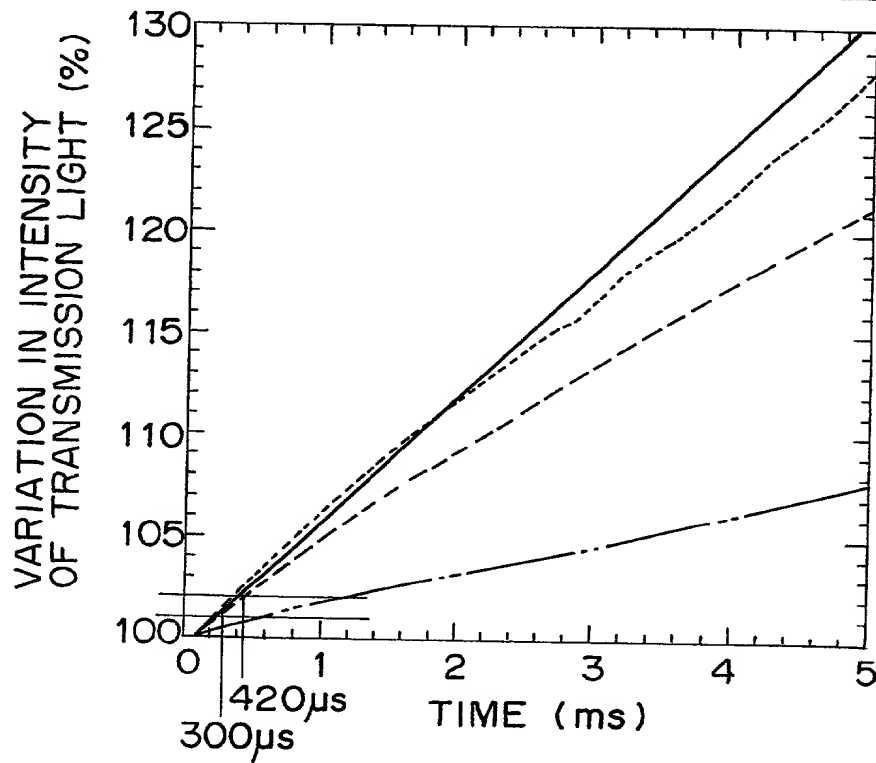


FIG. 14

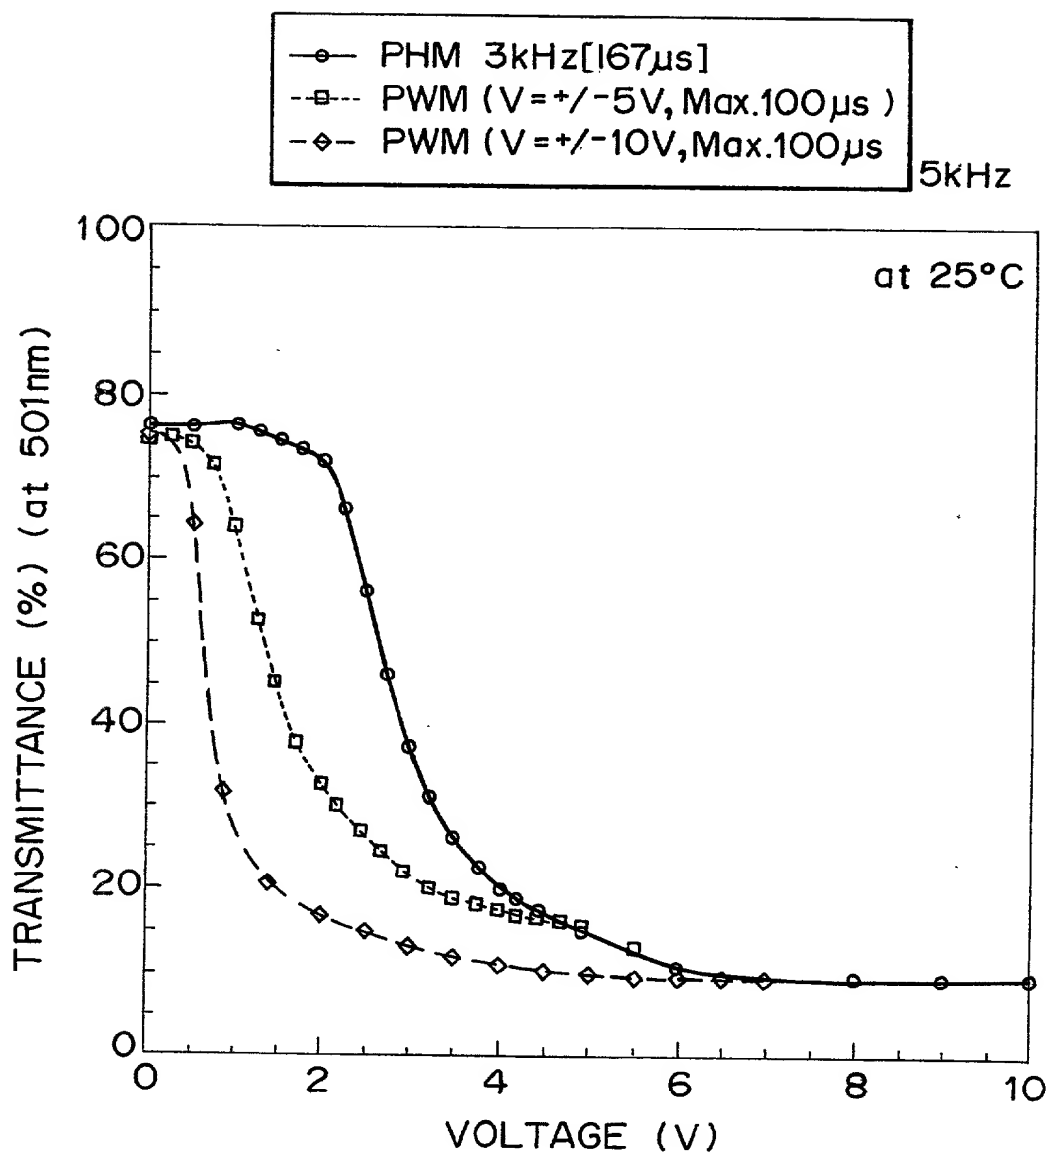


FIG. 15

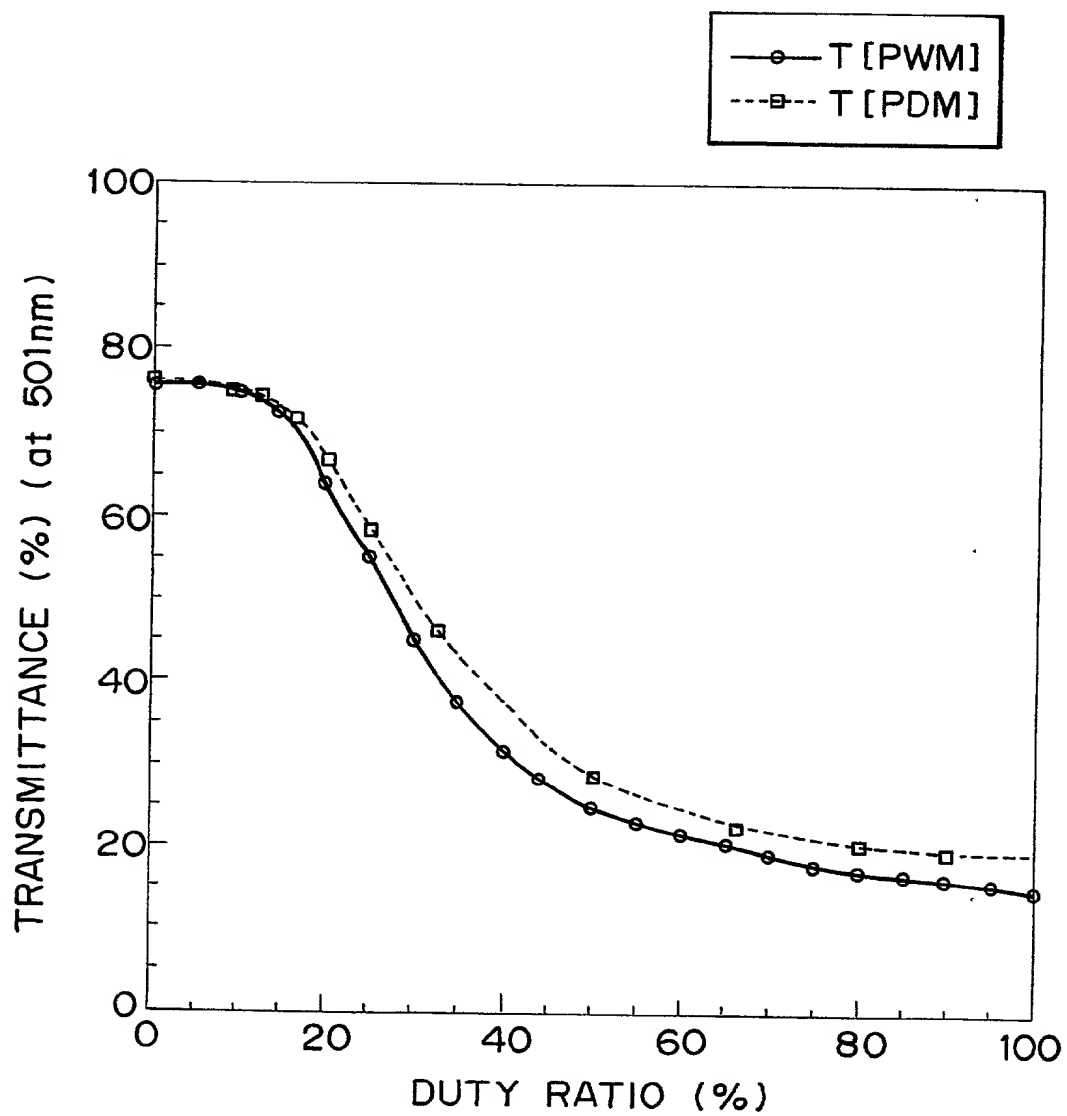


FIG. 16A




FIG. 16B

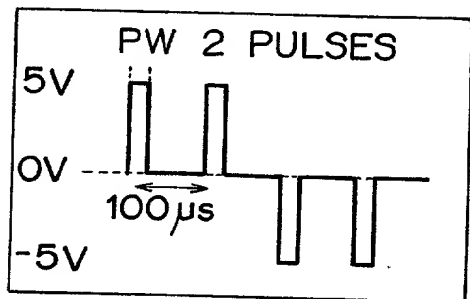


FIG. 16C

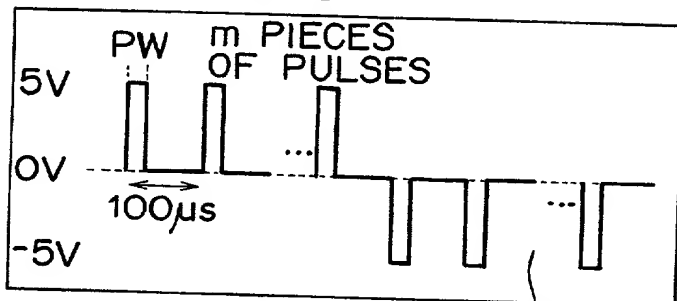


FIG. 16D

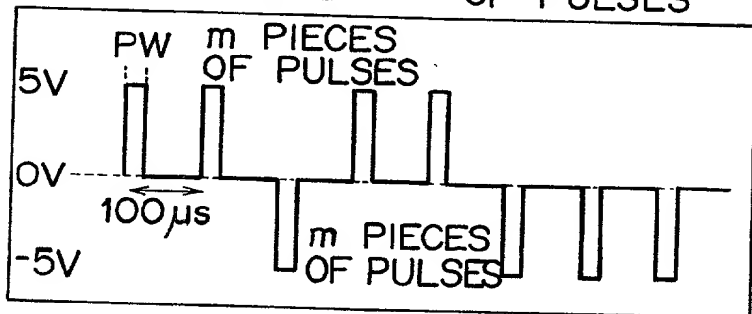


FIG. 16E NUMBER OF SYMMETRIC PULSES

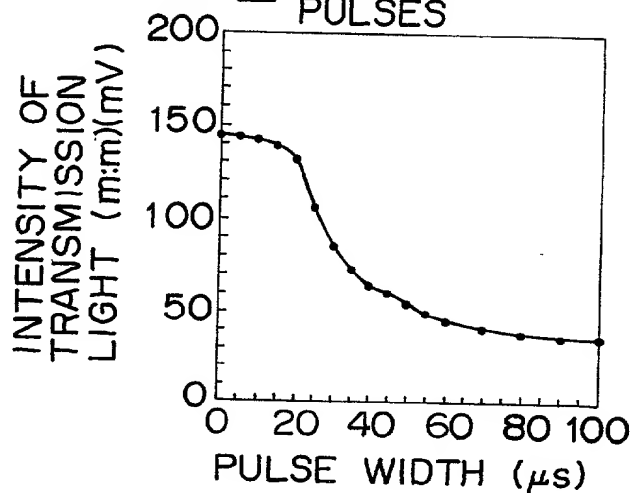


FIG. 17






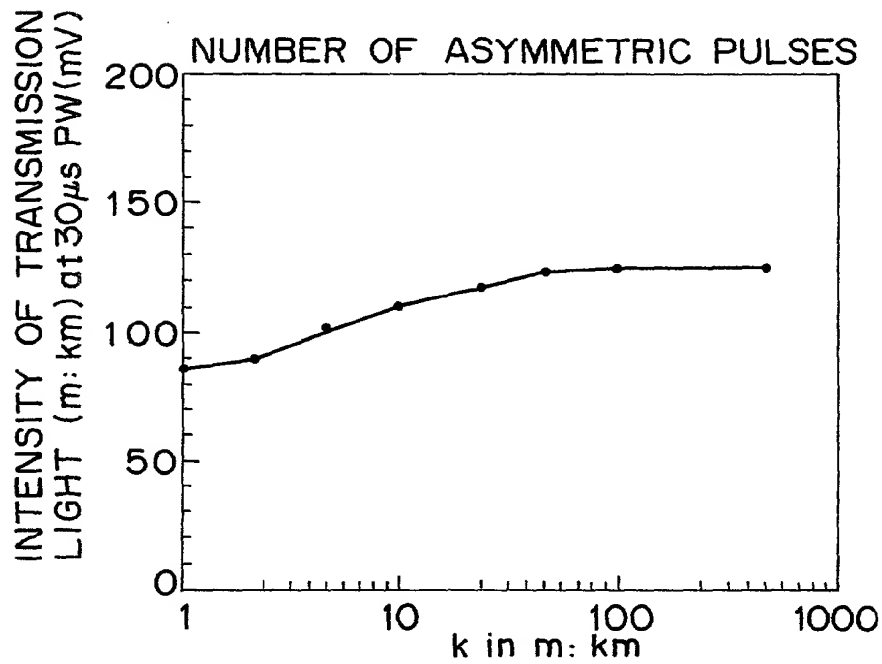


FIG. 18A

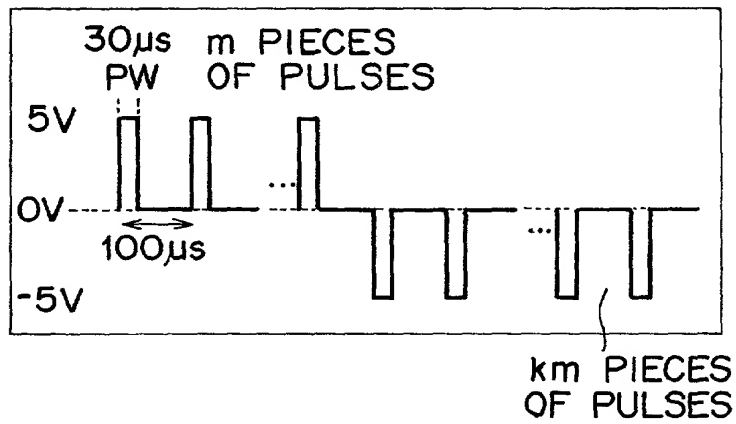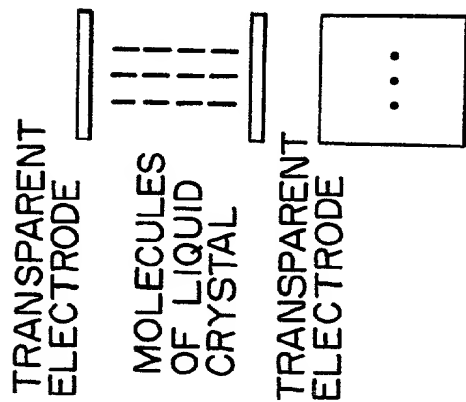



RUBBING
TREATMENT



TILTED IN
DIFFERENT
DIRECTIONS

FIG. 18B



TRANSMITTANCE

APPLIED VOLTAGE

TILTED IN
SPECIFIC
DIRECTION




FIG. 18C

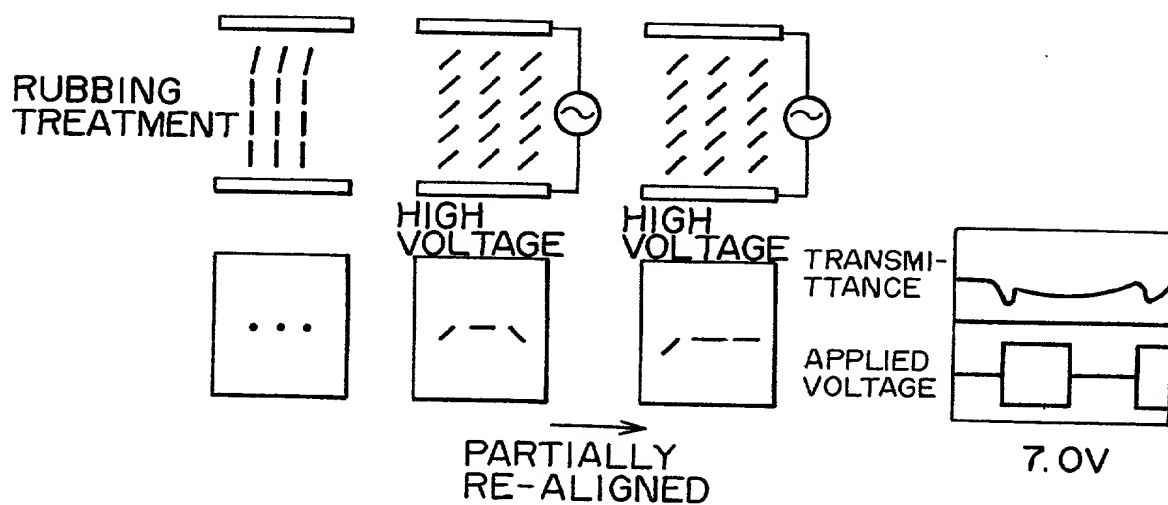


FIG. 18D

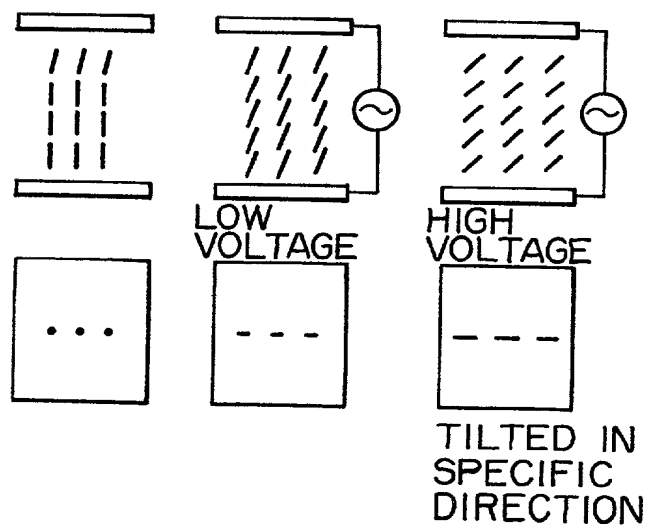


FIG. 19

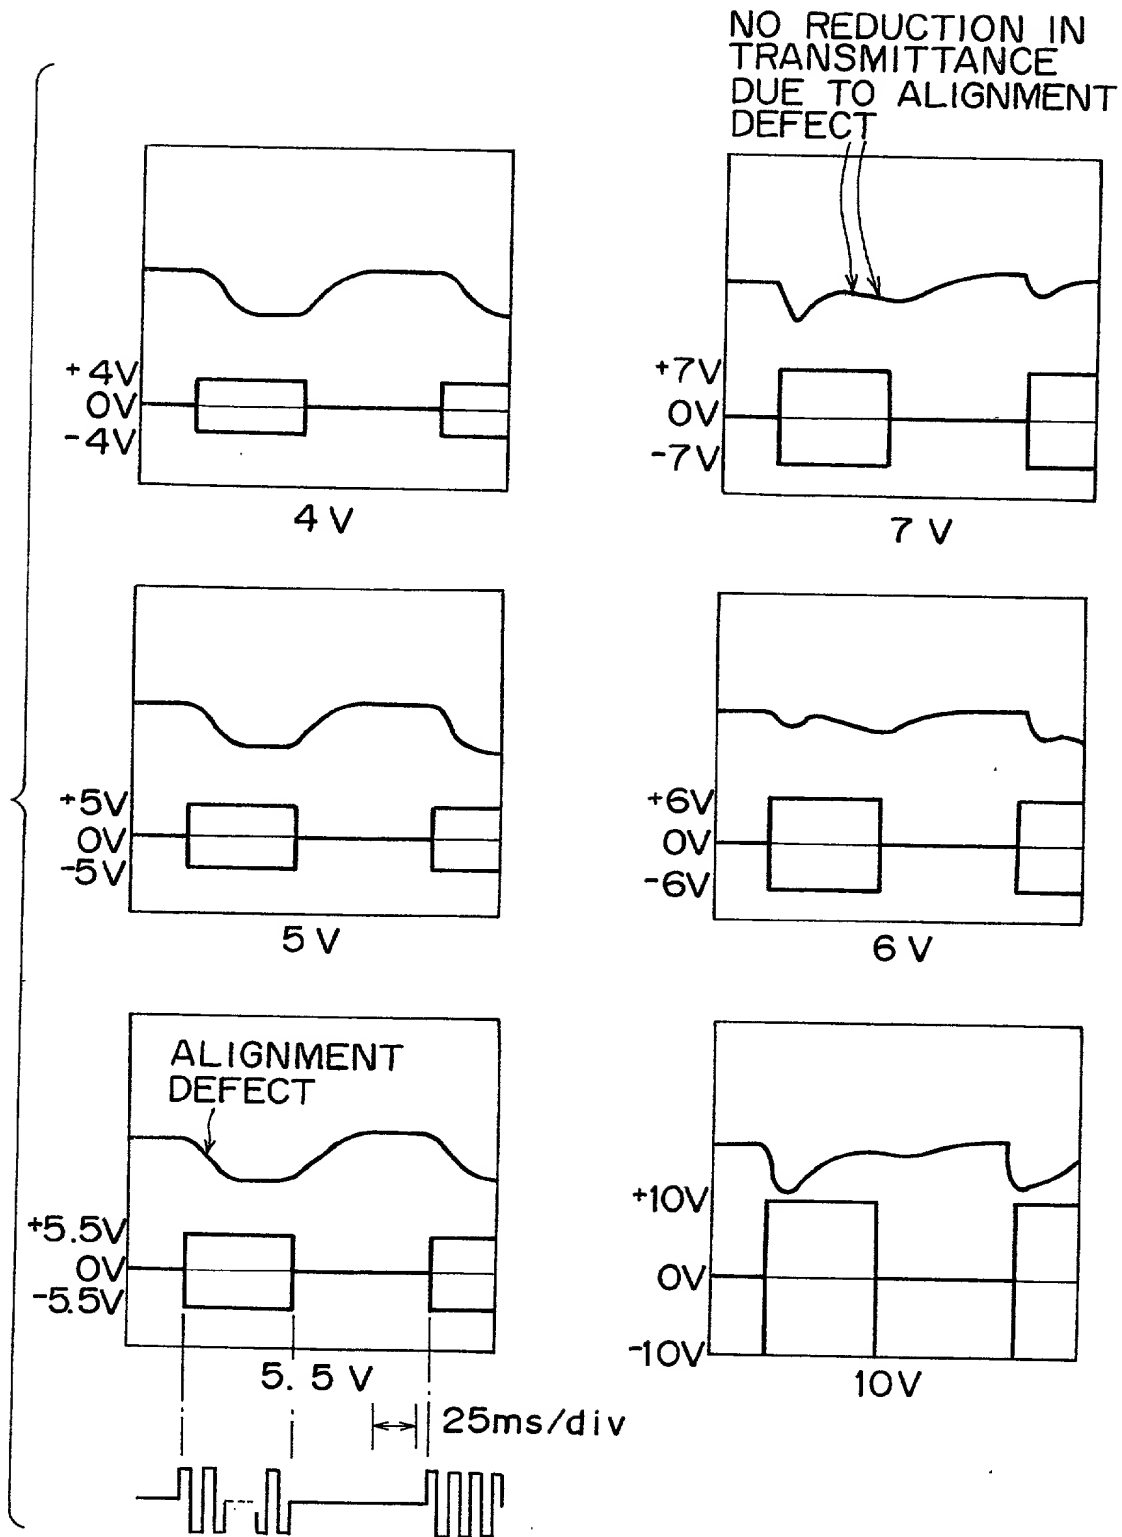


FIG. 20

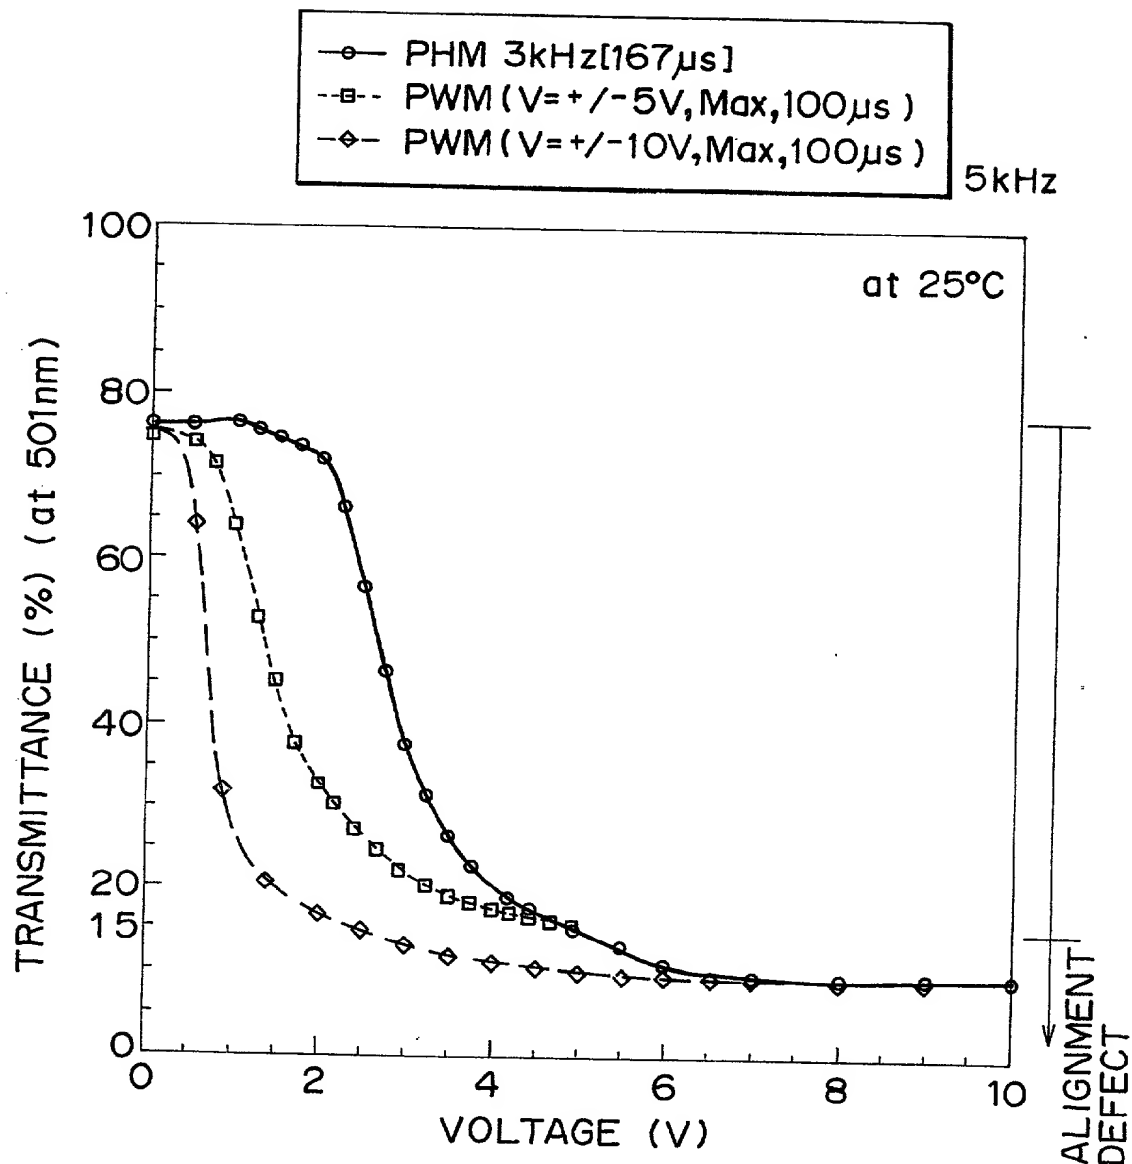


FIG. 21A

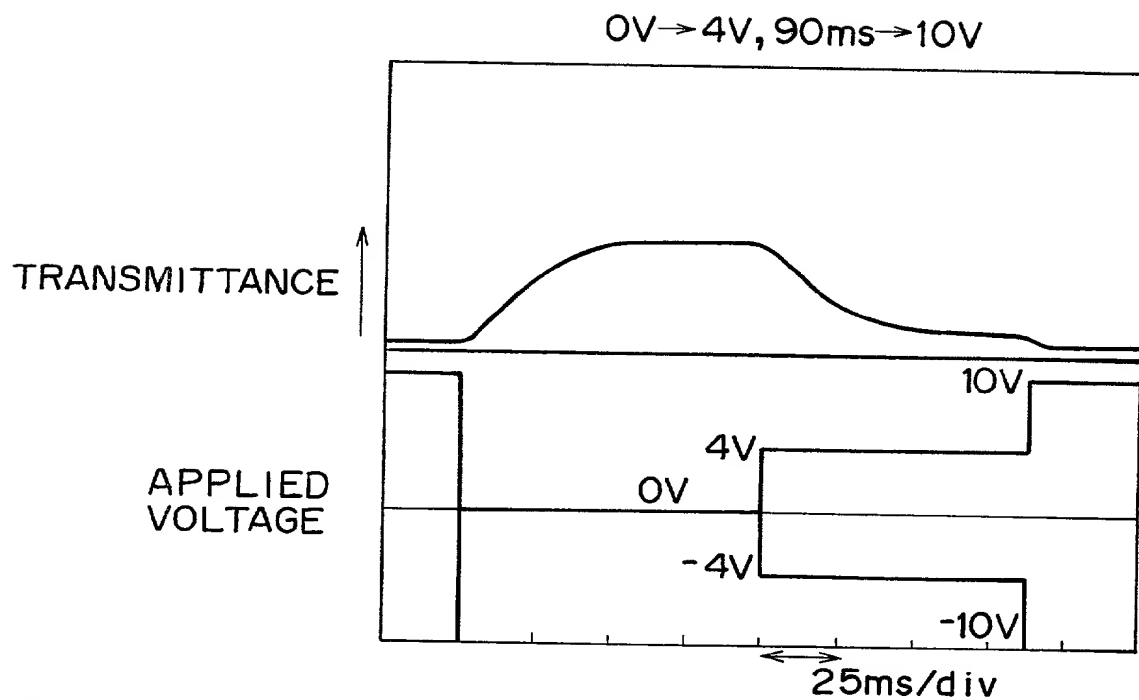


FIG. 21B

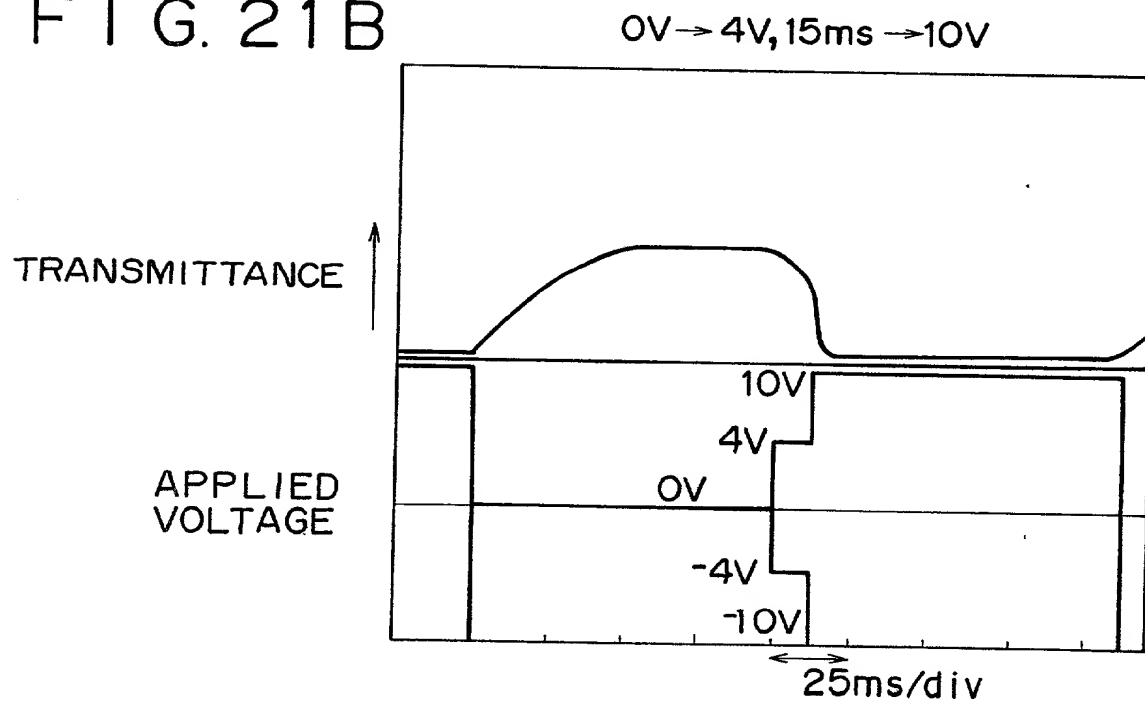


FIG. 22

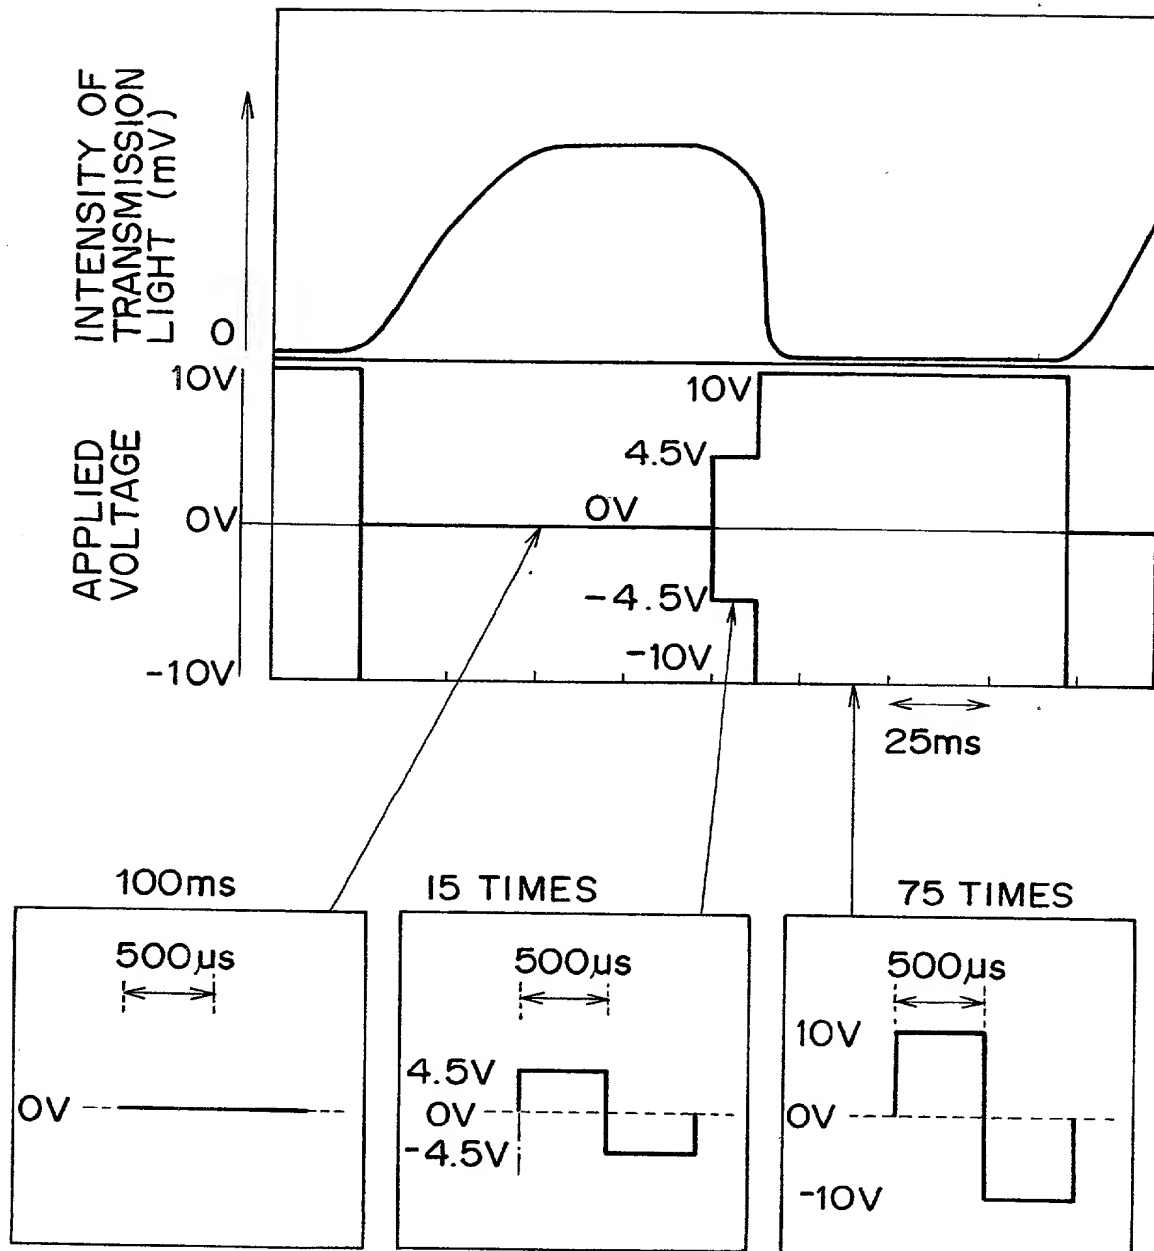


FIG.23A FIG.23B FIG.23C FIG.23D FIG.23E

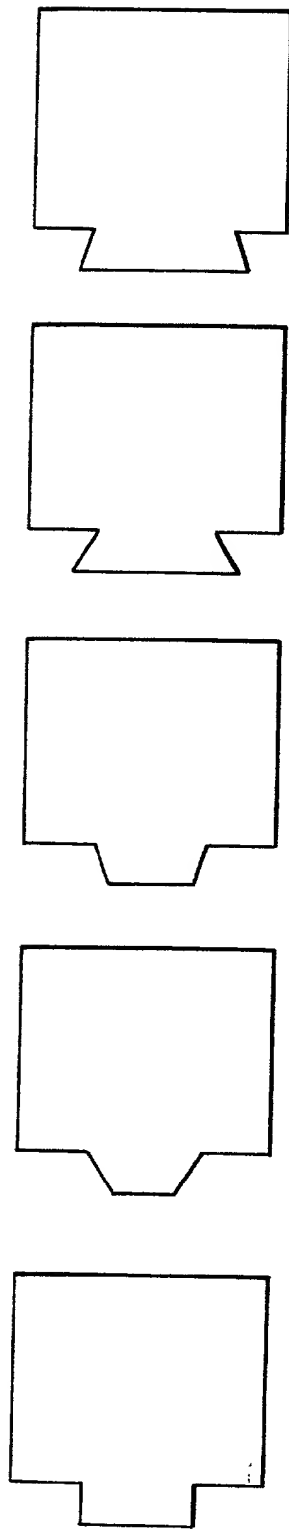


FIG. 24A

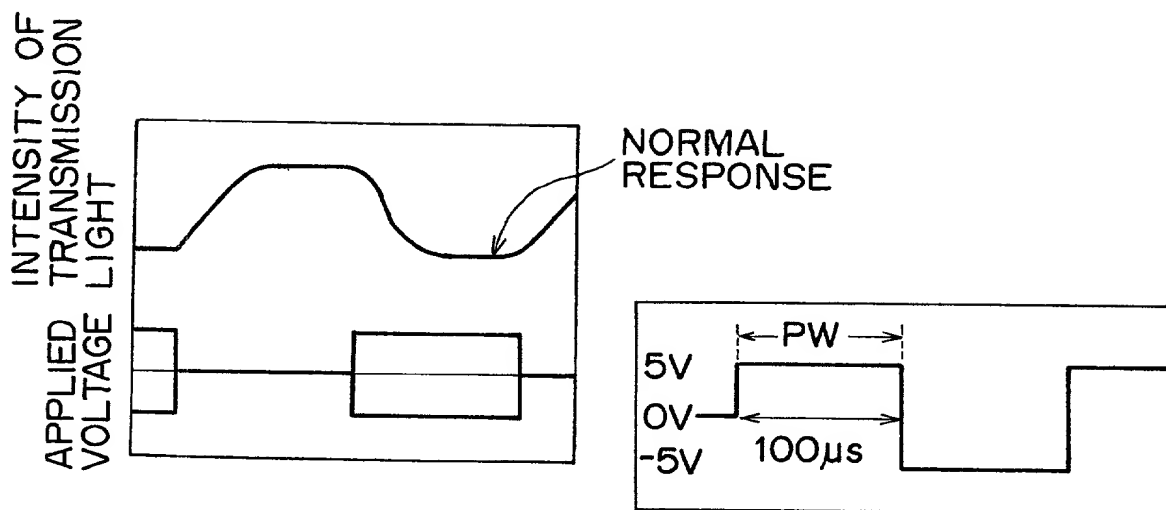


FIG. 24B

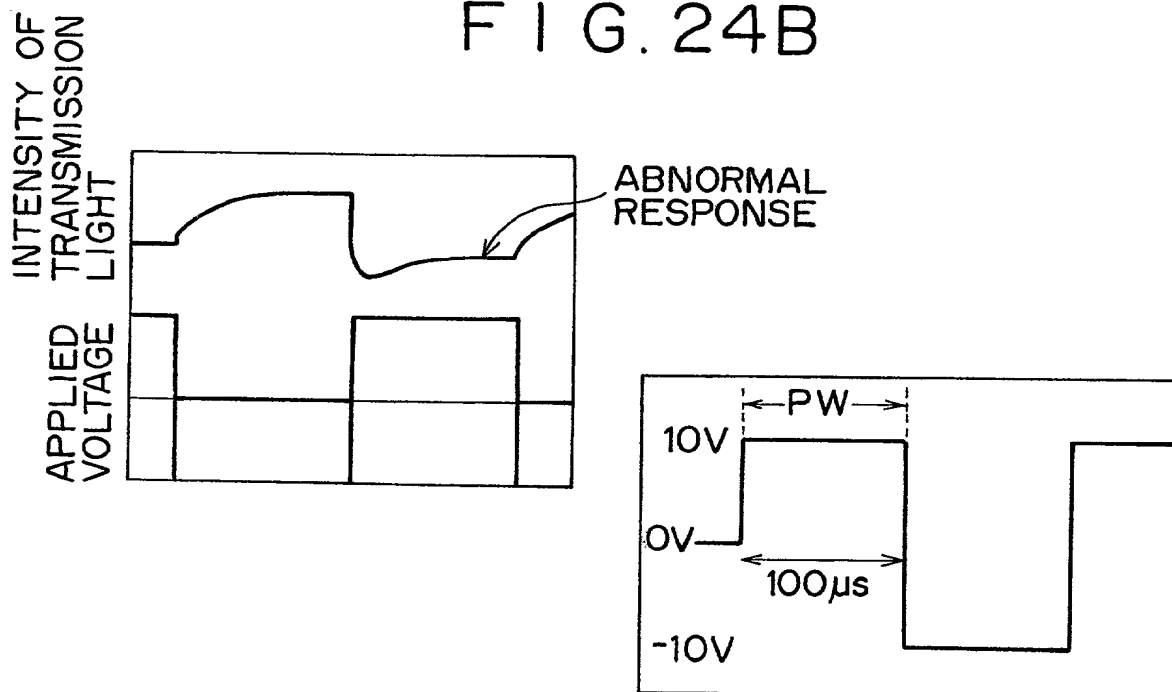


FIG. 25


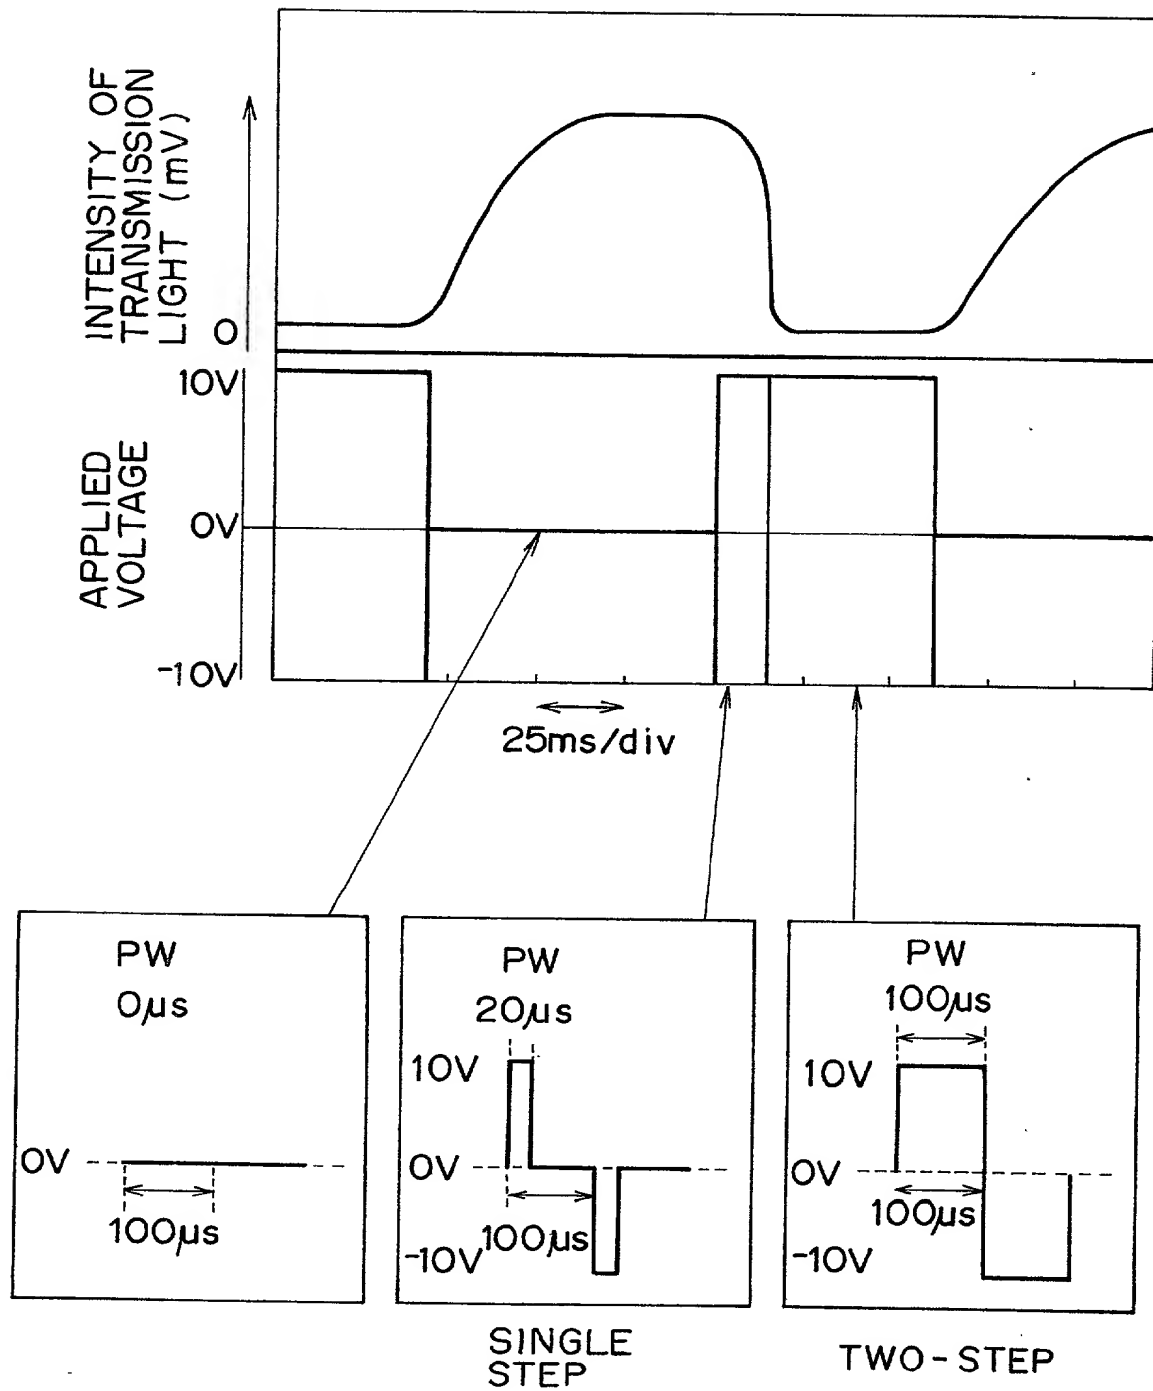


FIG. 26

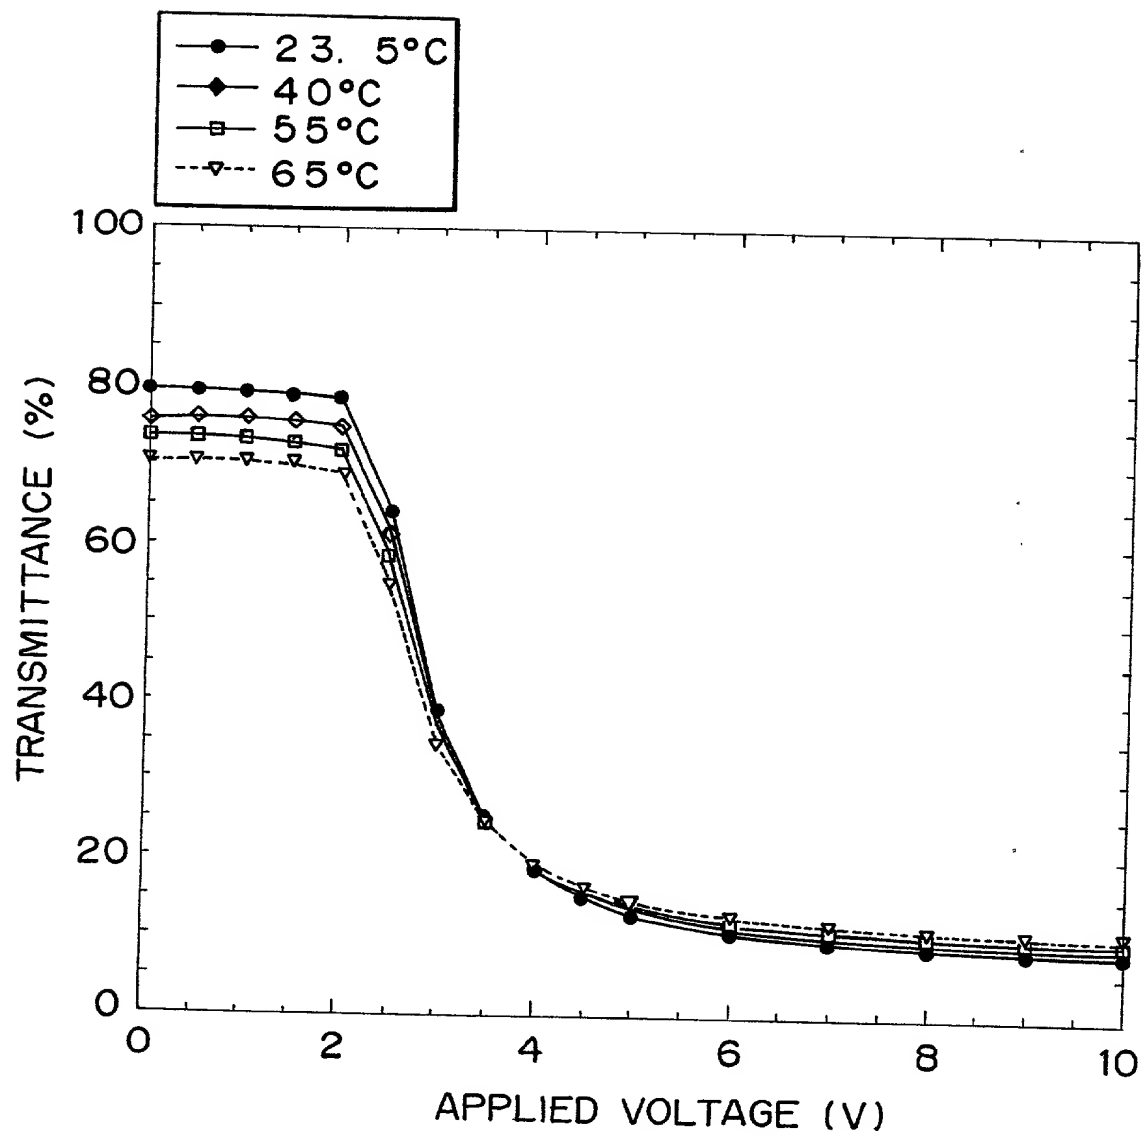

DEFECT TESTED

FIG. 27

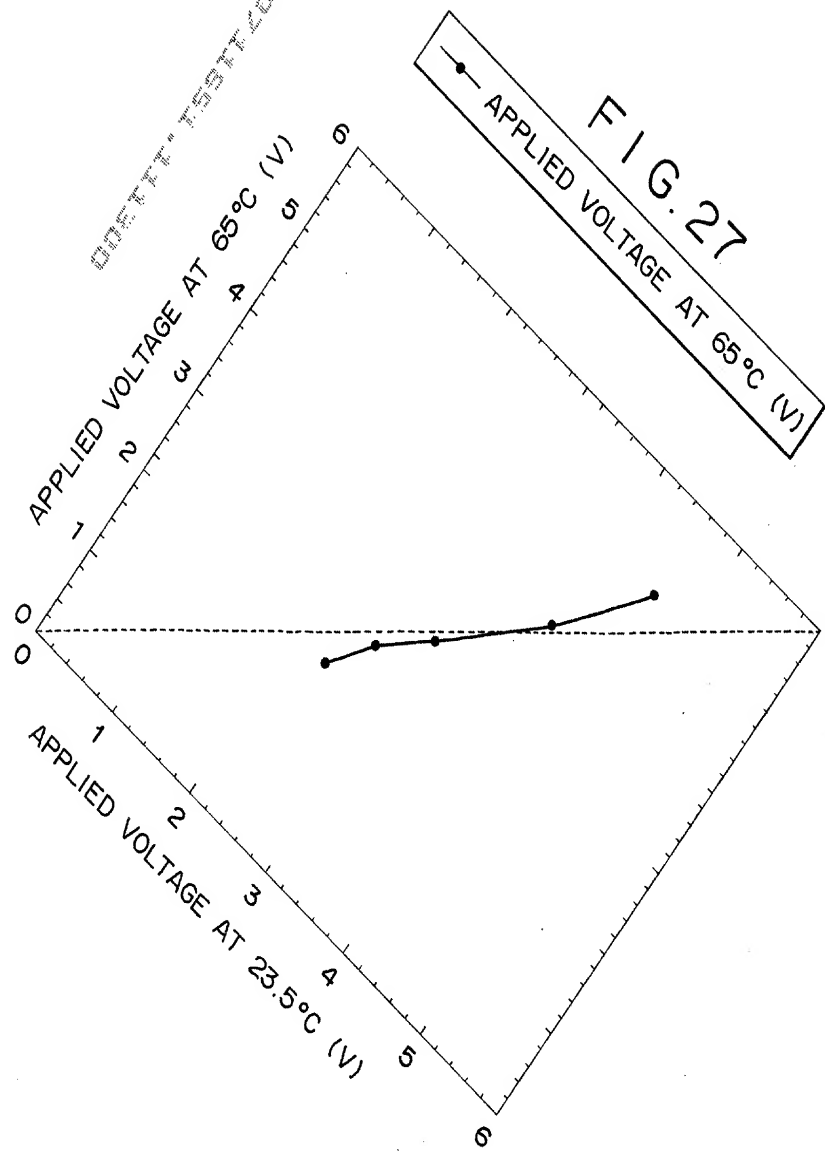


FIG. 28

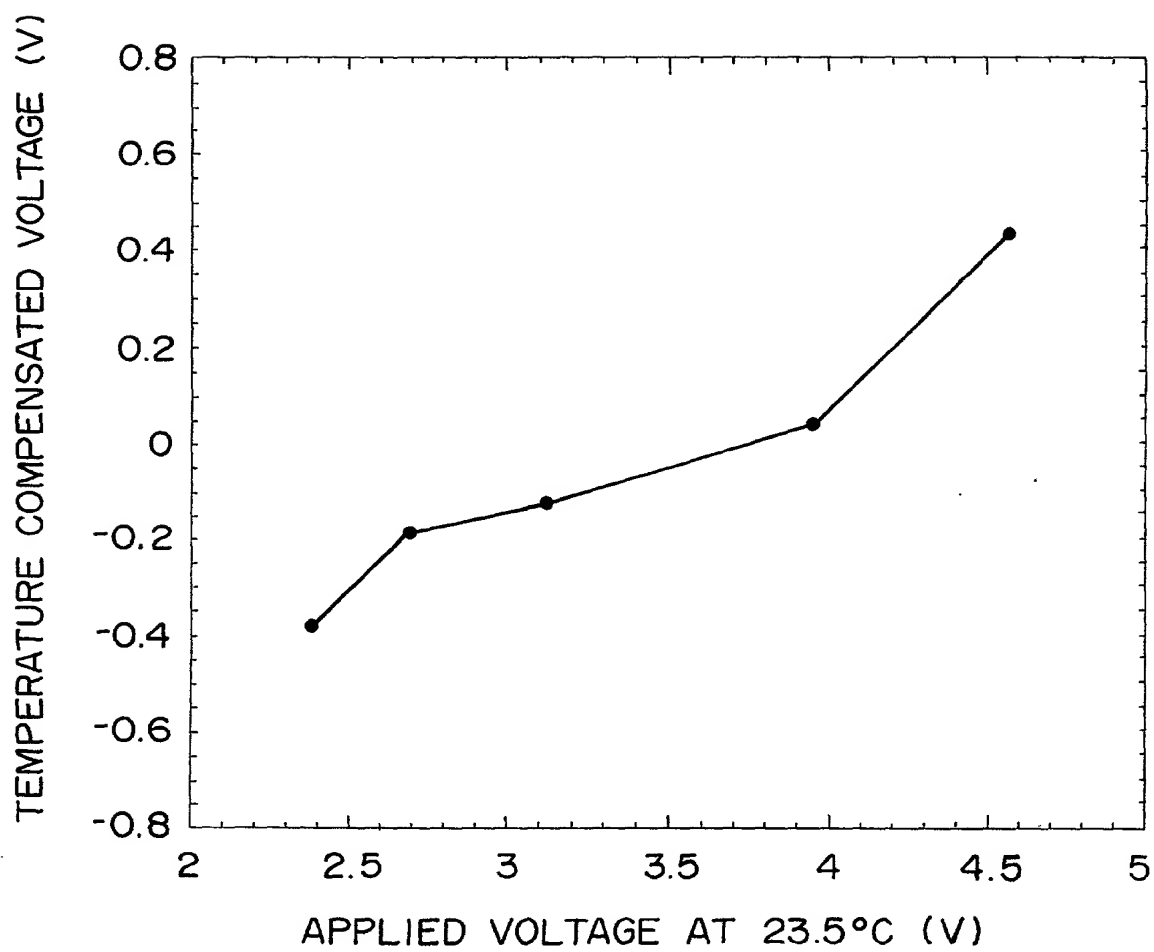


FIG. 29

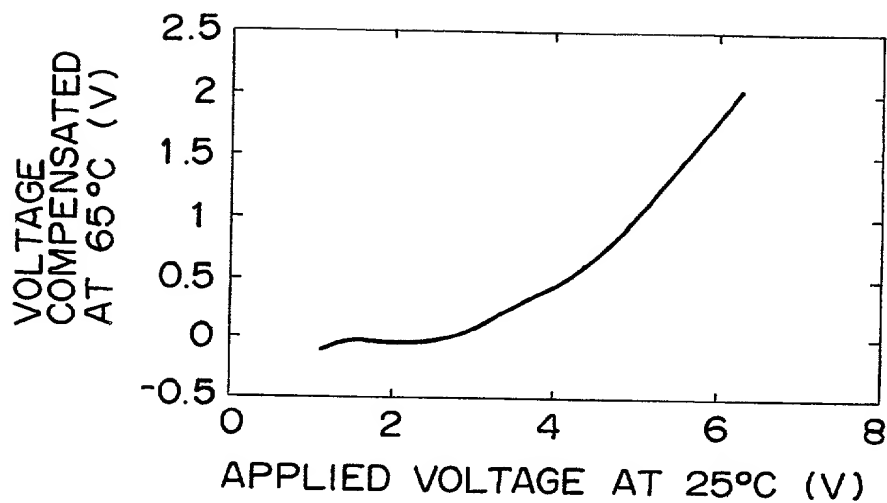


FIG. 30

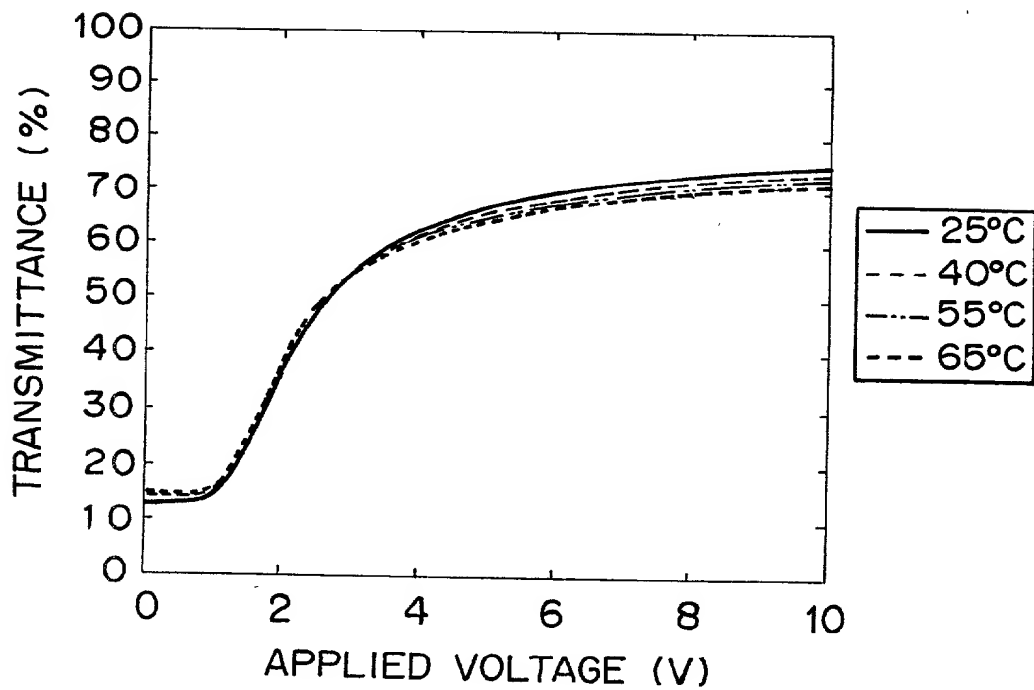


FIG. 31

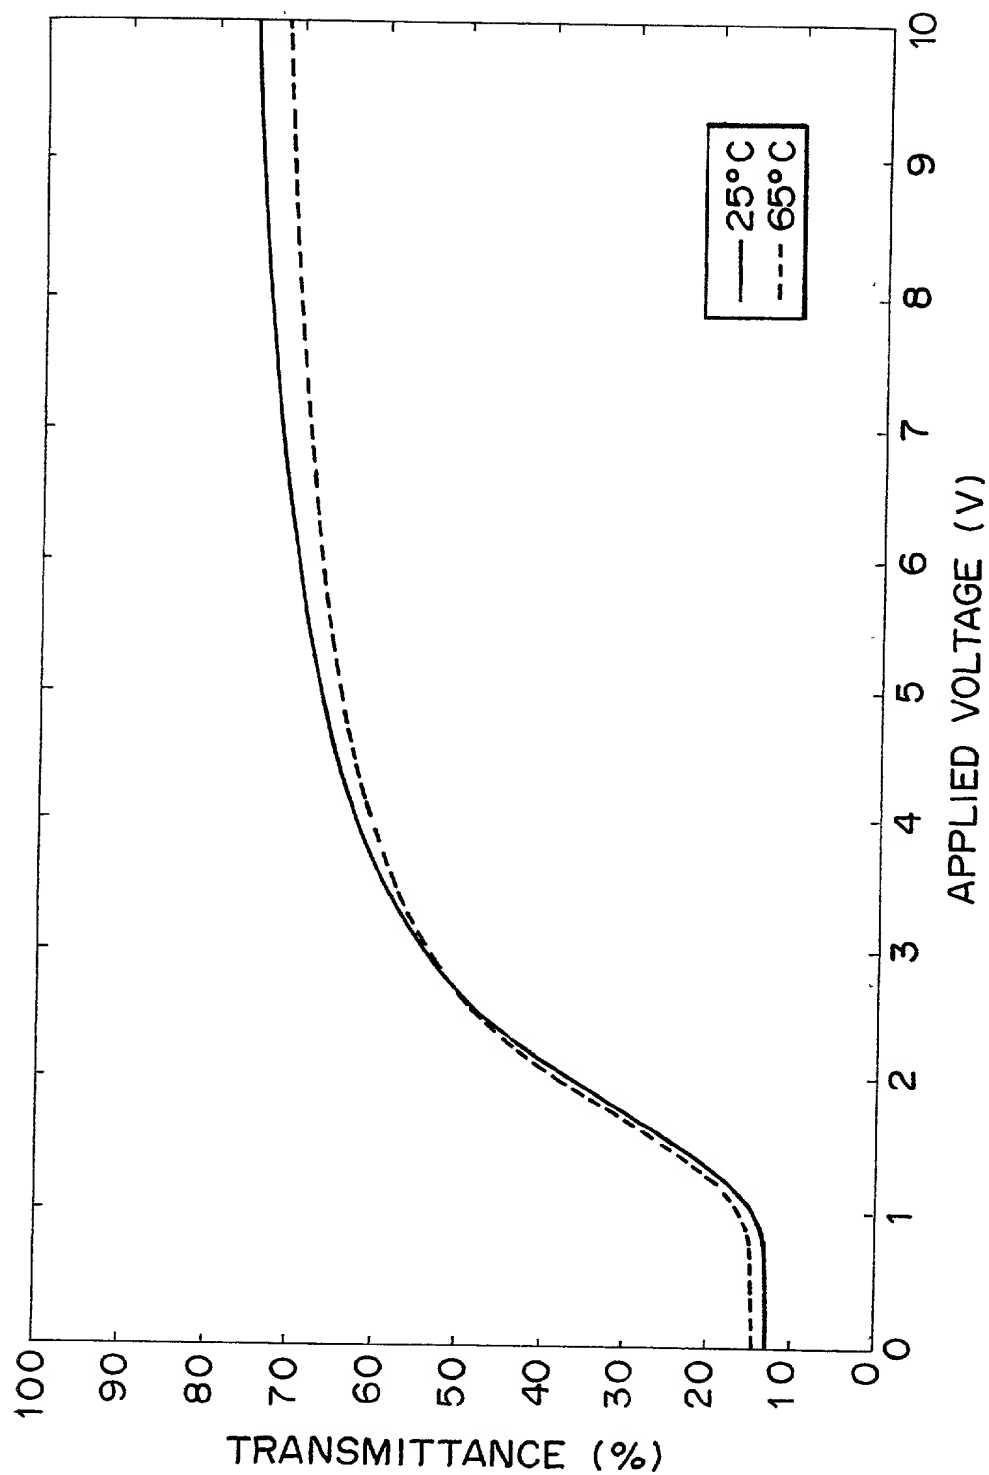


FIG. 32

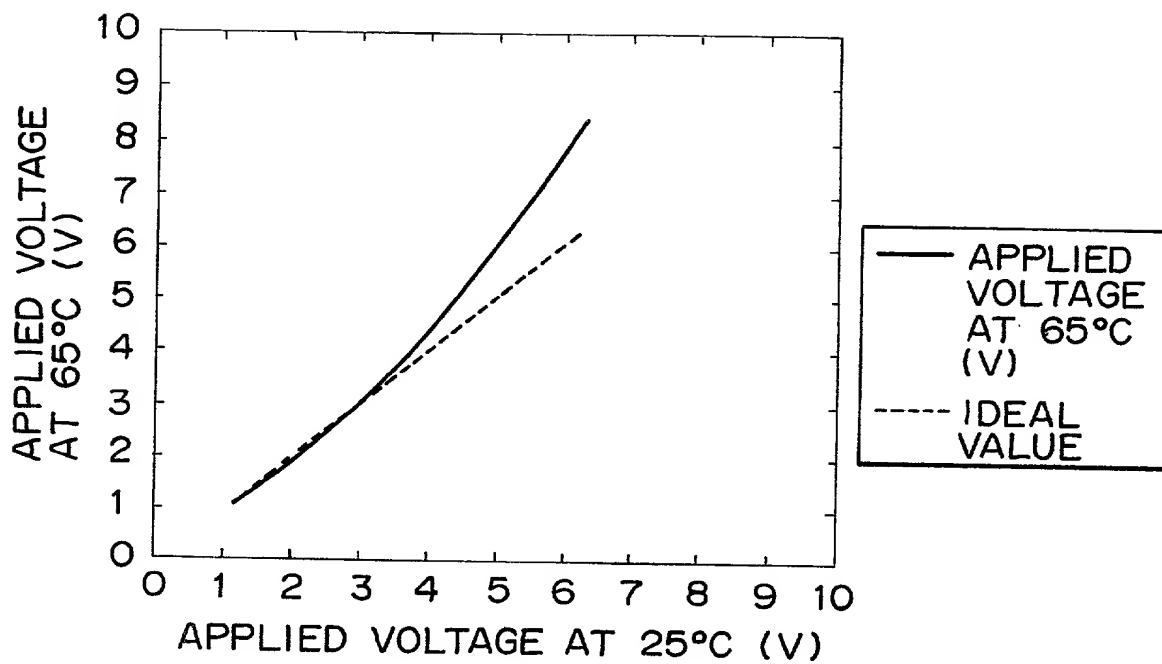


FIG. 33

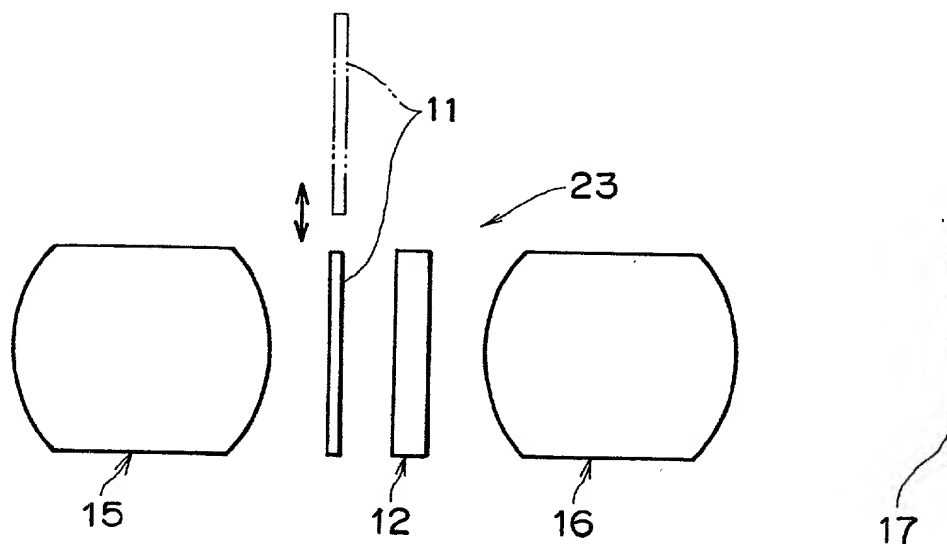


FIG. 34

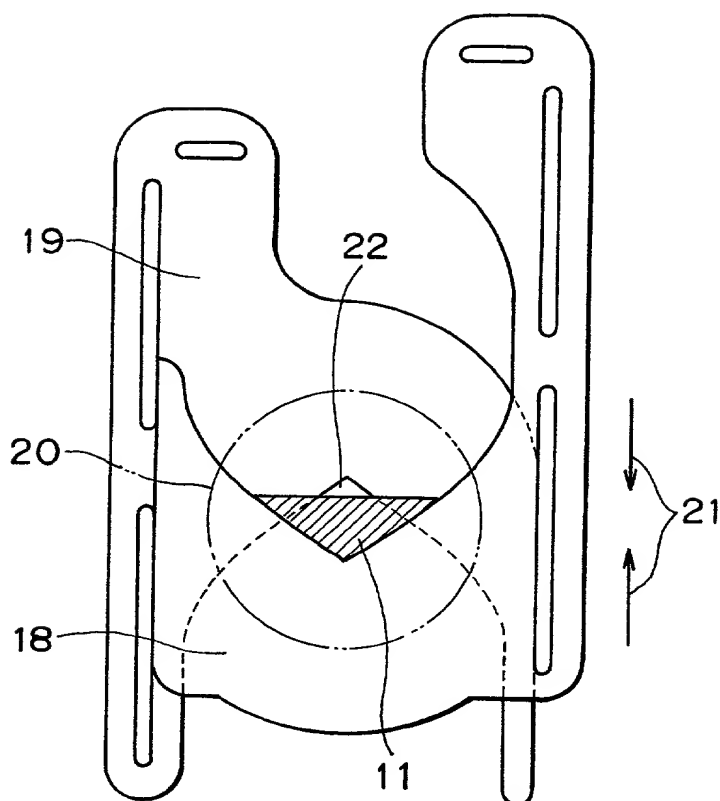


FIG. 35A

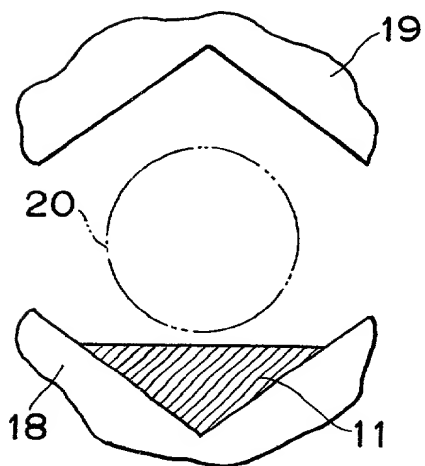


FIG. 35B FIG. 35C





FIG. 36

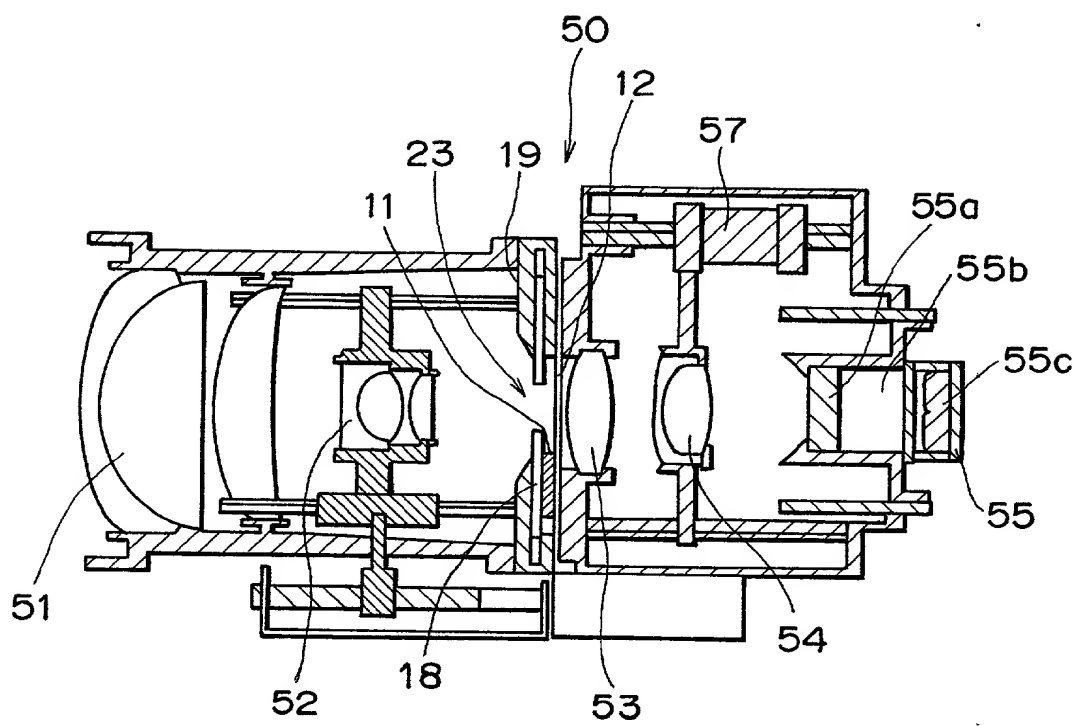


FIG. 37


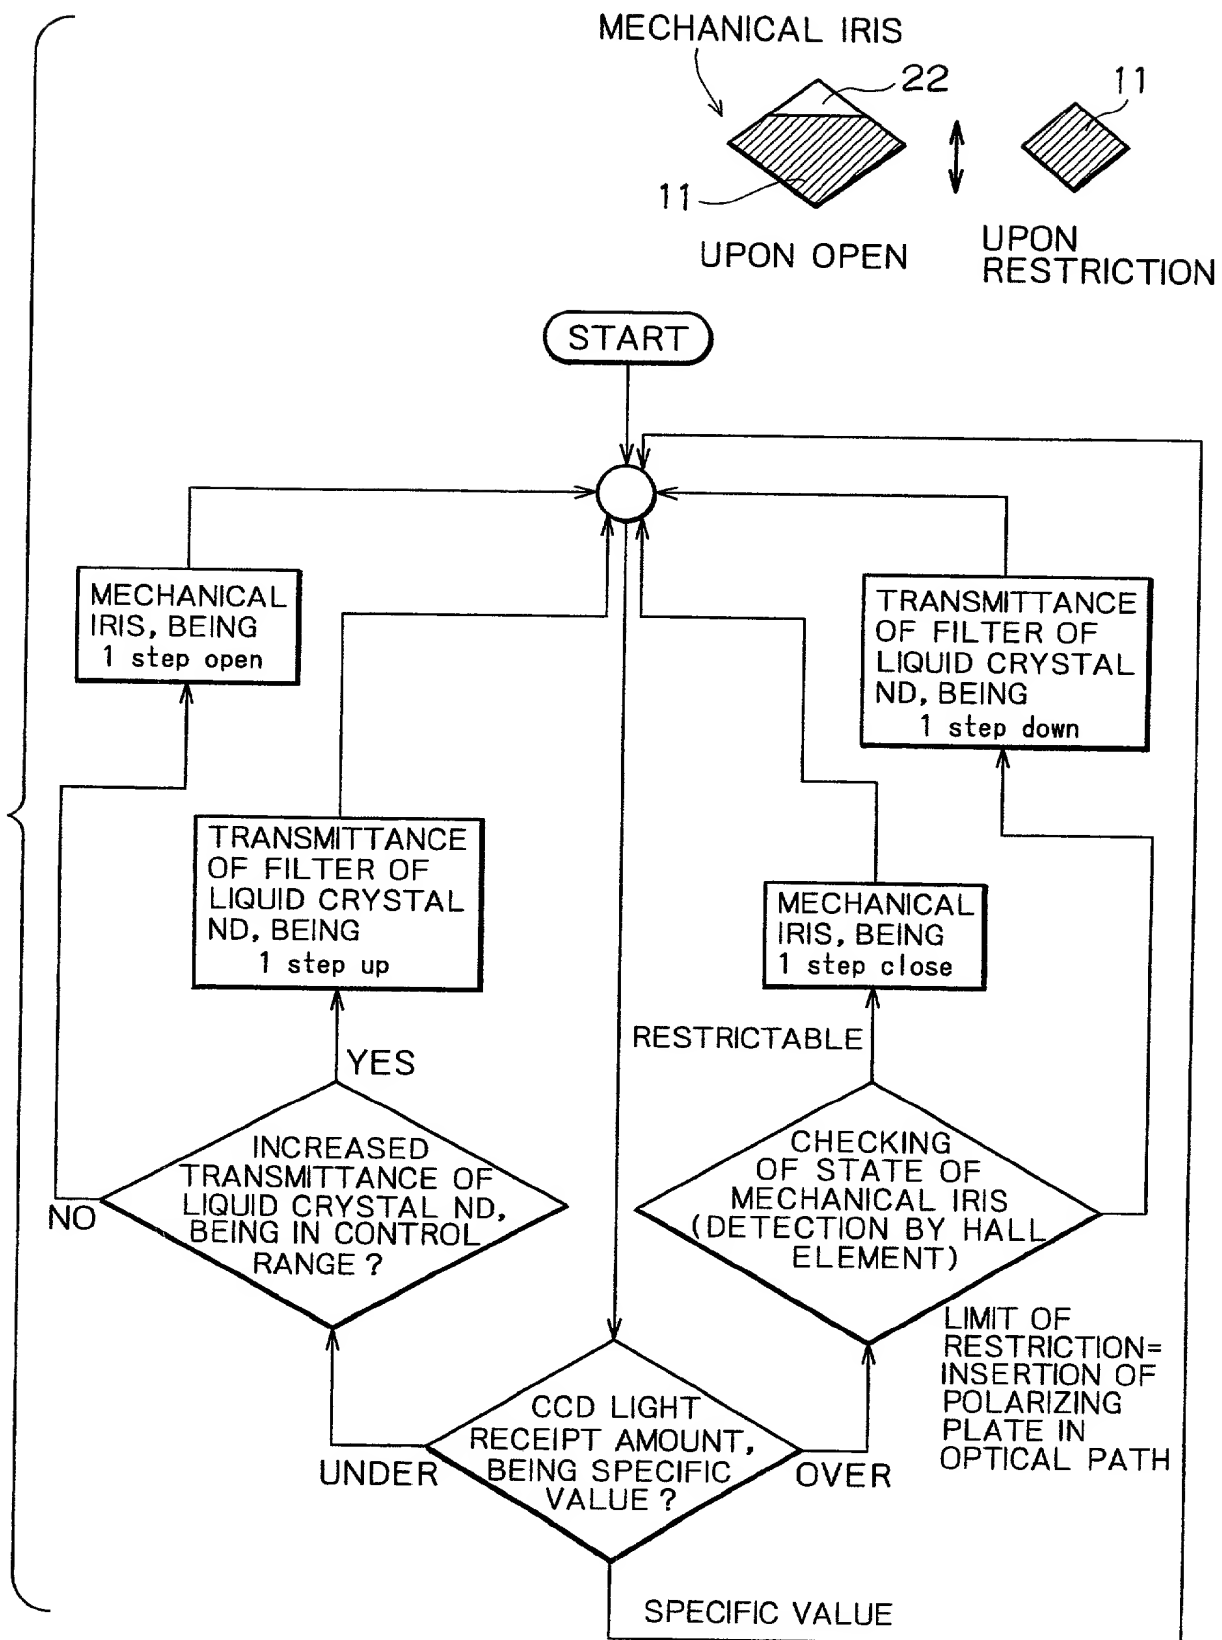


FIG. 38

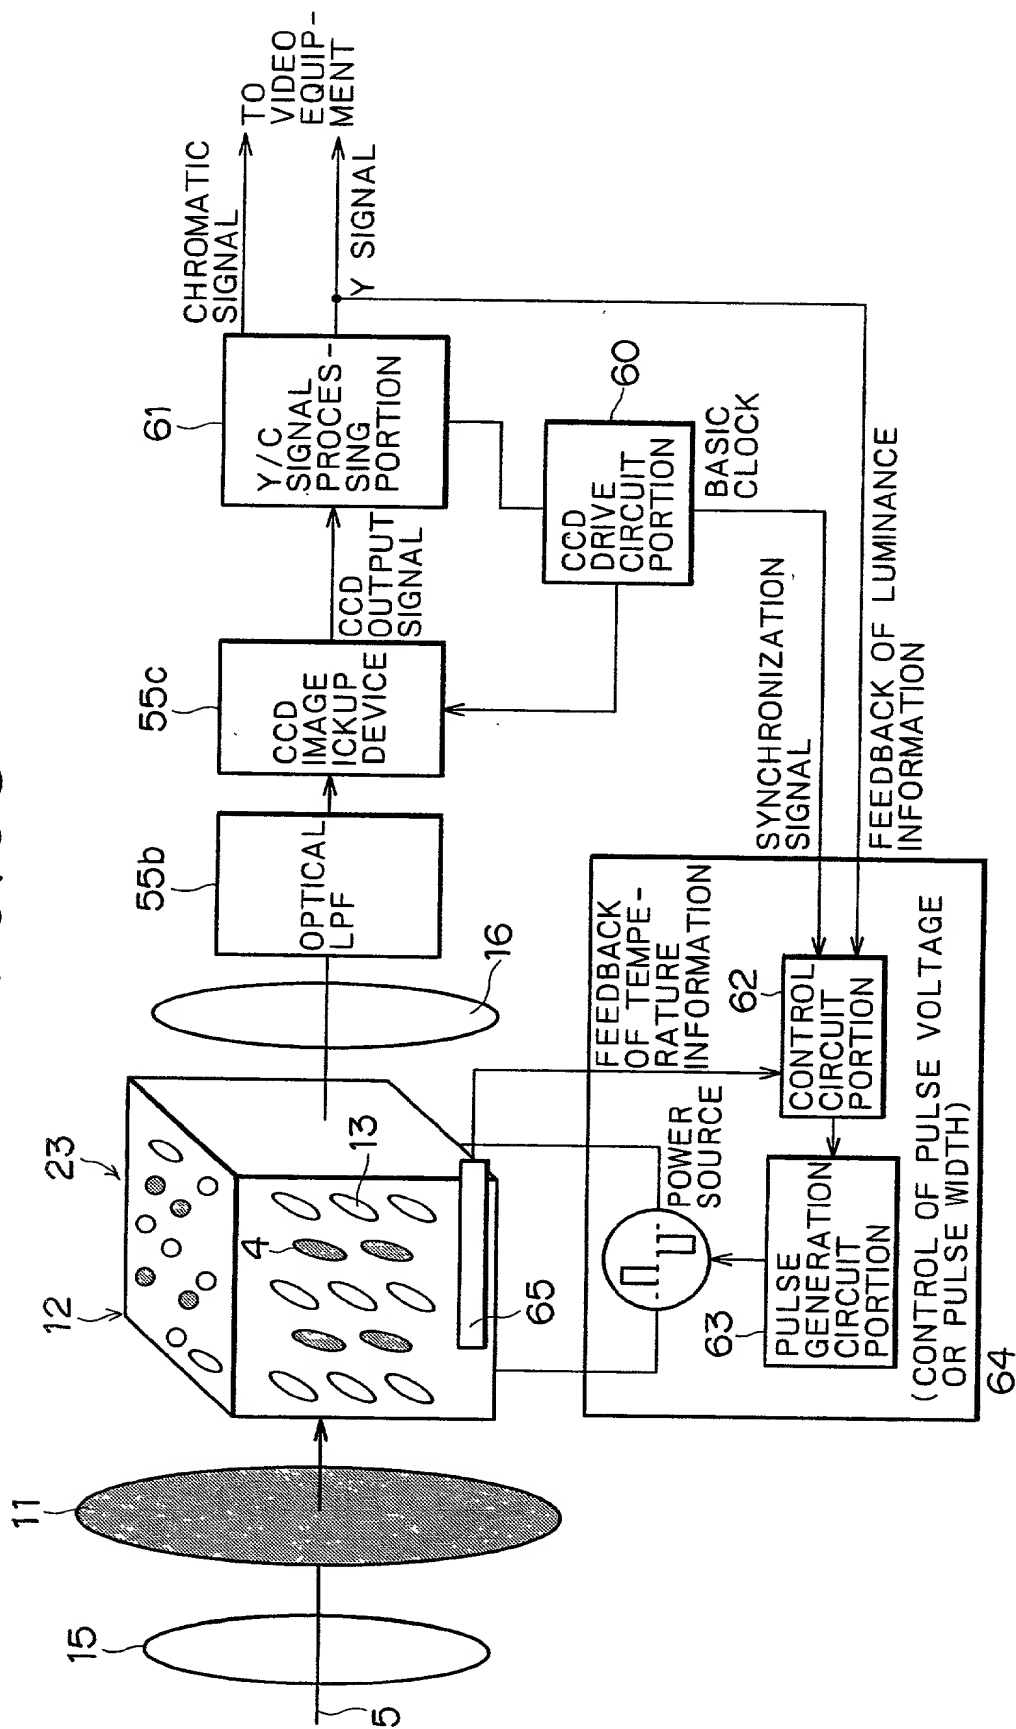

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者である（下記の名称が複数の場合）信じています。

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

__月__日に提出され、米国出願番号または特許協定条約国際出願番号を__とし、
（該当する場合）__に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

“LIGHT MODULATION APPARATUS AND IMAGE PICKUP APPARATUS, AND DRIVE METHOD THEREOF”

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as **United States Application Number** or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

P11-322184	Japan	November 12, 1999
P11-322185	Japan	November 12, 1999
P11-322186	Japan	November 12, 1999
P11-322187	Japan	November 12, 1999
P2000-319879	Japan	October 19, 2000

(Number) (番号)	(Country) (国名)	(Day Month Year Filed) (出願年月日)
------------------	-------------------	-----------------------------------

(Number) (番号)	(Country) (国名)	(Day Month Year Filed) (出願年月日)
------------------	-------------------	-----------------------------------

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or Inventor's certificate or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or Inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

Priority Not Claimed

優先権主張なし

(Number)	(Country)	(Day Month Year Filed)
----------	-----------	------------------------

(Number)	(Country)	(Day Month Year Filed)
----------	-----------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or 365(c) of an PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: patented, pending, abandoned)
(現況: 特許許可済、係属中、放棄済)

Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: patented, pending, abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第8編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named Inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

David R. Metzger (Reg. No. 32,919), Joseph A. Mahoney (Reg. No. 38,956), Howard B. Rockman (Reg. No. 22,190), Jordan A. Sigale, (Reg. No. 39,028), Michael A. Molano (Reg. No. 39,777), Michael L. Kiklis (Reg. No. 38,939), Janelle D. Strode (Reg. No. 34,738), Kevin W. Guynn (Reg. No. 29,972), Jennifer Hammond (Reg. No. 41,814), Lana Knedlik (Reg. No. 42,748), John F. Griffith (Reg. No. 44,137), Marina Saito (Reg. No. 42,121), Alison P. Schwartz (Reg. No. 43,863), Christopher P. Rauch (Reg. No. 45,034), Francisco Rubio-Campos (Reg. No. 45,358), Brian J. Gill (Reg. No. 46,727) and Shashank S. Upadbye, all members of the firm of Sonnenschein, Nath & Rosenthal

Send Correspondence to:

書類送付先

David R. Metzger
Sonnenschein Nath & Rosenthal
P.O. Box #061080
Wacker Drive Station
Chicago, Illinois 60606-1080

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

312/876-2578

Japanese Language Declaration

(日本語宣言書)

唯一または第一発明者名	Full name of sole or first inventor: KEIICHI NITO
発明者の署名 日付	Inventor's signature Date
住所	Residence Tokyo, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Sony Corporation 7-35, Kitashinagawa 6-chome
	Shinagawa-ku, Tokyo 141, Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

第二共同発明者	Full name of second joint inventor, if any: TORU UDAKA
発明者の署名 日付	Inventor's signature Date
住所	Residence Kanagawa, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Sony Corporation 7-35, Kitashinagawa 6-chome
第二共同発明者	Full name of third joint inventor, if any:
発明者の署名 日付	Inventor's signature Date
住所	Residence
国籍	Citizenship
私書箱	Post Office Address

Japanese Language Declaration

(日本語宣言書)